

FUJITSU

# PRODUCT CATALOGUE 2018


AIR CONDITIONERS LINEUP



FUJITSU GENERAL LIMITED

A professional woman with blonde hair and glasses, wearing a dark blue blazer over a white collared shirt, is seated in a modern office chair, reading a newspaper. She is positioned in front of a large window that looks out onto a cityscape. To her left, a glass-topped conference table with metal legs is partially visible. The room has a light-colored wooden floor and a white ceiling with recessed lighting. The overall atmosphere is bright and modern.

OUR  
SOLUTION  
FOR  
ALL LIFE  
SCENES



Fujitsu General provides comfortable and economical air conditioning systems that fit architectural trends and environmental awareness in Europe  
– from business scene to lifestyle scene.

## INDEX

**004 OUR MESSAGE**  
INNOVATION & GLOBALIZATION

006 DESIGN FOR COMFORT  
008 DESIGN FOR CONTROL  
010 DESIGN FOR FUTURE  
012 HISTORY  
014 WORLD WIDE LOCATIONS  
016 GLOBAL BUSINESS ACTIVITIES  
018 PROJECT REFERENCES  
020 GLOBAL DEVELOPMENT & PRODUCTION BASES  
022 HIGH QUALITY DEVELOPMENT & PRODUCTION FACILITIES

**024 2018 NEW PRODUCTS**

**026 SOLUTIONS**

028 For LIGHT COMMERCIAL  
036 For COMMERCIAL  
038 For RESIDENTIAL

**040 PRODUCT LINEUP**

**040 SPLIT & MULTI SPLIT**  
For LIGHT COMMERCIAL, RESIDENTIAL

**136 VRF**  
For LIGHT COMMERCIAL, COMMERCIAL, RESIDENTIAL

**186 CONTROL SYSTEM & OPTIONAL PARTS**

**238 AIR TO WATER**

**256 SUPPORT**

258 AIRSTAGE™ SUPPORT  
260 AIRSTAGE™/RAC SUPPORT TOOL  
262 WATERSTAGE™ SUPPORT TOOL  
264 QUICK SERVICE & MAINTENANCE  
266 SERVICE TOOL  
267 WEB MONITORING TOOL

003



OUR MESSAGE  
**INNOVATION**  
**& GLOBALIZATION**

Providing a Brand New Tomorrow to Everyone on Earth



HISTORY



WORLD WIDE LOCATIONS



GLOBAL BUSINESS ACTIVITIES



PROJECT REFERENCE



GLOBAL DEVELOPMENT & PRODUCTION BASES



HIGH QUALITY DEVELOPMENT & PRODUCTION FACILITIES



OUR MESSAGE



Cassette Circular Flow: Beautiful designs from all angles

# DESIGN FOR COMFORT

Fujitsu General has developed and commercialized numerous world-first technologies with a commitment to real comfort. This concept also applies to our designs. We will continue to pursue the possibilities of air conditioners and provide new comfort in the future.



KX Series **nocria™ X**

# Comfort by Design with Advanced Technology



\*1, \*2, \*3, \*4


- \*1: Announced 2012. In room air conditioner for the home (Our company's investigation)
- \*2: Announced 1994. In room air conditioner for the home (our company's investigation)
- \*3: Announced 2012. In room air conditioner for the home (Our company's investigation)
- \*4: Announced 1991. In room air conditioner for the home (our company's investigation)



The Dual Side Fans<sup>\*1</sup>



Power Diffuser<sup>\*2</sup>

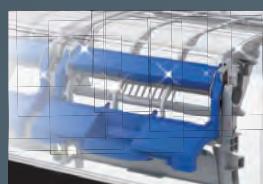

Filter Auto Clean<sup>\*3</sup>



Lambda Heat Exchanger<sup>\*4</sup>

The Dual Side Fans equipped to our flagship "nocria X" model optimally control the airflow. Their distinctive form delivers comfortable airflow to the corners of room. The Power Diffuser opens the lower flap of the main unit to blow warm air downward. This heats up rooms from the floor to increase heating efficiency.

Lambda Heat Exchanger improves the operating efficiency and expands the possibilities of design, such as compactness of indoor units.

Moreover, we have developed the automatic cleaning of filters for the first time to ensure maintenance and operating efficiency.

Fujitsu General is developing unique technologies to provide pleasant spaces.

## Comfortable Airflow Design



Circular airflow control without temperature unevenness.



### Cassette Circular Flow

- Improved installation in office environments
- Optimum operation by monitoring the room temperature and people's movement with optional sensor

## Beautiful Space Design



Compact Cassette Grid Type for VRF system: This fits grid ceiling system.




KG Series Wall Mounted: KG Series



LT Series Wall Mounted: Many globally authoritative design awards attained.



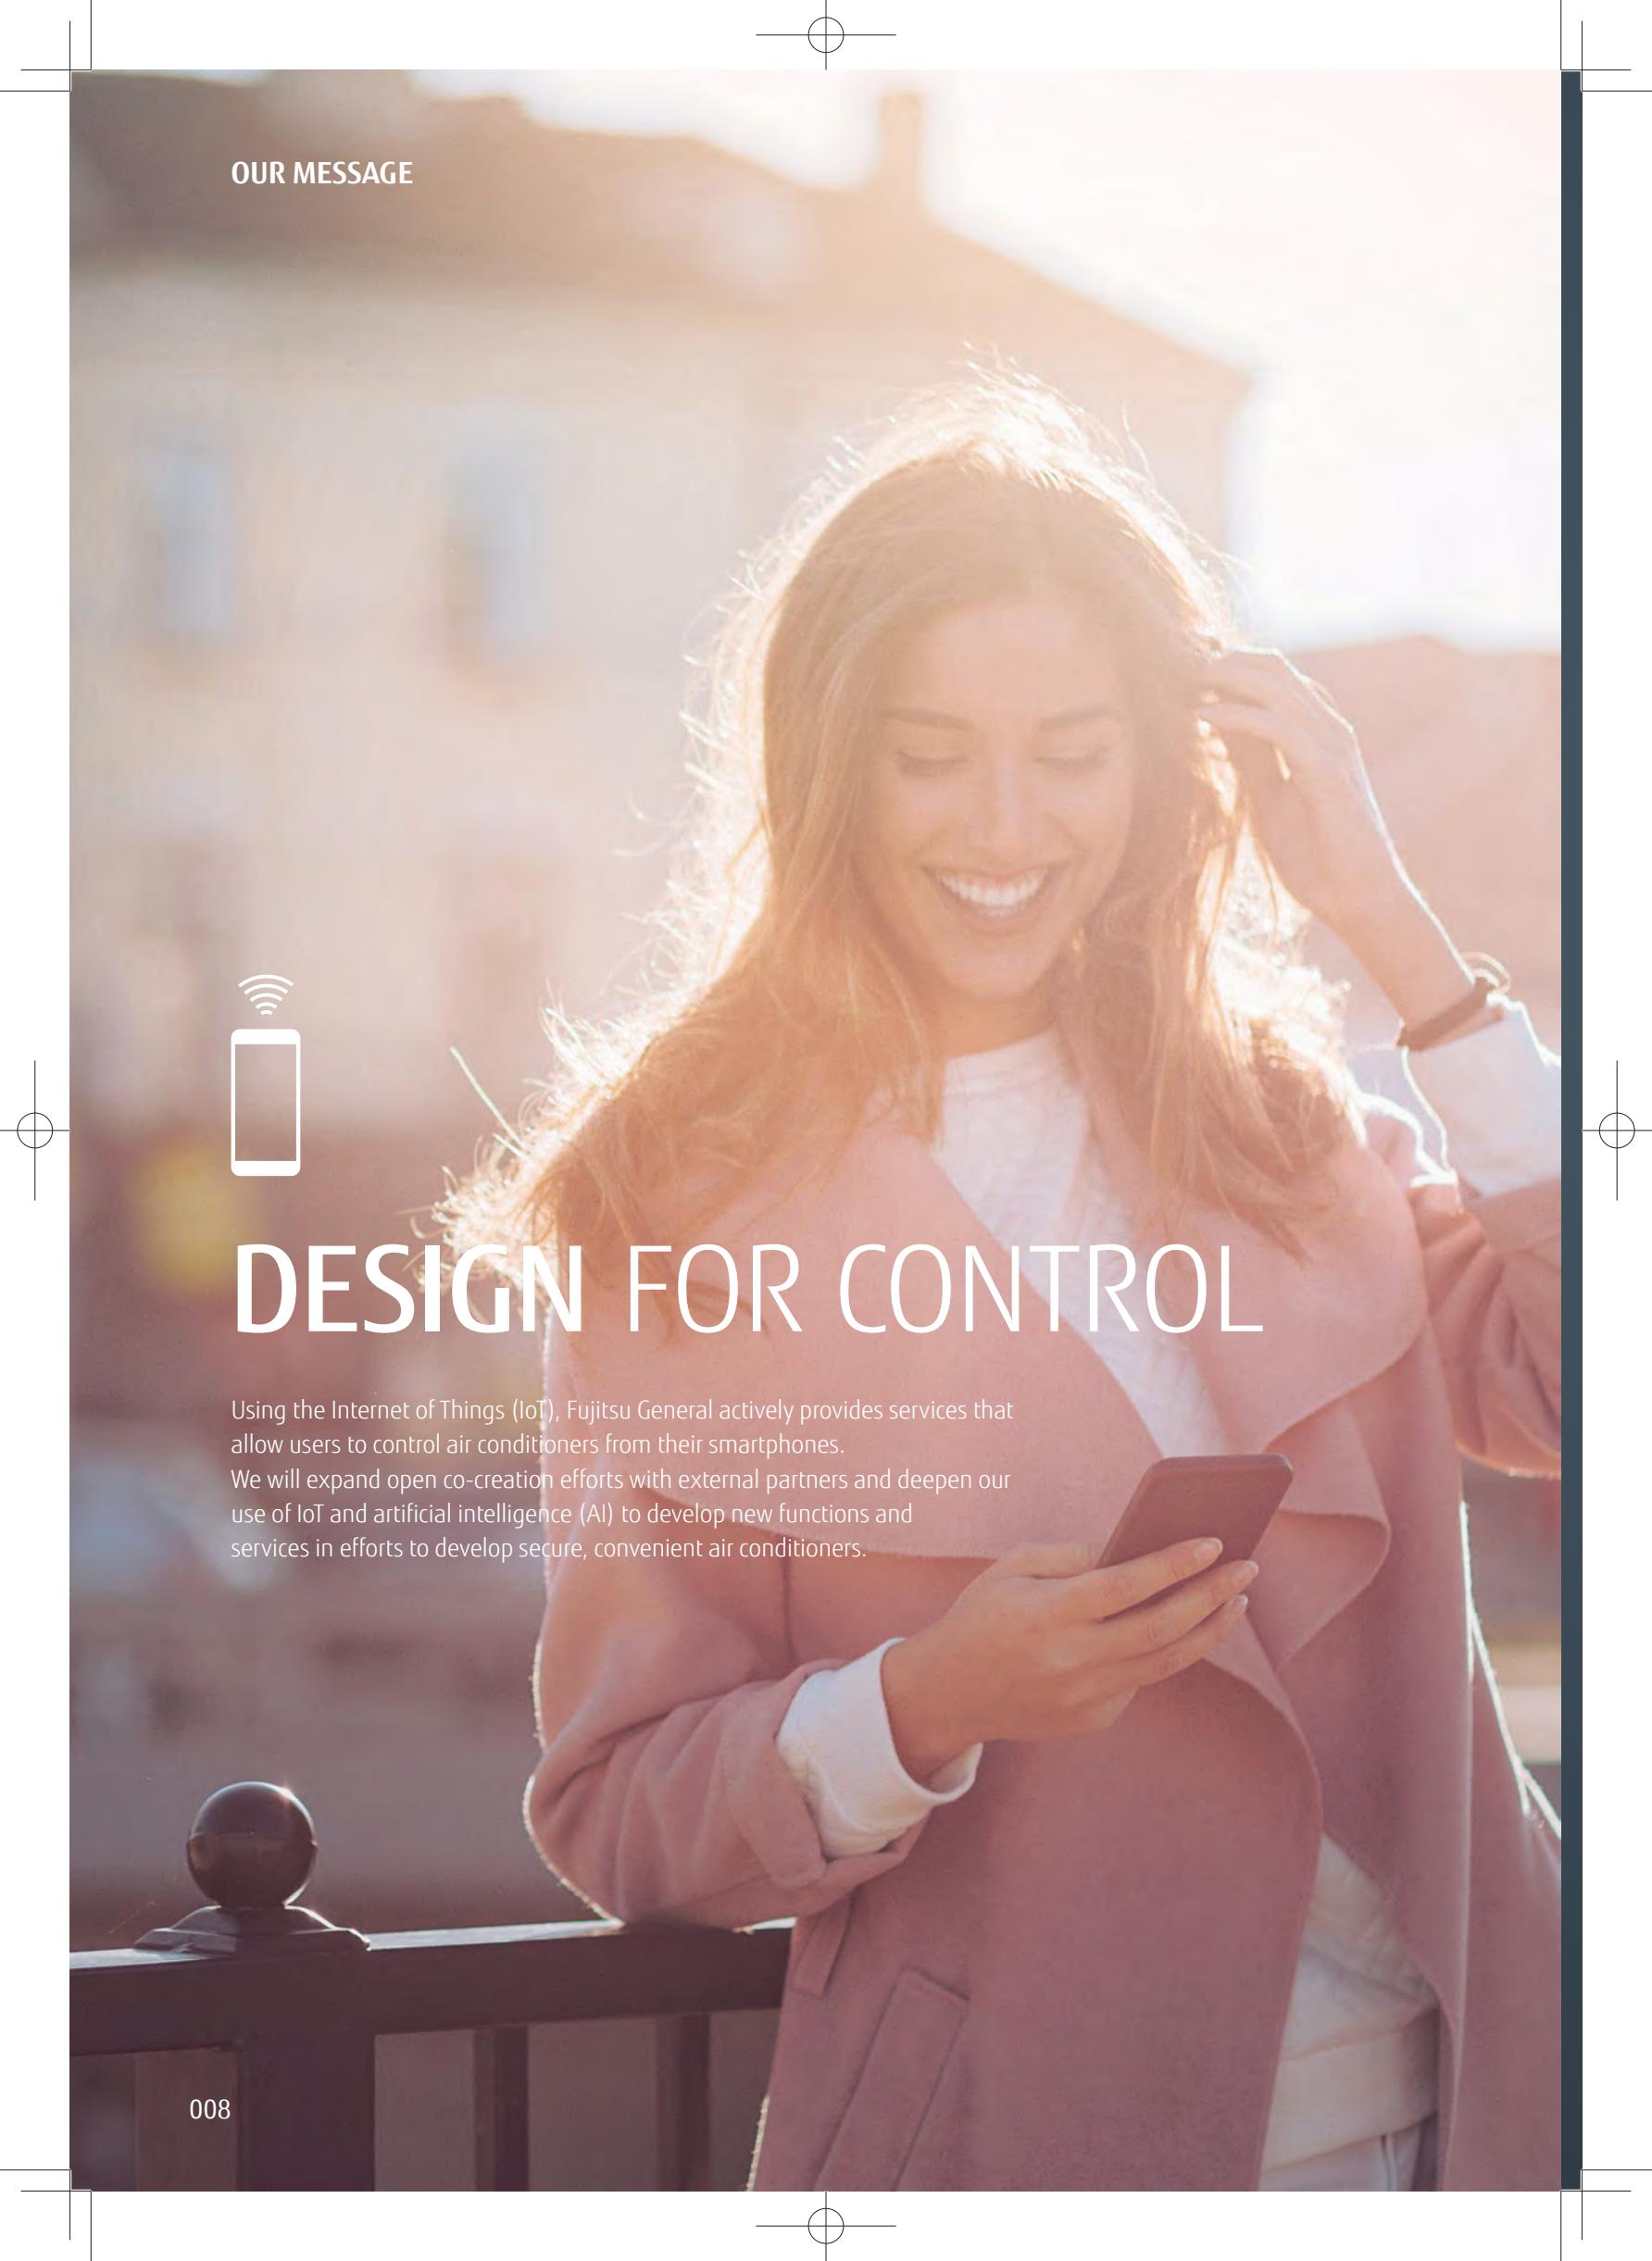

OUR MESSAGE



# DESIGN FOR CONTROL


Using the Internet of Things (IoT), Fujitsu General actively provides services that allow users to control air conditioners from their smartphones.

We will expand open co-creation efforts with external partners and deepen our use of IoT and artificial intelligence (AI) to develop new functions and services in efforts to develop secure, convenient air conditioners.

# Operation from Anywhere

If you forget to turn off your system before you left your home - no problem!


"FGLair" is an application software that enables you to operate the Fujitsu General's air conditioner(s) with a mobile device from anywhere out of your home or when you are on travelling.

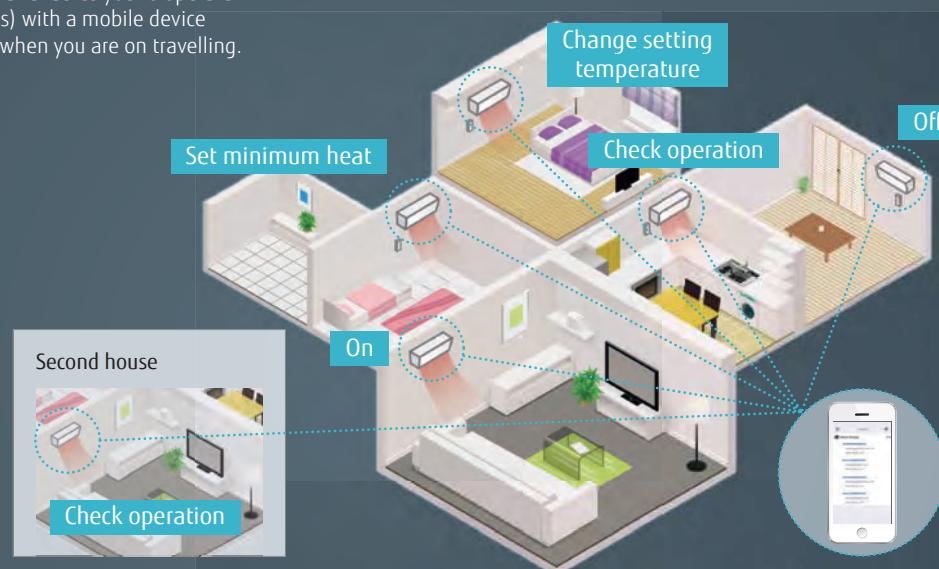

## User Friendly Interface

User friendly screen display facilitates easy operation.

By using our Wireless LAN Interface and "FGLair" app, you can control your home's cooling and heating anytime and anywhere.

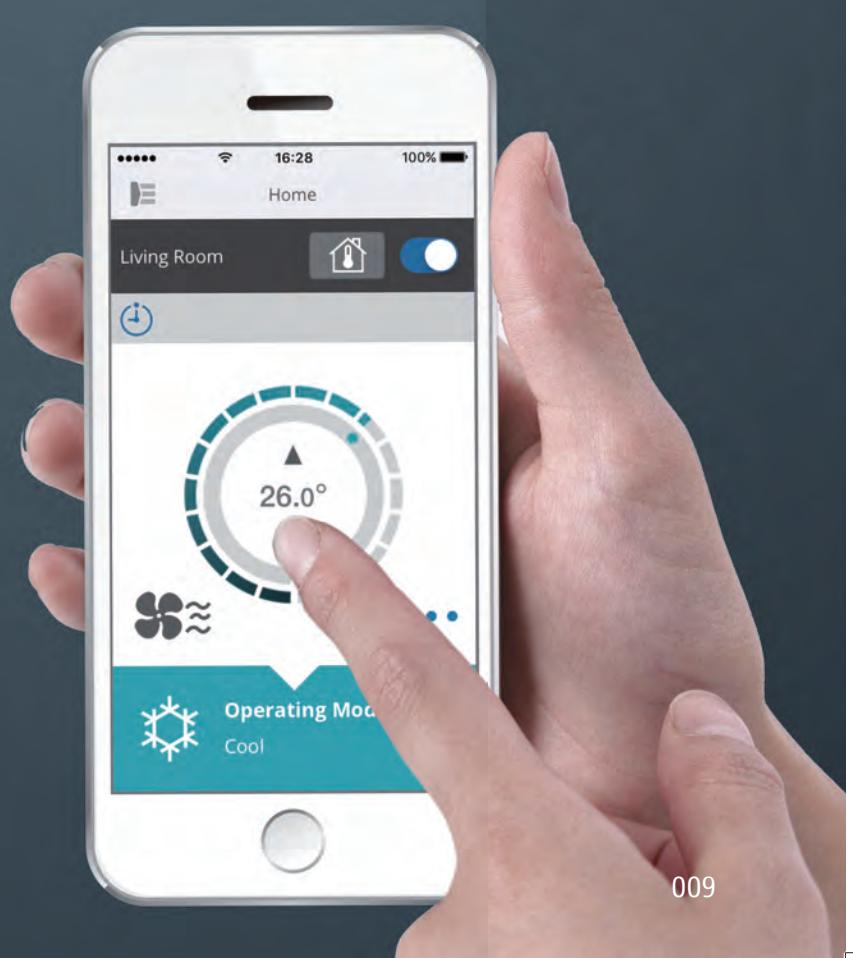



OUR MESSAGE



# DESIGN FOR FUTURE

We provide reliable technologies approved and cultivated in the European market where environmentally friendly regulations are very strict. We are working on making environmentally friendly products we can be proud of in the future in our research, development and manufacturing processes.



## Design with small refrigerant

Significantly reduce the system refrigerant volume by new small indoor unit, piping design and optimized heat exchanger volume design. The minimized refrigerant volume may allow the application to prevent the installation of a refrigerant leak detector required under EN 378.

**AIRSTAGE™ J-III L**

# Green Aspect for Refrigerant

## EU strengthen F-gas Regulation introduced 2014.

New EU F-gas Regulation aims prevention of emissions and reduction the use of higher GWP F-gases.

### Key elements

- Phase down approach
- Quota allocation
- Restrictions on the placing on the market
- Traceability of HFC contained in pre-charged equipment


Fujitsu General work on the reduction of HFC with innovative efforts

## New refrigerant R32 for the reduction of the global warming potential.

### Key points

- The ozone-depleting potential (ODP<sup>\*1</sup>) is 0!
- Environmental properties
- Performance
- Economic efficiency

Models equipped with the New R32 Refrigerant

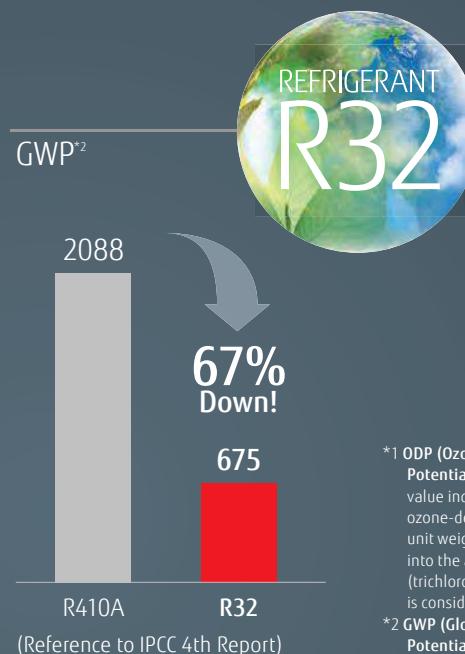

<sup>\*1</sup> ODP (Ozone-Depleting Potential): This is the relative value indicating the impact of ozone-depleting substances per unit weight if they are emitted into the atmosphere when CFC-11 (trichlorofluoromethane, CCl<sub>3</sub>F) is considered to be 1.0.

<sup>\*2</sup> GWP (Global-Warming Potential): This is the number that indicates the global warming capability of other greenhouse gases with reference to carbon dioxide as the standard. This is the estimated integration value, which is indicated as a ratio to CO<sub>2</sub>, of the radiant energy given to the earth (i.e., impact on global warming).

# Our Pioneering Efforts Make Green Future

Approach to new energy efficiency standard Fujitsu General following the EU climate action plan 20/20/20 by 2020.

## 20% Less Primary Energy Use

Fujitsu General products with high efficiency and therefore low electricity

## 20% Less CO<sub>2</sub> Emissions


Fujitsu General products sharply following the F-gas regulation 842/2006/EC

## 20% Share of Renewable Energy

Fujitsu General promoting air sourced heat pumps as renewable energy source heating systems

## New Energy Labelling Requirement 626/2011/EU:

Our Air Conditioners have reached the "Class A" ranking, the highest energy efficiency level that is now shown on energy labels in Europe.

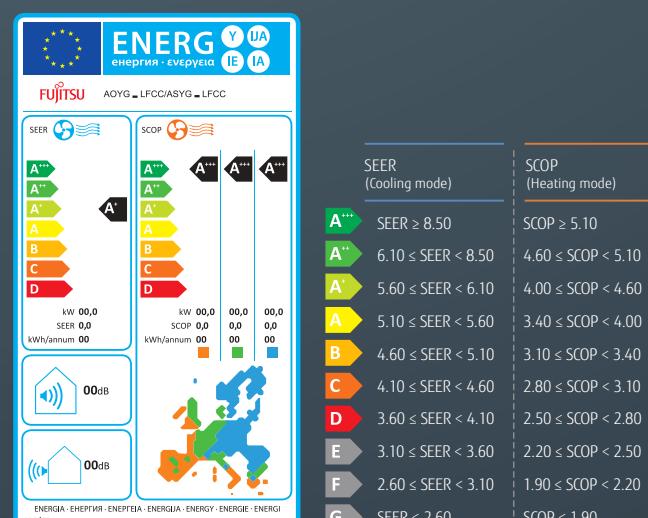

## OUR MESSAGE



# HISTORY

1936 Established as Yaou Shouten Ltd.

## Overseas Air Conditioning Business since 1971



1960

Air conditioning business starts.  
Japan-domestic business starts.

# 1971

Air conditioner exports to  
Middle East.



1977: "Super Power, Super Quiet" series

1982: Window type 3 Super series

AL/AX series

1985: Large wall mounted and multi air conditioner introduced.

### Manufacturing Company Establishment

1955: Headquarters in Kawasaki  
1964: Electronic components factory in Ichinoseki



### Sales Company Establishment



Fujitsu General (EURO) GmbH



Fujitsu General (U.K.) Co., Ltd. (U.K.)



For LIGHT COMMERCIAL

2004

Standalone type small VRF AIRSTAGE™ J series is released.

2011: High energy saving type AIRSTAGE™ J-II series is released.

2014: Small & lightweight outdoor unit

AIRSTAGE™ J-IIS that has improved easy installation with a single fan is released.

**AIRSTAGE J-IIIS**



For COMMERCIAL

2001

AIRSTAGE™ series is released. VRF air conditioners for large-sized buildings.

2006: VRF Heat Pump type Max. 42 HP AIRSTAGE™ V series is released.

2009: Heat Pump Modular type Max. 48 HP AIRSTAGE™ V-II series is released.



For RESIDENTIAL

### World First Advanced Technology

1991

Air conditioner with the world's first lambda heat exchanger



1994

Air conditioner with the world's first power diffuser



2002 **nocria™**

Air conditioner with the world's first automatic self-cleaning filter system



1976: North America sales company  
1977: Europe sales company (UK)  
1978: Australia sales company / Europe sales company (Germany)  
1980: Brazil sales company  
1997: Asia sales company (Singapore)  
1998: Middle East sales company (UAE) / New Zealand sales company

# 2018

2016: Small VRF AIRSTAGE™ J-III that has advanced energy saving and easy installation is released.

**AIRSTAGE™ J-III**



2017


New small VRF AIRSTAGE™ J-III(L) suitable for diverse light commercial properties is released.

**AIRSTAGE™ J-III(L)**



2012: Heat Recovery Modular type  
Max. 48 HP

**AIRSTAGE™ VR-II**

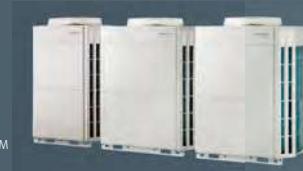

**AIRSTAGE™ V-III**

2014-2015:  
Heat pump modular type AIRSTAGE™ V-III max. 54 HP ideal for large properties is released



NEW

Light commercial model that has advanced space saving and quietness

**AIRSTAGE™ J-III(L)**

14/16 HP models



Cassette type equipped with new panel to fit the grid ceiling system is added to our lineup.

## Stylish & Comfortable Design

2011  
Hi-spec Design model



2015-2016  
Cassette Circular Flow is released.  
Comfortable room air conditioning without airflow feeling



**WATERSTAGE™**

2009: Air to Water system is released.  
2014: Air to Water system Monobloc type Compact series is released.



2006: VRF air conditioner manufacturer, sale, and service company in China.

2007: Air conditioner technology building completed on Main Office group. Air conditioner R&D Center in Kawasaki

2009: Operation of compressor factory begins in Thailand.

2012: Joint venture in Thailand to manufacture compressors

2016: Commercial use air conditioner R&D Center in Thailand



2017  
Flagship Wall Mounted models

**KX nocria X**



2018  
Stylish & Compact Wall Mounted models



NEW

High capacity models that increase heating efficiency are added to our lineup.

**WATERSTAGE™**

15/17 kW models



2000: Air conditioner manufacturing and sale technical partnership in India

2002: Taiwan sales company

2006: China sales company

2016: THE AIRSTAGE on Broadway in New York

\*3. Announced 2002. In room air conditioner for the home (our company's investigation) \*4: Announced 2012. In room air conditioner for the home (Our company's investigation)

## OUR MESSAGE



# WORLD WIDE LOCATIONS

Promoting Globalization from a global perspective while emphasizing the actual local situation in the field under the aim of advancing our five-base system (Europe, Middle East, Asia & Oceania, Americas, and Japan)



JAPAN Head Office

- Air conditioner solution center  
"THE AIRSTAGE" in Manhattan, New York

- Fujitsu General America, Inc.

- Fujitsu General Do Brasil Ltda.

13 Overseas Sales Companies



Fujitsu General Orient  
International Electronics Sales  
(Shanghai) Co., Ltd. (China)



Fujitsu General (Taiwan) Co., Ltd.



Fujitsu General (Thailand) Co.,Ltd.  
Bangkok Office



Fujitsu General (Asia) PTE. Ltd.  
(Singapore)



Fujitsu General (EURO) GmbH



Fujitsu General (U.K.) Co., Ltd. (U.K.)



Fujitsu General Air Conditioning  
(UK) Limited



Fujitsu General (Aust.) Pty Ltd.  
(Australia)



Fujitsu General New Zealand Ltd.  
(New Zealand)



Fujitsu General (Middle East) FZE  
(U.A.E.)



Fujitsu General Do Brasil Ltda. (Brasil)



Fujitsu General America, Inc.

FUJITSU GENERAL SOLUTION  
CENTER 'THE AIRSTAGE'

## OUR MESSAGE



# GLOBAL BUSINESS ACTIVITIES

We are engaging in advertising, human resource development, CS activities, and social contribution activities worldwide. These activities have been recognized throughout different regions by the awards we have been honored with.

## North/South America



AHR Expo



HVAC trade show in Brasil



Distributor meeting



Call center

## Middle East



Distributor meeting




Technical seminar



Training for dealers

## Europe

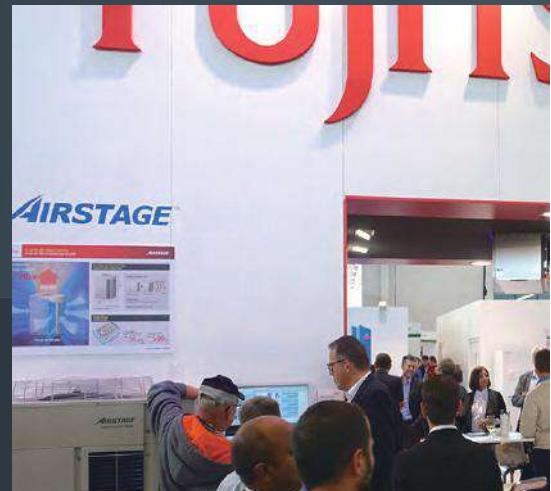

HVAC trade show in Europe countries



Presentation & training

## International authoritative design awards



"Dealer Design Awards" of "the NEWS"




Gold Award (Category: HVAC & PLUMBING) in Reader's Choice Awards



TOP OF MIND 2016" First prize in "MARCA DE EQUIPAMENTO DE AR-CONDICIONADO" category of "CLIMATIZACAO" division



The iF Product Design Award is given each year by "iF International Forum Design GmbH" for industrial products from around the world.



## Oceania



HVAC trade show in Australia



ACR Show



Charity (Christchurch)



Service & Maintenance

## Asia



New Product Presentation Meeting, Sales store awards



FG TAIWAN Entire employee workshop



SE training



Call center



reddot design award  
winner 2012

The product design competition has existed since 1955. Its award, the "red dot", is an internationally recognized quality seal.



Coolworld Industry  
Awards  
"Most Efficient Air  
Conditioner"



China State Construction  
Engineering Luban Prize



Canstar Blue Most  
Satisfied  
Customers Award



The Good Design Award is  
sponsored by the Japan Institute  
of Design Promotion and is  
awarded once a year for an item  
of excellent design.

## OUR MESSAGE



# PROJECT REFERENCE

Our product is popular because of its high quality, energy saving, and easy installation, and so has been installed in a wide range of building types including high-rise office buildings, stores, hotels, public facilities, schools, hospitals and residential.



Fujitsu General's Products have been installed in over 50 countries worldwide.



## For LIGHT COMMERCIAL

- 1 Shop in Asia
- 2 Restaurant in Middle East
- 3 Office in Europe
- 4 Hotel in Oceania
- 5 School in U.S.A.
- 6 Hospital in Asia



## For COMMERCIAL

- 7 Office in Europe
- 8 Office in Europe
- 9 Hotel in Asia

## For RESIDENTIAL

- 10 Residential in Europe
- 11 Residential in Europe
- 12 Residential in Oceania
- 13 Residential in Middle East

OUR MESSAGE



# GLOBAL DEVELOPMENT & PRODUCTION BASES

R&D centers are set up in five countries of Japan, Europe, Asia, China and North America in the world. We pursue the environmental property and comfort to meet each area needs.



## 5 R&D Center



R&D Center in Fujitsu General (Shanghai)



R&D Center in Fujitsu General Engineering (Thailand)



R&D Center in Fujitsu General (EURO) GmbH (Germany)



R&D Center in Fujitsu General America (U.S.A.)

# 6 Overseas Manufacturing Companies

- Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd.
- F.G.L.S Electric Co., Ltd.

- Fujitsu General Limited  
— R&D Center

- Fujitsu General (Shanghai) Co., Ltd.  
— R&D Center

- Fujitsu General Engineering (Thailand) Co., Ltd.  
— R&D Center
- FGA (Thailand) Co., Ltd.
- TCFG Compressor (Thailand) Co., Ltd.



Fujitsu General (Shanghai) Co., Ltd.



F.G.L.S. Electric Co., Ltd.



Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd.



FGA (Thailand) Co., Ltd.



Fujitsu General (Thailand) Co., Ltd.  
Fujitsu General Engineering (Thailand) Co., Ltd.



TCFG Compressor (Thailand) Co.,Ltd.

JAPAN Head Office  
R&D Center and 60 m Height Difference  
Testing Tower



## OUR MESSAGE



# HIGH QUALITY DEVELOPMENT & PRODUCTION FACILITIES

Fujitsu General is one of Japan's leading manufacturers with an R&D Center in Japan. We provide customers with the highest quality and performance using these facilities.

## Advanced Research Facility and Equipment

### Performance Testing



### Reliability Testing



### Transportation & Handling



## Testing Laboratory

### Fujitsu General EMC Laboratory Limited



### 60 m Height Difference Testing Tower

Objective is to confirm oil circulation of compressor for reliability



# ACQUISITION OF ISO 9001 AND ISO 14001

Each of overseas production bases (5 companies) has completed the acquisition of ISO 9001 and ISO 14001 individually. In 2012, overseas sales bases (11 companies) acquired the certification of ISO 14001.



## High Product Quality Assurance


All Fujitsu General factories have acquired ISO 9001, and have built a quality control system common around the world. High quality products are offered to all over the world based on stringent quality inspections.

### Receiving inspection

Parts procurement requires a supplier's test report. European regulation RoHS inspection is also performed by special test department in-house. Total number inspection is performed especially on main parts to remove defectives.

### Stringent product quality inspection

Stringent quality inspection is carried out at all production processes. High quality is maintained by stringent checks by inspectors and repetitive inspection.

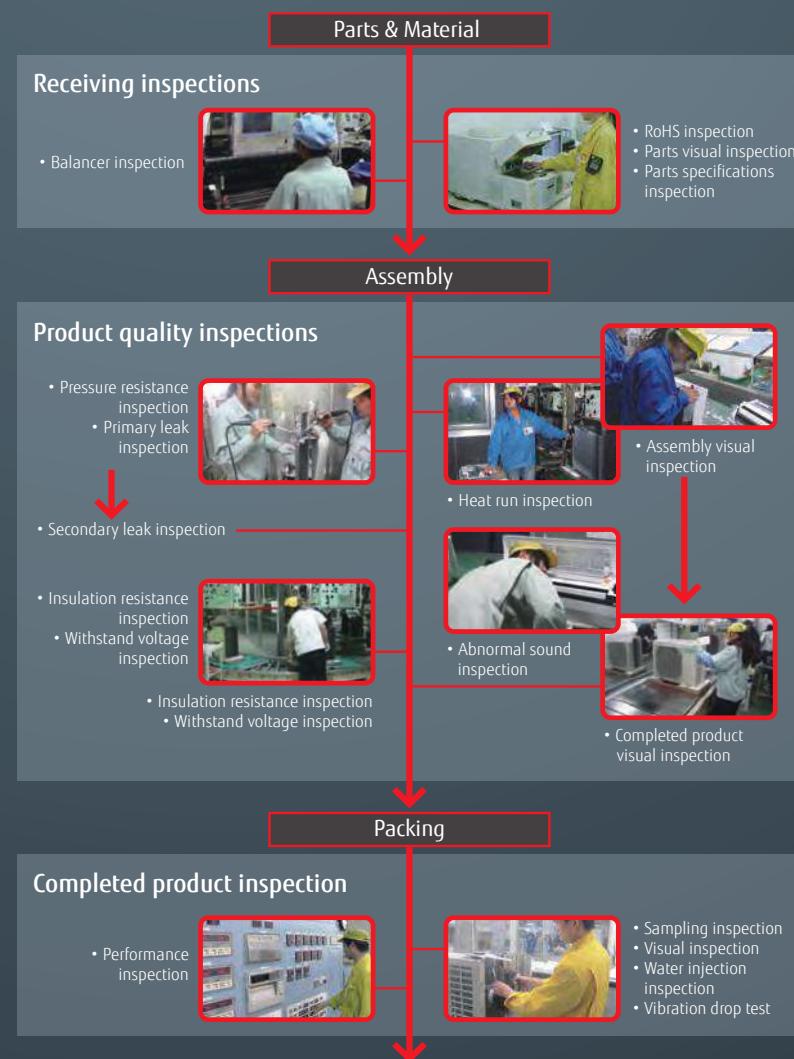

# 2018 NEW PRODUCTS



SPLIT



KM  
Series

**Wall Mounted** Standard Range Series  
High Efficiency & Comfort

Page 060

- 7/9/12/14 class 4 models
- High performance and low noise model with an emphasis on its design
- Slim & stylish square design
- High energy saving
- Comfortable airflow & silent operation




KL  
Series

**Wall Mounted** ECO Range Series  
Comfort for Large Room

Page 062

- 18/24 class 2 models
- Narrow width & compact design
- Powerful & economy operation

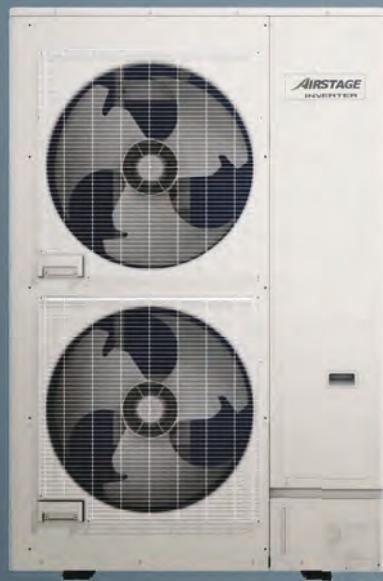

## AIRSTAGE™ J-III L

14/16 HP models

Page 150

- 14/16 HP 2 models
- For light commercial use outdoor units
- Refrigerant saving design to keep down initial costs
- Quiet design suitable for the noise sensitive properties such as small offices in urban areas



VRF

### Indoor Units for VRF

Page 172 - 173

#### Compact Cassette Grid type

- 04-24 class 7 models
- Compact and stylish panel design
- Flexible installation
- Easy maintenance



#### Wall Mounted

- 12/14 class 2 models, 2 type (EEV Internal & EEV external)
- High efficient compact design
- More comfort airflow
- Human sensor increases more energy saving
- 6 Fan speed control




## AIR TO WATER

### Split type Super High Power Series

15/17 kW models

Page 244

- 15/17 kW class 3 phase 2 models
- Advanced heating capability at low outside temperature
- Enhanced anti-freezing functions in cold areas
- Quiet design against the noise when being operated at night

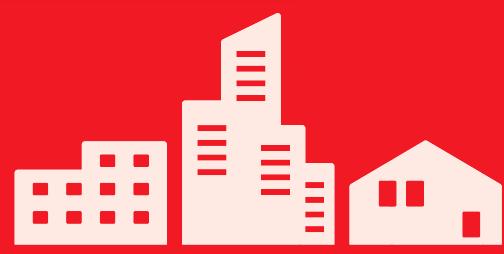

# SOLUTIONS

A casual conversation with a colleague at work


A presentation in a large meeting room

A restaurant you dropped by when going out

Your regular living room

We have a lineup of air conditioners ideal for all these situations – from business to private spaces.

The air conditioners of Fujitsu General can be found in various settings of life.



# Target Properties



## For LIGHT COMMERCIAL

We offer comfortable and economical air conditioning systems focused on small to medium-sized buildings.

**028 SHOPS, RESTAURANT**

**030 SMALL OFFICE**

**032 HOTELS**

**034 SCHOOL**

### Compatible Models



**SPLIT**



**SIMULTANEOUS MULTI**



**VRF AIRSTAGE™ J-Series**



## For COMMERCIAL

We provide single and modular type VRF systems designed for high efficiency, comfort, freedom of design, easy installation and high reliability.

**036 LARGE BUILDING**

### Compatible Models



**VRF AIRSTAGE™ V-Series**



## For RESIDENTIAL

We provide smart air conditioning systems with a wide range of control options for comfortable control and convenient use.

**038 RESIDENCE**

### Compatible Models



**SPLIT**



**MULTI SPLIT**

## All Products Range



**VRF AIRSTAGE™ V-Series**



**VRF AIRSTAGE™ J-Series**



**MULTI SPLIT**



**AIR TO WATER**



**RESIDENTIAL**



**LIGHT COMMERCIAL**

**COMMERCIAL**





SOLUTIONS


For LIGHT COMMERCIAL

# RESTAURANT, SHOPS

Fujitsu General provides perfect total air conditioning systems that offer smooth support by tenant, by purpose and by customer visit frequency in shops and restaurants with multiple lighting and a high density of customers.



## SINGLE SPLIT For RESTAURANT

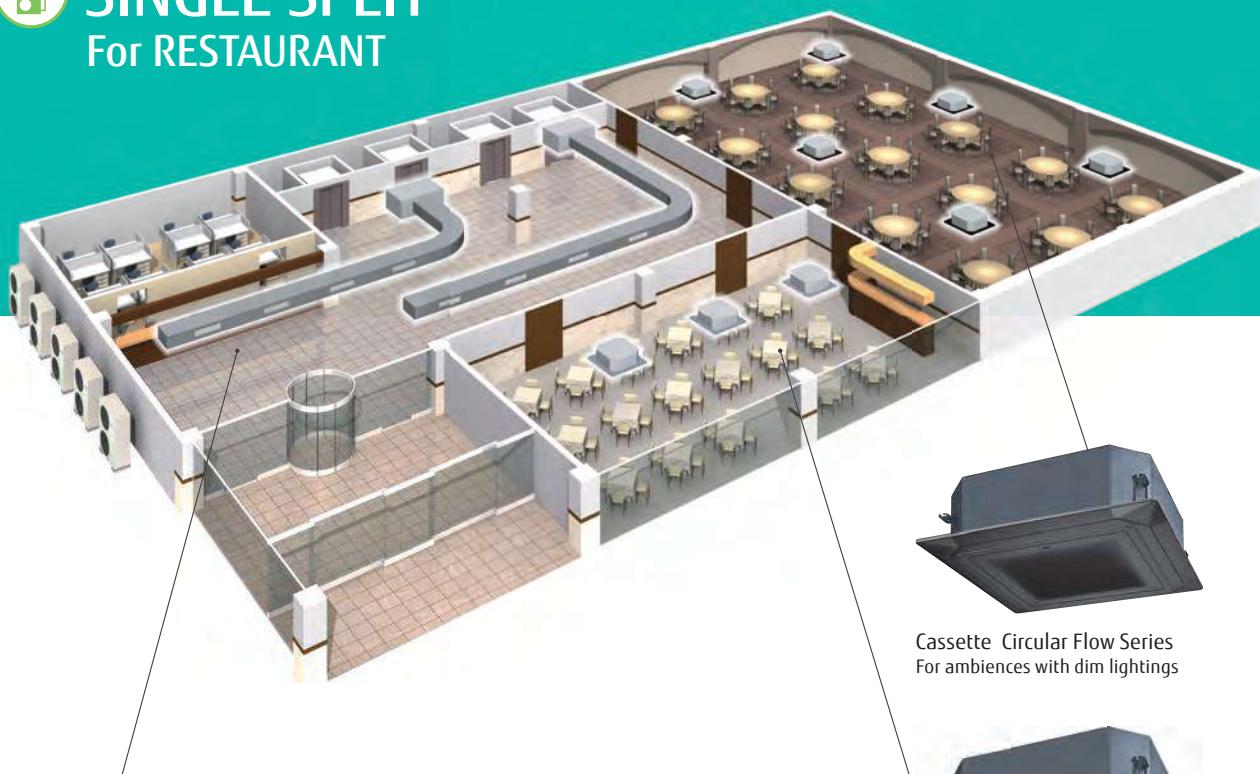

Cassette Circular Flow Series  
For ambiences with dim lightings



Cassette Circular Flow Series  
For bright Interior rooms etc.



### Appropriate air conditioning in the atrium space

Appropriate air conditioning of the high ceiling and glass-sided atrium space with a large duct system



092 Page

Big Duct



### Color variations by two panels

Both black and white panels are available for Cassette type. Black panel is suitable for the dark place such as a restaurant with atmosphere. White panel is usually used at bright areas such as offices. (Available to single split and VRF indoor units)



078 Page



## SIMULTANEOUS MULTI For SHOPS



72-90 Simultaneous Multi

### Space saving installation

Simultaneous multi type can connect up to four air indoor units. This large capacity model makes large spaces comfortable simultaneously. Furthermore, this is top class compact outdoor unit in the industry.

108 Page

### Various indoor unit lineup

We provide 5 types of indoor units. You can select them to suit the atmosphere and layout of your shop.

108 Page



Cassette Compact



Medium Static Pressure Duct



Cassette



Floor/Ceiling



Ceiling

### Low outside air temperature cooling air conditioning support

Low outside air temperature cooling operation is necessary in winter in stores with a lot of heat inside. Air conditioning system can be supported flexibility to allow cooling operation at -15°C





SOLUTIONS

For LIGHT COMMERCIAL

# SMALL OFFICES

Fujitsu General provides perfect total air conditioning systems that take into account energy saving, low noise, comfortable airflow, small room application and Centralized control for small-sized office buildings with many small rooms.

## AIRSTAGE™

NEW



### AIRSTAGE™ J-Series Up to 16 HP by compact outdoor unit


Small VRF system is suitable for the buildings with many small rooms. Max. 40\* indoor units can be connected.

\*Only J-IIIL 16 HP model

 138 Page ~

**Energy saving solution suitable for meeting rooms and business discussion rooms**



When there are no people in the room, save operation starts automatically to prevent unnecessary power consumption by linking up with a human sensor and external input/output kit.

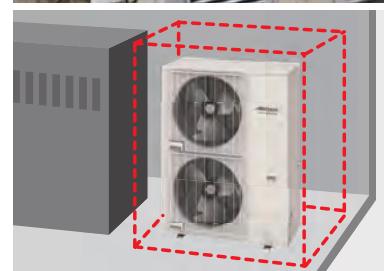

J-IIIL

### Compact and low noise design outdoor unit

This compact outdoor unit doesn't take up much space even if installed in a machine room or on the rooftop. This unit secures enough static pressure even if there are louvers. Low noise operation is possible at nighttime by a low noise mode.

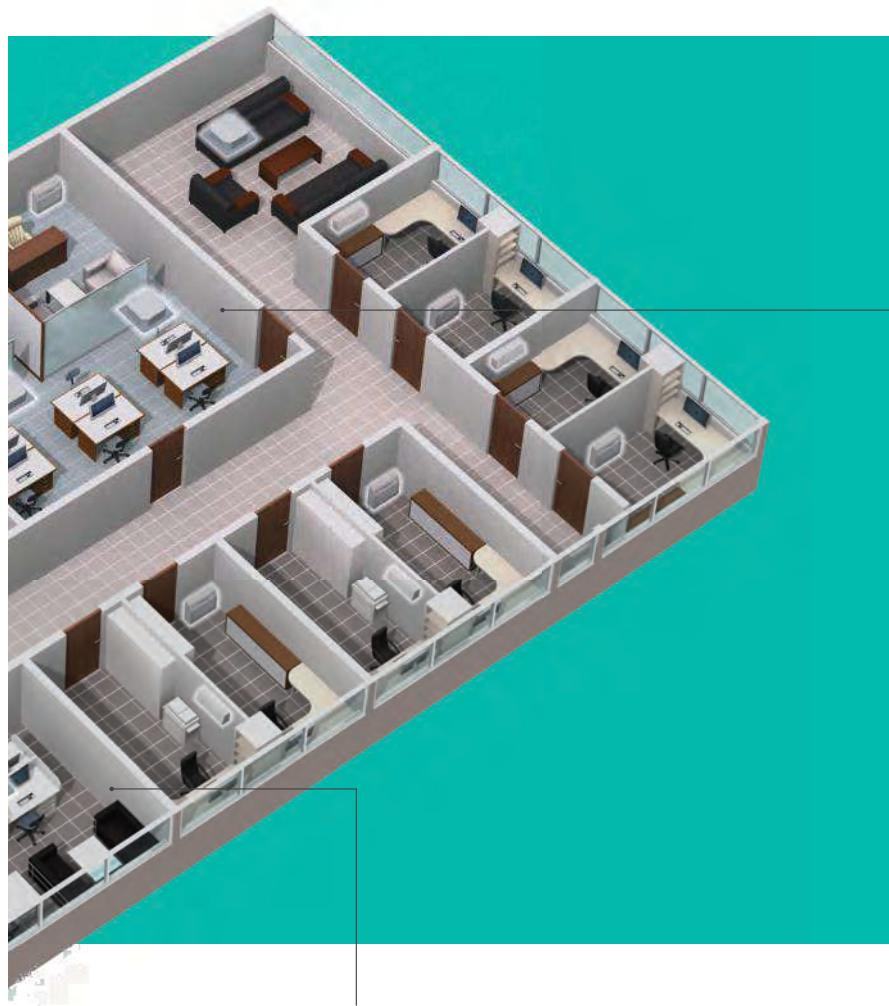


Compact Cassette Grid Type



## Centralized control of both air conditioning and ventilation equipment

It is possible to perform centralized control to stop the operation of lighting and ventilation equipment in addition to air conditioners. This is useful in energy saving management over the whole building.

208 Page

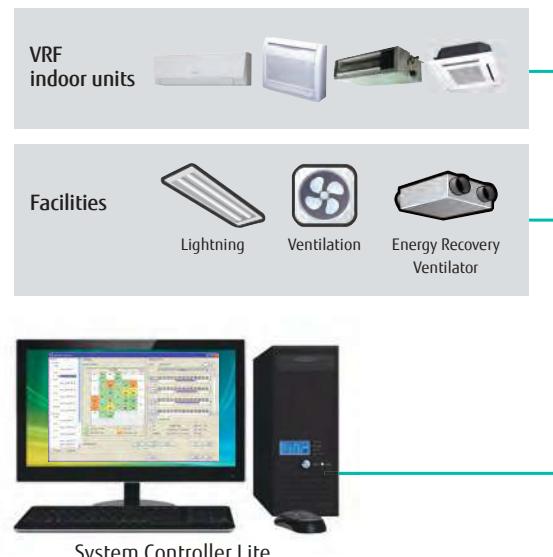

## New design panels ideal for grid ceiling

We have equipped a new 620 mm square design panel that is ideal for the grid ceiling found in many offices in Europe. Easy installation and finished beauty are enhanced by these new panels.

172 Page



## 1.1 kW personal air conditioning

Various range of low capacity 1.1 kW indoor units to suit small rooms or spaces.

175 Page ~





SOLUTIONS


# For LIGHT COMMERCIAL HOTELS

Fujitsu General provides perfect total air conditioning systems that take into account comfort, energy saving, external appearance, safety and easy installation for small low-rise hotels.

## AIRSTAGE™



J-III  
J-IIIL  
J-IIIIL  
High capacity model

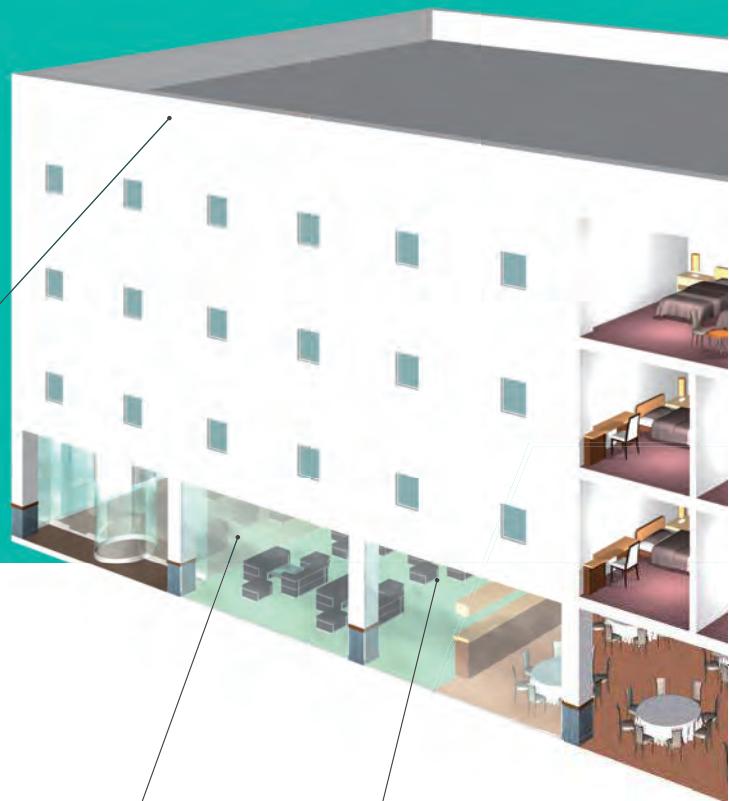

### AIRSTAGE™ J-Series Appearance-oriented compact outdoor unit

Due to the lowest and most compact design in the industry, the appearance of hotel is not damaged even when installed on the building.



 138 Page ~

### Large space air conditioning in the reception and lobby

Ultra-large duct type single split system suitable for large spaces with high ceilings



 092 Page



### Ventilation of the whole hotel supported

Outdoor air processing is essential in hotel spaces with a high degree of airtightness. The DX-Kit can link up with air conditioners to ensure sufficient ventilation.

This system can be expanded.



 184 Page

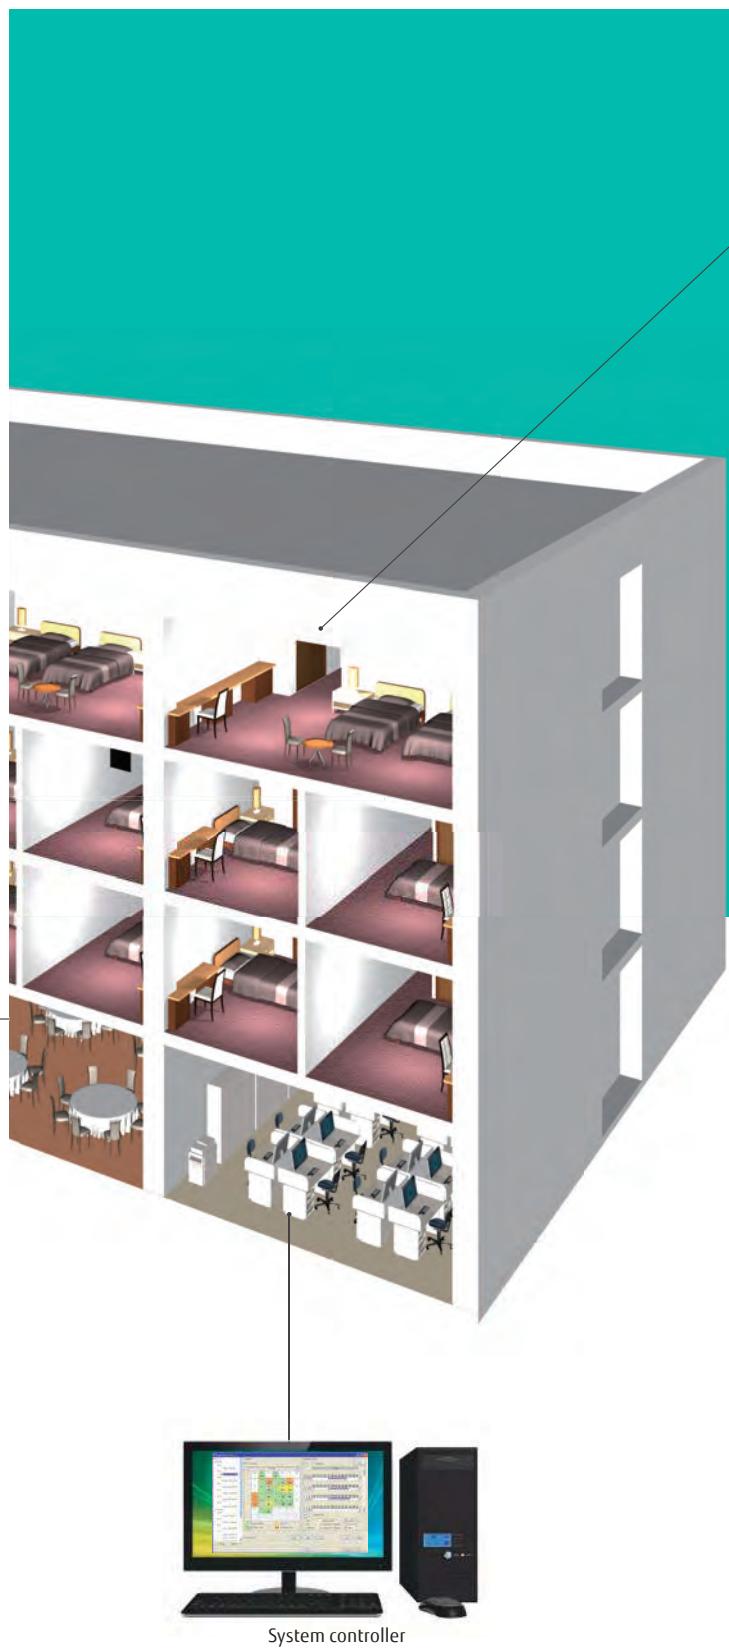

## Centralized control of air conditioning in shared spaces

Air conditioning in shared spaces such as lobbies and hallways is controlled centrally. Temperature and operating conditions can be managed without the adjustment by guests.



208 Page

## Guest room air conditioning with excellent comfort, energy saving and easy installation

**Space saving**  
Mini duct type with 198 mm height and 450 mm depth. This can be installed in narrow ceiling space easily.



Mini Duct  
176 Page



**Card key switch available**  
Using the card key prevents you from forgetting to switch off the air conditioner.



Use of an external connect switch

219 Page

**Comfortable airflow that switches up and down air directions**  
The Auto Louver Grille Kit achieves comfortable airflow by adjusting the air direction.



Auto Louver Grille Kit

228 Page



## Simple Remote Controller with sophisticated design

Suitable for hotels or offices as it is easily operated with no complex functions.  
Large LCD screen & simple operation buttons White colored backlight on monitor enable easy operation in dark.

199 Page




SOLUTIONS

# For LIGHT COMMERCIAL SCHOOL

Fujitsu General provides the optimal number of connected indoor units for mid-sized educational institutions. The degree of freedom of the installation location selection is improved with a compact design that minimizes the installation area. Even one outdoor unit can cover the entire school building.

## AIRSTAGE™

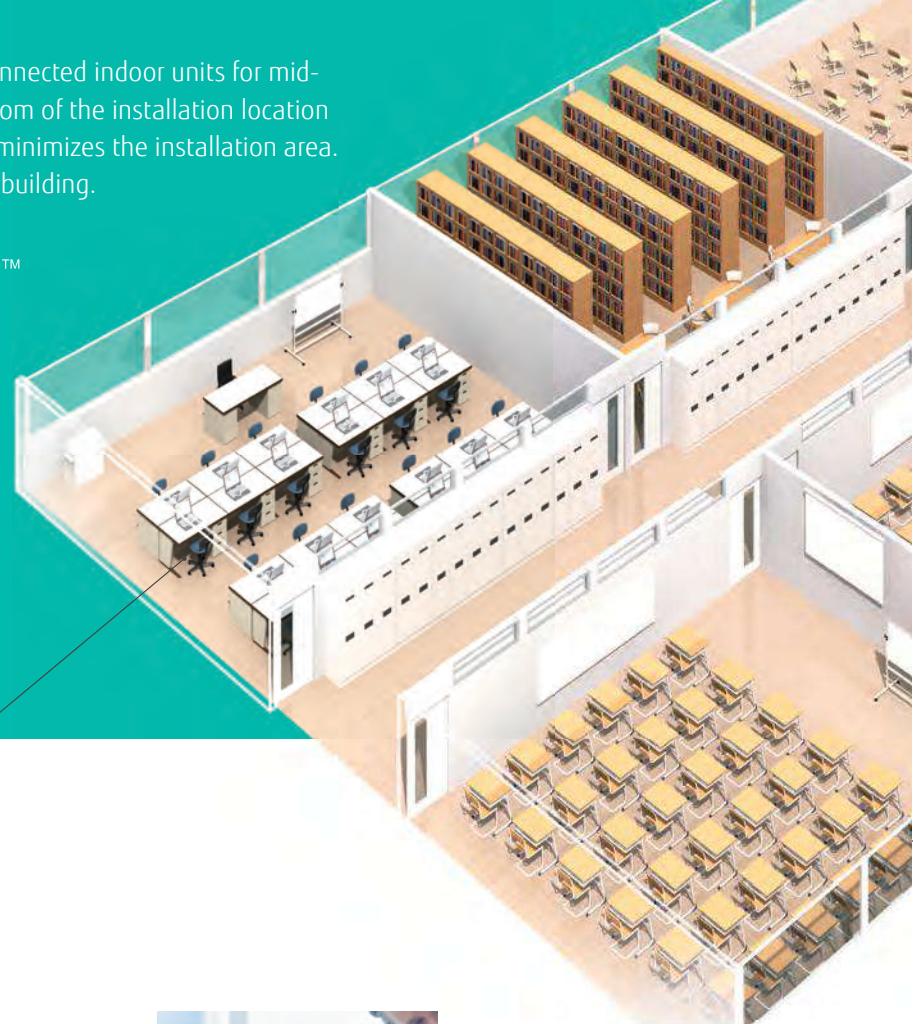

Touch Panel Controller UTy-DTGYZ1

### New centralized remote controller with improved operability

Temperature management of each classroom and one week operation control management/settings are supported easily. This controller makes energy saving management possible with upper/lower temperature limit settings and operation prohibited settings.

204 Page



034



### Control and monitoring

The same management as with the main unit is possible even if you are at your desk. Non-administrators can also operate the air conditioners with a PC, Smartphone or tablet.



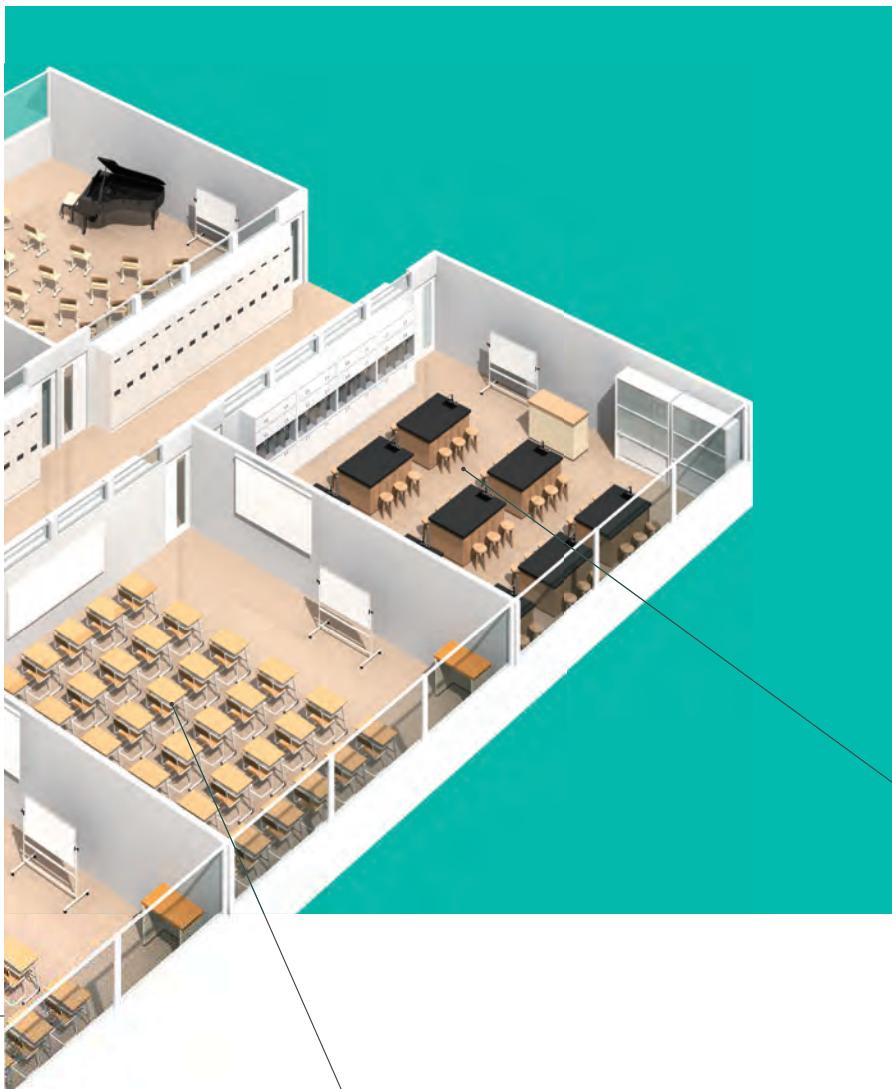

Cassette Circular Flow



Mini Duct



**NEW** Energy Recovery Ventilator

180 Page

## Various indoor units

We have a lineup of indoor units that can also support complex applications – from normal classrooms to special classrooms and auditoriums. Air conditioners can be also added easily.

### Comfortable room air conditioning without airflow feeling


Circular Airflow Cassette  
blows out in all directions  
without temperature  
unevenness



Individual airflow direction control to prevent people from being exposed to airflow



Energy saving operation when there are no people by linking up with human sensor

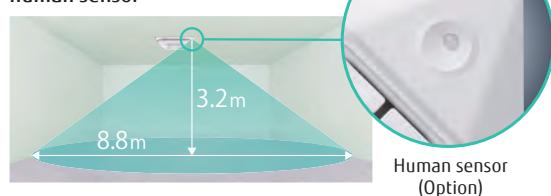

Human sensor (Option)



SOLUTIONS

For COMMERCIAL

# LARGE BUILDING

Fujitsu General provides modular type VRF systems that seek high efficiency, comfort, design freedom, easy installation and reliability for skyscraper buildings.

## AIRSTAGE™



### Abundant lineup suitable to match the operating environment

VRF series lineup to meet various needs such as energy saving-oriented models and models compatible with a high outdoor air temperature of 52°C



#### AIRSTAGE™ VR-II

Smart and cutting edge design. Extensive lineup from 8 HP to 48 HP in 2 HP increment. Connectable indoor unit capacity ratio up to 150%

##### 8 HP - 48 HP 34 Models

- Space saving combination: 8 HP to 48 HP/21 models
- Energy efficiency combination: 16 HP to 44 HP/13 models

140 Page ~

#### Individual air conditioning system for large buildings

Capacities can be expanded up to simultaneous cooling and heating with maximum 48HP. Large individual air conditioning is supported.



#### AIRSTAGE™ V-III


#### AIRSTAGE™ V-III



##### 8 HP - 54 HP 39 Models

- Space saving combination: 8 HP to 54 HP/24 models
- Energy efficiency combination: 16 HP to 46 HP/ 15 models

140 Page ~



## High system flexibility

Flexible installation on each floor and installation of diverse indoor units are possible through the industry's top class high static pressure, long piping design and connection capacity.




**82 Pa**

\*: For V-III series.  
VR-II series are  
80 Pa


## Centralized control

Not only indoor units in the building but also facilities such as ventilation can be controlled easily by anyone.

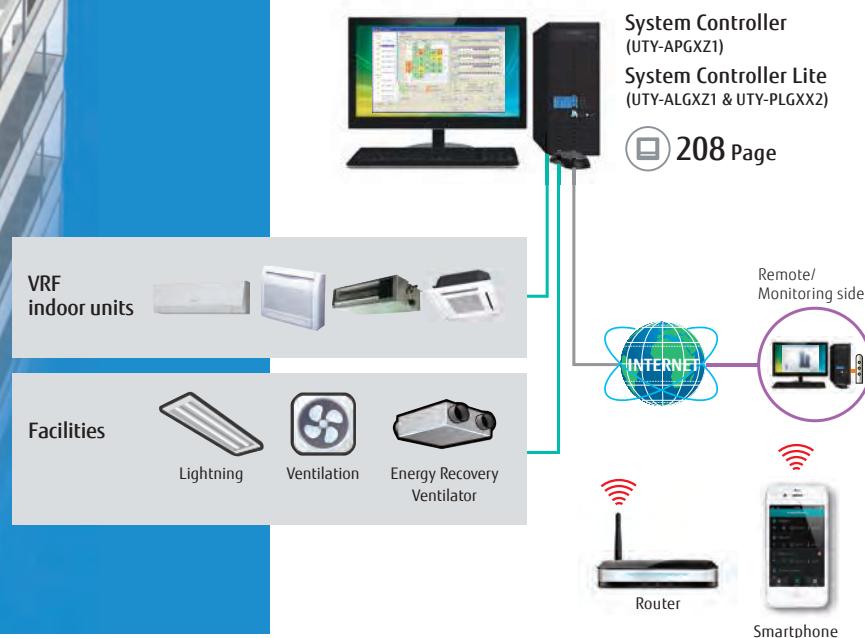


## Link up with a variety of BMS

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, BACnet, KNX and other various interfaces.

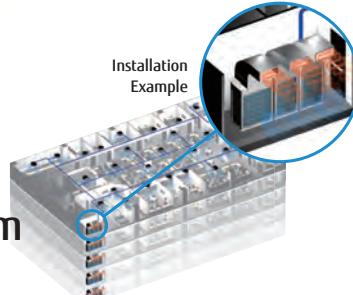

## Rapid service support

The air conditioning of the entire building can be monitored remotely with Web Monitoring Tool and System Controller. Rapid response for emergency is possible by a self-diagnosis in advance in cooperation with a management company.

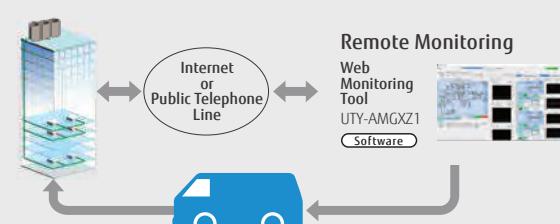




# For RESIDENTIAL RESIDENCE

For APARTMENT & HOUSE

Fujitsu General provides the products that match spaces and the rhythm of life from living rooms where the whole family relaxes to small rooms such as bedrooms and children's rooms.

For APARTMENT

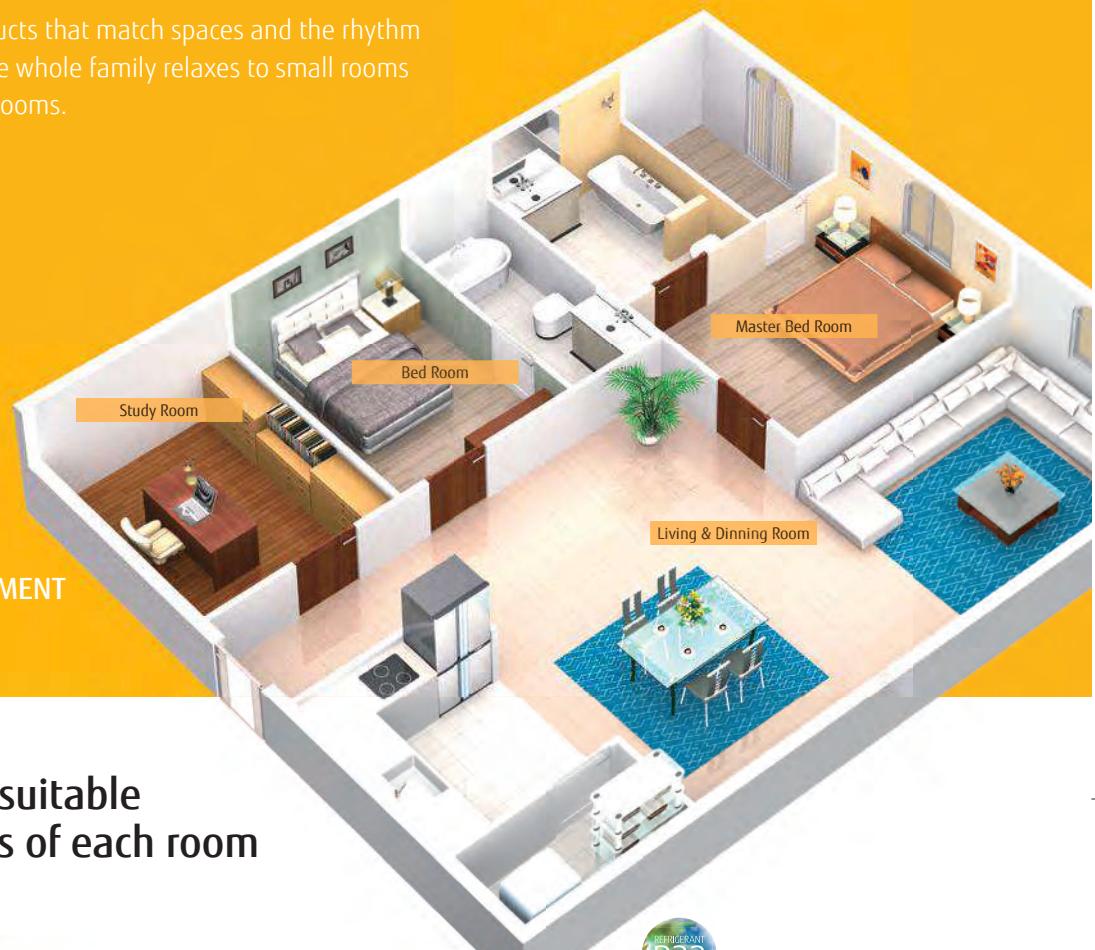

**Various indoor units suitable for the characteristics of each room**



**For Large Living Room & Dining Room**

**Advanced Airflow Model**

Comfortable in every corner even in large living rooms and unusually shaped rooms



056 Page



**For Master Bed Room or Living Room**  
**Good Design & Silent Model**

High performance and low noise model with an emphasis on its design

058 Page



**For Bed Room or Home Office**


**Standard & ECO Range Series**

High performance and compact design model for compact spaces such as bed room or home office.

060 ~ 063 Page



The new environmentally friendly R32 refrigerant is adopted actively.



## Outdoor units suitable for residential environments



### Easy Installation

Installation with an emphasis on the interior is possible without overly lowering the ceiling.

082 Page



### For Small Space


Flexible installation is possible in bedrooms and rooms where you don't want to hang on the wall.

094 Page



### 2-8 Rooms Multi

Lineup of multi type for air conditioning from 2 rooms to 8 rooms with one outdoor unit in apartments where it is difficult to secure space for the installation of outdoor units.

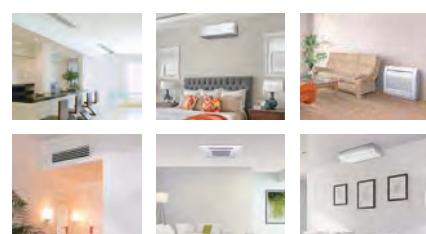



046 Page ~ /100 Page ~



### Central Remote Controller For 5-6 & 8 Rooms Multi

Up to 8 units can be controlled with a residential home controller. Of course, individual control is also possible.

203 Page

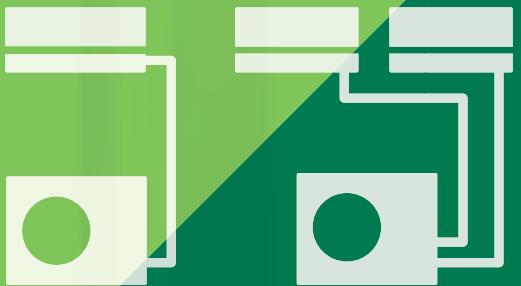


PRODUCT LINEUP

# SPLIT & MULTI SPLIT

For LIGHT COMMERCIAL & RESIDENTIAL





SPLIT

MULTI SPLIT

## Energy saving design to provide a comfortable indoor environment while being environment-friendly.

An air conditioner that is people-friendly is also environment friendly. Fujitsu General offers a broad lineup of products from large living rooms to bedrooms and children's rooms.

- 042 SPLIT OVERVIEW
- 044 SPLIT Indoor Units Lineup
- 046 MULTI SPLIT OVERVIEW
- 048 MULTI SPLIT Outdoor Units Lineup
- 050 CORE TECHNOLOGY
- 055 Feature Explanation



### SPLIT

#### Refrigerant type R32 models

- 056 Wall Mounted Flagship Range Series
- 058 Wall Mounted Designer Range Series
  - High Spec & Design
- 060 Wall Mounted Standard Range Series
  - High Efficiency & Comfort
- 062 Wall Mounted ECO Range Series
  - Comfort for Large Room

#### Refrigerant type R410A models

- 064 Wall Mounted Designer Range Series
  - High Spec & Design
  - High COP
- 068 Wall Mounted Standard Range Series
  - High Efficiency & Comfort
  - Comfort for Large Room
- 074 Wall Mounted ECO Range Series
  - Compact & Comfort
- 076 Compact Cassette 4-way Flow Series
- 078 Cassette Circular Flow Series
- 080 Cassette 4-way Flow Series
- 082 Mini Duct
- 084 Slim Duct
- 086 Medium Static Pressure Duct
- 090 High Static Pressure Duct
- 092 Big Duct
- 094 Floor
- 096 Floor/Ceiling
- 098 Ceiling



### MULTI SPLIT

- 100 2 & 3-4 Rooms Multi
- 102 5-6 Rooms Multi
- 104 8 Rooms Multi
- 106 Simultaneous Multi Twin/Triple
- 108 Simultaneous Multi Twin/Triple/Double Twin
- 110 Connectable Indoor Units - Indoor Units Lineup -
- 112 MULTI SPLIT Indoor Units Specifications
- 114 Multi Combination Table
- 134 Feature Summary





## PRODUCT LINEUP: SPLIT & MULTI SPLIT

# SPLIT OVERVIEW

Fujitsu General provides our customers with 6 types and 86 models air conditioning system ideal for various customer applications and layout.



Flagship Range Series



Designer Range Series



4-way Flow Series



Circular Flow Series



Slim Duct



Medium Static Pressure Duct



High Static Pressure Duct

## Wall Mounted

Installation work is simple and easy for wall mounted type. We have pursued airflow control and energy saving including our dual side fan equipped flagship models. At the same time, their flat and simple designs that match the interior are also attractive. We have a lineup with many models that have adopted the new environmentally friendly R32 refrigerant.



056 Flagship Range Series

**nocria<sup>TM</sup>X**

058 Designer Range Series

060 Standard Range Series

062 ECO Range Series

064 Designer Range Series

068 Standard Range Series

074 ECO Range Series

## Cassette

Cassette type adapts to the interior. This type blows air in four directions to perform the air conditioning of entire spaces evenly. We have a variety of series including Compact models that have adopted a new design panel to match grid ceilings and Circular Flow models that deliver air in 360° directions.

076 Compact 4-way Flow Series

078 Circular Flow Series

080 4-way Flow Series

## Duct

The main unit of this type cannot be seen, so your interior will feel clear. We have Mini Duct and Slim Duct models available to also enable installation in narrow spaces in beams or above the ceiling. For a large model suitable for air conditioning vast spaces, multiple outlets can be installed by only one unit. Therefore, these models are recommended for unusual room layout.

082 Mini Duct

084 Slim Duct

086 Medium Static Pressure Duct

090 High Static Pressure Duct

092 Big Duct

056 Page ~

076 Page ~

082 Page ~



For ceiling installation

## Floor

Floor type with compact and slim design is suitable for installation in both residential and commercial. This model is recommended as heating device because it blows warm airflow from both above and below outlets.



Installation under window is available.

## Floor/Ceiling

Two types of installation method – floor installation and ceiling installation – can be selected. This model has a compact design with a width of 990 mm and a depth of just 199 mm (ceiling installation: height). This means they can handle various installation conditions.



For floor installation

## Ceiling

Installation work is as easy as with wall mounted type. This model can be installed neatly because it has a thin design with a height of 240 mm. It delivers a powerful wind far away from a wide outlet. Therefore, this model is ideal for oblong rooms such as large meeting rooms and audiovisual rooms with depth.

## PRODUCT LINEUP: SPLIT & MULTI SPLIT

### SPLIT Indoor Units Lineup

| Type  | Series   | Refrigerant   | Model   | BTU  |       |             |
|---|--|---|---|--|-------|-------------|
|   |  |   |   | 7  | 9     | 12          |
| Wall<br>Mounted<br><br>Page<br>056~             | Flagship Range Series<br><b>nocria X</b>           |  R32     |    | ASYG--KXCA   |       | ● 09 ● 12   |
|   | Designer Range Series<br>High Spec & Design        |  R32     |    | ASYG--KGTA   | ● 07  | ● 09 ● 12   |
|   | Standard Range Series<br>High Efficiency & Comfort |  R32     |    | ASYG--KMTA <span style="background-color: red; color: white; padding: 2px;">NEW</span> | ● 07* | ● 09* ● 12* |
|   | ECO Range Series<br>Comfort for Large Room         |  R32     |    | ASYG--KLCA <span style="background-color: red; color: white; padding: 2px;">NEW</span> |       |             |
|   | Designer Range Series<br>High Spec & Design        |  R410A |    | ASYG--LTCA   |       | ● 09 ● 12   |
|   | Designer Range Series<br>High COP                  |   |    | ASYG--LUCA   | ● 07  | ● 09 ● 12   |
|   | Standard Range Series<br>High Efficiency & Comfort |   |  | ASYG--LMCE   | ● 07  | ● 09 ● 12   |
|   | Standard Range Series<br>Comfort for Large Room    |   |  | ASYG--LFCA, LFCC   |       |             |
|   | ECO Range Series<br>Compact & Comfort              |   |  | ASYG--LMTA   |       |             |
|   |  |   |  | ASYG--LLCE   | ● 07  | ● 09 ● 12   |
| Cassette<br><br>Page<br>076~                    | Compact 4-way Flow Series<br>Compact & Comfort     |  R410A |  | AUYG--LVLB, LVLA   |       | ● 12LVLB    |
|   | Circular Flow Series<br>Comfort for Large Room     |   |  | AUXG--LRLB   |       |             |
|   | 4-way Flow Series<br>Comfort for Large Room        |   |  | AUYG--LRLE, LRLA   |       |             |
| Duct<br><br>Page<br>082~                        | Mini Duct  |  R410A |  | ARYG--LSAP   |       | ● 12*       |
|   | Slim Duct  |   |  | ARYG--LLTB   |       | ● 12        |
|   | Medium Static Pressure Duct<br>Compact & Comfort   |   |  | ARYG--LHTBP  |       | ● 12        |
|   | Medium Static Pressure Duct<br>Standard            |   |  | ARYG--LMLA, LMEL   |       |             |
|   | High Static Pressure Duct                          |   |  | ARYG--LHTA   |       |             |
|   | Big Duct   |   |  | ARYG--LHTA   |       |             |
| Floor Compact & Comfort<br>Page 094             | R410A  |        | AGYG--LVCA  |  | ● 09  | ● 12        |
| Floor/Ceiling Comfort & Dual Design<br>Page 096 | R410A  |        | ABYG--LVTB, LVTA  |  |       |             |
| Ceiling Comfort for Large Room<br>Page 098      | R410A  |        | ABYG--LRTE, LRTA  |  |       |             |



FUJITSU GENERAL (Euro) GmbH participates in the ECP programme for AIR CONDITIONERS.

Check ongoing validity of certificate:


[www.eurovent-certification.com](http://www.eurovent-certification.com)

\* Models so marked are not ECC certified.

| BTU      |          |          |          |                      |                      |          |          |       |       |
|----------|----------|----------|----------|----------------------|----------------------|----------|----------|-------|-------|
| 14       | 18       | 24       | 30       | 36                   | 45                   | 54       | 60       | 72    | 90    |
| ● 14     |          |          |          |                      |                      |          |          |       |       |
| ● 14*    |          |          |          |                      |                      |          |          |       |       |
|          | ● 18*    |          | ● 24*    |                      |                      |          |          |       |       |
| ● 14     |          |          |          |                      |                      |          |          |       |       |
| ● 14     |          | ● 18LFCA | ● 24LFCC | ● 30LFCA             |                      |          |          |       |       |
|          |          |          |          | ● 30                 | ● 36                 |          |          |       |       |
| ● 14LVLB | ● 18LVLB | ● 24LVLA |          |                      |                      |          |          |       |       |
|          | ● 18     | ● 24     | ● 30     | ● 36                 | ● 45                 | ● 54     |          |       |       |
|          |          |          | ● 30LRLE | ● 36LRLE<br>● 36LRLA | ● 45LRLA             | ● 54LRLA |          |       |       |
| ● 14*    | ● 18*    |          |          |                      |                      |          |          |       |       |
| ● 14     | ● 18     |          |          |                      |                      |          |          |       |       |
| ● 14     | ● 18     | ● 24     | ● 30     | ● 36                 | ● 45                 | ● 54     |          |       |       |
|          |          | ● 24LMLA | ● 30MLE  | ● 36MLE<br>● 36LMLA  | ● 45LMLA             |          |          |       |       |
|          |          |          |          |                      | ● 45                 | ● 54     | ● 60     |       |       |
|          |          |          |          |                      |                      |          |          | ● 72* | ● 90* |
| ● 14     |          | ● 18     | ● 24     |                      |                      |          |          |       |       |
|          |          |          |          | ● 30RTE              | ● 36LRTE<br>● 36LRTA | ● 45LRTA | ● 54LRTA |       |       |

SPLIT

MULTI SPLIT



## PRODUCT LINEUP: SPLIT & MULTI SPLIT

# MULTI SPLIT OVERVIEW

Space-saving multi outdoor units can connect up to 8 indoor units in multiple rooms.

## 2-8 Rooms Multi




2-8 Rooms Multi type is recommended for situations that require air conditioning in multiple rooms such as in family house or offices. It can operate a minimum of 2 units to a maximum of 8 units. and for Central Remote Controller, only one remote controller can control the indoor unit operating schedule of each room and set the energy saving. Due to space - saving outdoor unit enables installation on balcony or under a waist-high window.


## 2 & 3-4 Rooms Multi





## 5-6 Rooms Multi

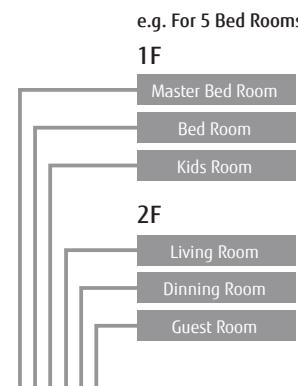

## 8 Rooms Multi

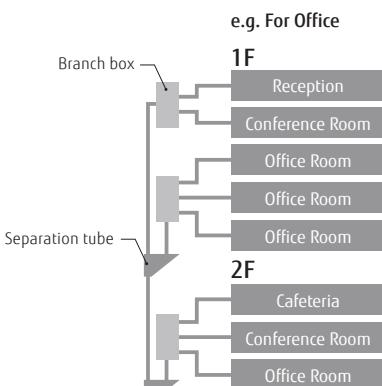

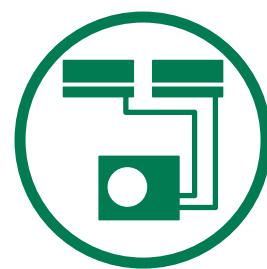

SPLIT

MULTI SPLIT

## Simultaneous Multi



Simultaneous Multi type is recommended for situations where multiple indoor units need to be operated simultaneously such as for small building for small office building entrance, meeting room, educational facility hall, and other large spaces. Up to 4 indoor units can be operated simultaneously. This type is suitable for office spaces with large areas and properties with unusual floor layout.

### Twin/Triple

e.g. For Small Office



### Twin/Triple/Double Twin

e.g. For Entrance Floor



AOYG54LATT






AOYG90LRLA

106 Page

108 Page

## PRODUCT LINEUP: SPLIT & MULTI SPLIT

# MULTI SPLIT Outdoor Units Lineup
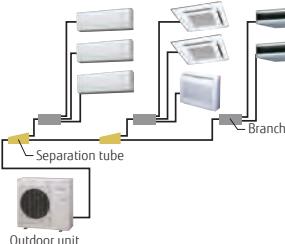
|                                  |                                  |   | Model code | 14          | 18          |              |
|----------------------------------|----------------------------------|---|------------|-------------|-------------|--------------|
|                                  |                                  | Cooling rated capacity(kW)  |            | 4           | 5           | 5.4          |
| 2 & 3-4 Rooms Multi<br>Page 100  | 2 Rooms Multi Up to 2 units      |    |            | AOYG 14LAC2 | AOYG 18LAC2 |              |
|                                  | 3 Rooms Multi Up to 3 units      |    |            |             |             | AOYG 18LAT3* |
|                                  | 4 Rooms Multi Up to 4 units      |    |            |             |             |              |
| 5-6 Rooms Multi<br>Page 102      | 5 Rooms Multi Up to 5 units      |    |            |             |             |              |
|                                  | 6 Rooms Multi Up to 6 units      |    |            |             |             |              |
| 8 Rooms Multi<br>Page 104        | Up to 8 units                    |  |            |             |             |              |
| Simultaneous Multi<br>Page 106 ~ | Twin/Triple Single phase         |  |            |             |             |              |
|                                  | Twin/Triple 3 phase              |  |            |             |             |              |
|                                  | Twin/Triple/ Double Twin 3 phase |  |            |             |             |              |

\* All model refrigerant types are R410A.

Note: **1. 2 Rooms Multi:** Connectable indoor units are 2 units.

AOYG14LAC2: Total capacity of indoor units connected must be between 4.0 kW and 6.0 kW.  
AOYG18LAC2: Total capacity of indoor units connected must be between 4.0 kW and 7.0 kW.

**2. 3 Rooms Multi:** Connectable indoor units are 2 to 3 units.

AOYG18LAT3: Total capacity of indoor units connected must be between 4.0 kW and 8.5 kW.  
AOYG24LAT3: Total capacity of indoor units connected must be between 4.0 kW and 10.5 kW.

**3. 4 Rooms Multi:** Connectable indoor units are 3 to 4 units.

AOYG30LAT4: Total capacity of indoor units connected must be between 7.5 kW and 14.0 kW.

**4. 5 Rooms Multi:** Connectable indoor units are 2 to 5 units

AOYG36LBLA5: Total capacity of indoor units connected must be between 7.5 kW and 15.5 kW.

**5. 6 Rooms Multi:** Connectable indoor units are 2 to 6 units

AOYG45LBLA6 Total capacity of indoor units connected must be between 9.5 kW and 18.0 kW.

**6. 8 Rooms Multi:** Connectable indoor units are 2 to 8 units

AOYG45LB8 Total capacity of indoor units connected must be between 11.0 kW and 18.0 kW.



FUJITSU GENERAL (Euro) GmbH participates in the ECP programme for AIR CONDITIONERS.

Check ongoing validity of certificate:

[www.eurovent-certification.com](http://www.eurovent-certification.com)

\* Models so marked are not ECC certified.

| 24<br>6.8            | 30<br>8              | 36<br>10              | 45<br>12.5            | 54<br>14             | 72<br>19              | 90<br>22            |
|----------------------|----------------------|-----------------------|-----------------------|----------------------|-----------------------|---------------------|
| ●<br>AOYG<br>24LAT3* |                      |                       |                       |                      |                       |                     |
|                      | ●<br>AOYG<br>30LAT4* |                       |                       |                      |                       |                     |
|                      |                      | ●<br>AOYG<br>36LBLA5* |                       |                      |                       |                     |
|                      |                      |                       | ●<br>AOYG<br>45LBLA6* |                      |                       |                     |
|                      |                      |                       |                       | ●<br>AOYG<br>45LBT8* |                       |                     |
|                      |                      | ●<br>AOYG<br>36LBTB   | ●<br>AOYG<br>45LBTB*1 |                      | ●<br>AOYG<br>54LBTB*2 |                     |
|                      |                      | ●<br>AOYG<br>36LATT   | ●<br>AOYG<br>45LATT   |                      | ●<br>AOYG<br>54LATT   |                     |
|                      |                      |                       |                       |                      | ●<br>AOYG<br>72LRLA   | ●<br>AOYG<br>90LRLA |

Cooling rated capacity: \*1: 12.1 kW \*2: 13.3 kW

SPLIT

MULTI SPLIT

# CORE TECHNOLOGY

For SPLIT & MULTI SPLIT

## High Efficiency

### Optimized Inverter Control



#### V-PAM (Vector + I-PAM) inverter control

V-PAM inverter control reduces the effects of magnetic flux and increases the maximum speed and efficiency of the compressor by vector control technology. With this technology, further miniaturization, higher efficiency, and better performance are attained.



#### i-PAM (IPM\*+PAM) inverter control

i-PAM inverter control is a technology which reduces loss by adjusting the current waveform to a better sine waveform. This promotes the effective use of the input power supply to attain high performance.

IPM\*: Intelligent Power Module



### All DC Inverter Technology



#### DC twin rotary compressor


The high efficiency DC inverter type "2-cylinder rotary compressor" is used for our product ranges. It has achieved higher energy efficiency compared with similar compressors by optimizing the structure inside the compressor.

#### DC fan motor

DC fan motor produces high power, wide operation range, and high efficiency.

#### Sine-wave DC inverter control

High efficiency operation is realized by using a sine wave DC inverter control.

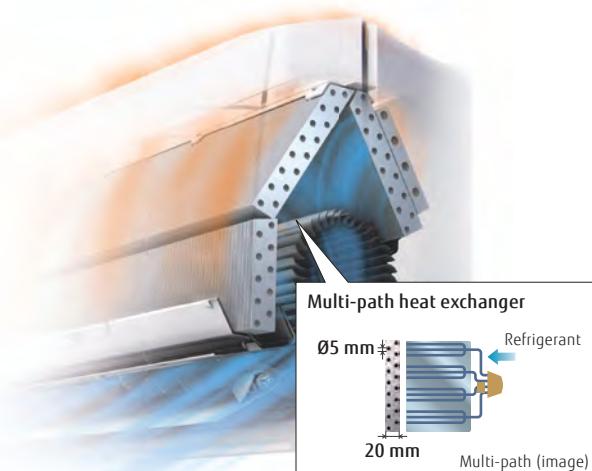

### Heat Exchanger

#### High density multi-path heat exchanger

Heat exchange performance is substantially improved by thin and high-density heat exchanger and multi-path efficiency technology.

#### High performance sub-cool heat exchanger

Higher performance achieved by mounting of counter type bypass circuit. (Large multi type, VRF)




# High Energy Saving



## Human sensor control

Human sensor catches movements of people in a room, and operates with lower capacity when people leave the room.

When people come back to the room, it automatically returns to the previous operating mode.

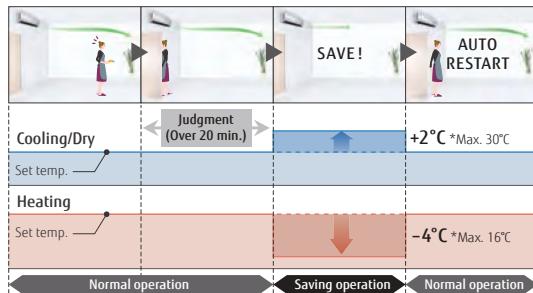


## Economy operation

Limits the maximum operation current, and the power consumption is cut down and the maximum load is suppressed.




## Room temperature set point limitation

The minimum and maximum temperature range can be set giving further energy saving while considering the comfort of the occupants.

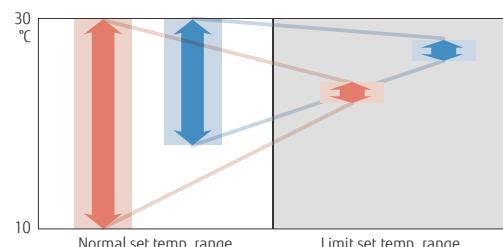


## Set temperature auto return


- The setting temperature automatically returns to the previous setting temperature.
- The time range in which the set temperature can be changed is 10 to 120 minutes.

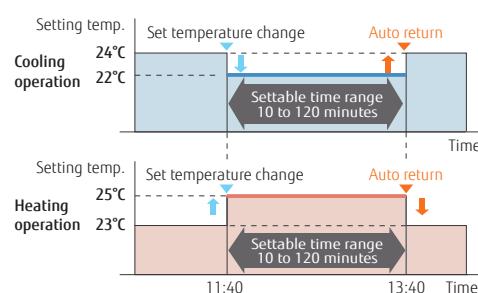

## Auto-off timer

- The indoor unit is turned off automatically when it reaches to the preset operating time frame.
- The time frame of the "Auto off timer" can be flexibly scheduled.
- Off time can be set from 30 to 240 minutes.

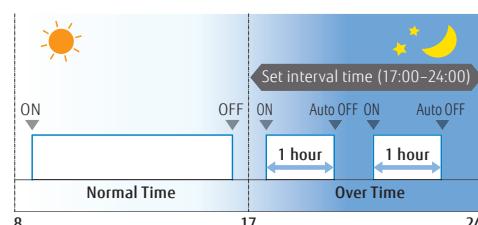



## PRODUCT LINEUP: SPLIT & MULTI SPLIT-CORE TECHNOLOGY

# More Comfort



### Powerful heating


High heating capacity is realized even at low outdoor temperature by mounting a large heat exchanger or large DC rotary compressor and developing high performance inverter PCB






## Power diffuser

Precision wind direction control is realized and ventilation efficiency is also improved by 3 technologies. Our airflow control makes your environment more comfortable.

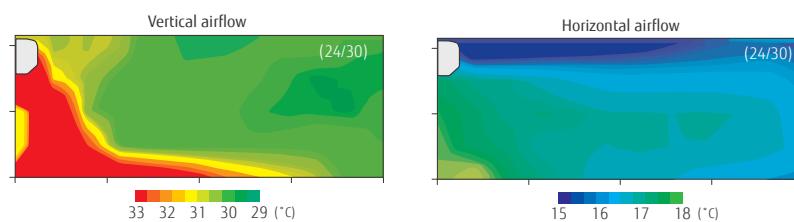


## Powerful operation

Continuous operation by maximum airflow and maximum compressor speed after a certain period of time allows the temperature to reach the setting temp. quickly.

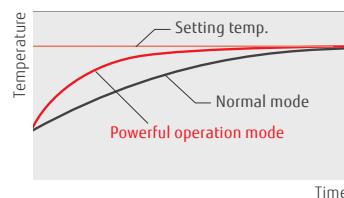


## 10°C Heat operation


When you leave, minimum heating operation is performed to maintain the room temperature. (Maintained at 10°C)

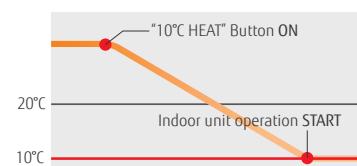

## Uniform air conditioning

Circular airflow to achieve uniform air conditioning without temperature unevenness in workspaces

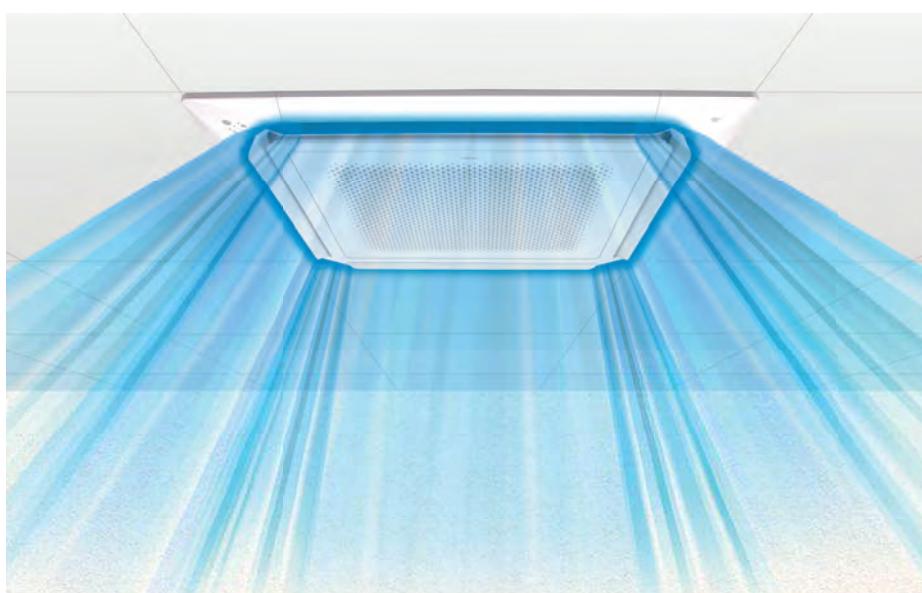



## PRODUCT LINEUP: SPLIT & MULTI SPLIT-CORE TECHNOLOGY




# Quiet and Comfort Control

## Low Noise Technology


### Outdoor unit Fan

Outdoor unit fan design with little separation vortex, fan control to minimize the air volume and top class low noise

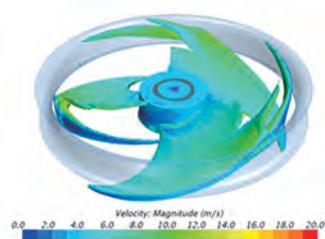


### Air Stabilizer in Duct

Low noise duct structure with a built-in air stabilizer

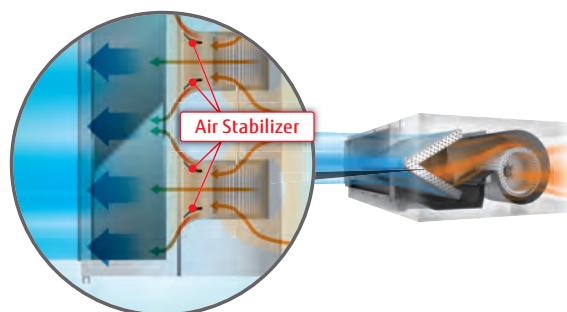


### Outdoor unit low noise operation

Users can choose low noise levels, depending on the installation environment. The operation time can be set using the timer.

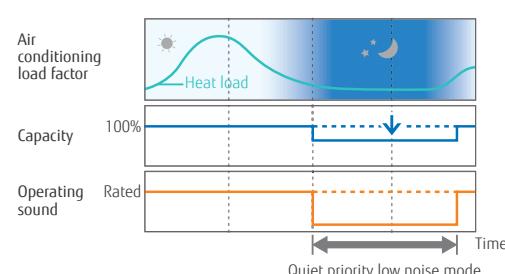

### Auto-changeover function

At Auto setting, the cooling/heating mode is automatically switched according to the set temperature and room temperature.

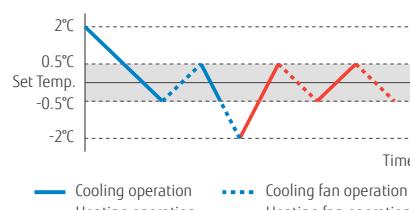

### Fresh air intake

Fresh air can be taken in by a fan which can be connected using external control unit.



Fresh Air Intake kit

# Feature Explanation



SPLIT

MULTI SPLIT

## Energy Saving Function



**Dual side fans**  
The comfortable space can be created with Hybrid Airflow, which combines different temperatures of air current and velocities.



**Economy mode**  
Thermostat setting automatically changes according to the temperature to avoid unnecessary cooling and heating.



**Save human sensor**  
Human sensor detects the movement of people in the room and judges whether the energy saving operation.



**Room temperature set point limitation**  
The minimum and maximum temperature range can be set giving further energy saving while considering the comfort of the occupants.



**Save & Stop human sensor**  
Human sensor (option) detects movement of people in the room and decides whether to save energy or stop the unit.



**Set temperature auto return**  
The setting temperature automatically returns to the previously set temperature.

## Comfortable Function



**Powerful heating**  
Keeping the rated heating capacity even when the outdoor ambient temperature is -7°C.



**Powerful mode**  
Operation at maximum air flow and compressor speed, and quickly makes the room comfortable.



**Auto-changeover**  
The unit automatically switches between heating and cooling modes based on your temperature setting and the room temperature.



**Automatic fan speed**  
The micro-computer automatically adjusts the airflow effectively to follow the changes of room temperature.



**Fresh air intake**  
Fresh air can be taken in by a fan which can be connected using external control unit.



**Power diffuser**  
An additional louver that opens based on monitoring sensors to quickly enhance immediate comfort needs.



**10°C HEAT operation**  
The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.



**Up/down swing flaps**  
The up/down flaps automatically swing up and down.



**Auto restart**  
In the event of a temporary power failure, the air conditioner will automatically restart in the same operating mode as before, once power supply is restored.



**Connectable distributing duct**  
Systems are capable of attaching Locally purchased branch ducts distributing the airflow.



**Server room operation**  
Interlock operation is possible by connecting 2 indoor units even in the low temperature.



**Low noise mode**  
Sound noise level of outdoor unit can be selected.



**Double swing automatic**  
Complex swing action of flaps enables automatically to swing both horizontal and vertical directions.



**Connectable fresh air duct**  
Outside air can be introduced by attaching Locally purchased duct to fresh air knockout and optional part.



**Individual airflow direction control**  
Each louver of 4-way Cassette type can be controlled individually and provides comfortable airflow.

## Convenient Function



**Auto off timer**  
Automatically stops operation when a fixed time has elapsed from the start of operation.



**Weekly timer**  
Different ON-OFF times can be set for each day.



**External error output**



**Sleep timer**  
The micro-computer gradually changes the room temperature automatically to afford a comfortable night's sleep.



**Weekly + setback timer**  
Weekly + Setback timer can set temperature for two times spans and for each day of the week.



**External ON/OFF input**



**Program timer**  
This digital timer allows selection of one of four options: ON, OFF, ON » OFF or OFF » ON.



**Filter sign**  
Indicates the filter cleaning period by lamp.



**Wireless LAN control**  
The exclusive Wi-Fi adaptor enables to operate the air conditioner by smartphone or tablet PC from outside.

## Clean Function



**Plasma air clean**  
The electrostatic precipitator removes dust particles such as pollens and house dust. It is washable and can be always maintained clean.



**Apple-catechin filter**  
The Apple-catechin filter uses static electricity to clean fine particles and dust in the air.



**Filter auto clean**  
The dust collected by the air filter is automatically removed. A routine disposal of the dust stored in the dust box is necessary.



**Long life filter**



**Ion deodorization filter**  
The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by the ultra-fine-particle ceramic.



**Washable panel**  
Since the front panel is easy to remove, maintenance is also easy.

## Installation



**Automatic airflow adjustment**  
Automatically detects required airflow in each application case and adjusts the volume.



**Drain pump as standard**



**Blue fin**




**All DC models**



**i-PAM control models**  
i-PAM inverter control is a technology which reduces loss by adjusting the current waveform to a better sine waveform.



**V-PAM control models**  
V-PAM inverter control reduces the effects of magnetic flux and increases the maximum speed and efficiency of the compressor by vector control technology.



## PRODUCT LINEUP: SPLIT

### Wall Mounted Flagship Range



**nocria™ X**

**ALL  
DC**



#### Comfortable airflow control to prevent the body from being exposed to airflow



The comfortable space can be created with Hybrid Airflow, which combines different temperatures of air current and velocities.



\*1: Announced 2012. In room air conditioner for the home (Our company's investigation)

#### Filter Auto Clean





<sup>\*2</sup> Dust on the filter is automatically removed to prevent power from being wasted by the clogged filter.



\*2: Announced 2002. In room air conditioner for the home (our company's investigation)

#### Plasma Air Clean

Air is cleaned with an electric dust collecting technology. Pollen, house dust and other tiny pollutants are collected and removed with static electricity.

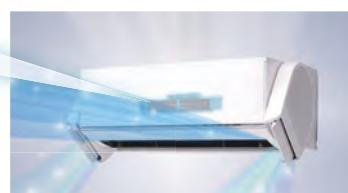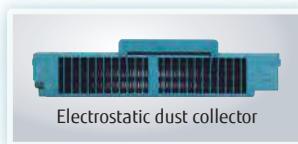

#### Human Sensor

The Human sensor detects movement of people in a room and operates at reduced capacity when people leave the room. When people return to the room, the system automatically returns to the previous room settings.

Rank **A+++** SEER **8.5**<sup>\*3</sup> SCOP **5.1**<sup>\*3</sup>

\*3: All classes



**Model: ASYG09KXCA / ASYG12KXCA**

Wireless R.C.




Wireless LAN Interface

**Specifications**


| Model No.                               | Indoor unit                     |             | ASYG09KXCA    | ASYG12KXCA          |
|---|---------------------------------|-------------|---------------|---------------------|
|   | Outdoor unit                    |             | AOYG09KXCA    | AOYG12KXCA          |
| Power Source                            | Single-phase, ~230V, 50Hz       |             |               |                     |
| Capacity                                | Cooling                         | kW          | 2.5 (0.6-3.5) | 3.4 (0.6-5.3)       |
|   | Heating                         |             | 3.6 (0.6-7.1) | 5.0 (0.6-9.0)       |
| Input Power                             | Cooling/Heating                 | kW          | 0.460/0.630   | 0.670/1.020         |
| EER                                     | Cooling                         |             | 5.45          | 5.09                |
| COP                                     | Heating                         |             | 5.72          | 4.90                |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW          | 2.5/3.4       | 3.4/3.5             |
| SEER                                    | Cooling                         |             | 8.50          | 8.50                |
| SCOP                                    | Heating (Average)               |             | 5.10          | 5.10                |
| Energy Efficiency Class                 | Cooling                         |             | A+++          | A+++                |
|   | Heating (Average)               |             | A+++          | A+++                |
| Max. Operating Current                  | Cooling/Heating                 | A           | 8.5/14.0      | 9.0/16.0            |
| Annual Energy Consumption               | Cooling                         | kWh/a       | 103           | 140                 |
|   | Heating                         |             | 934           | 961                 |
| Moisture Removal                        |                                 | l/h         | 1.1           | 1.2                 |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q     | 46/42/38/28   | 46/42/38/28         |
|   | Indoor (Heating)                | H/M/L/Q     | 48/43/39/30   | 48/43/39/30         |
|   | Outdoor(Cooling/Heating)        | High        | 40/41         | 44/43               |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High        | 58/62         | 58/62               |
|   | Outdoor(Cooling/Heating)        | High        | 53/57         | 57/57               |
| Airflow Rate                            | Indoor / Outdoor (Cooling)      | High        | m³/h          | 670/1,975           |
|   | Indoor / Outdoor (Heating)      | High        |               | 810/1,820           |
| Net Dimensions H x W x D                | Indoor                          |             | mm            | 293×786×378         |
| Weight                                  | Outdoor                         |             | kg(lbs)       | 20 (44)             |
| Connection Pipe Diameter (Liquid / Gas) |                                 |             | mm            | 704×820×315         |
| Drain hose Diameter (I.D./O.D.)         |                                 |             |               | 6.35/9.52           |
| Max Pipe Length (Pre-Charge)            |                                 | m           |               | 13.8 / 15.8 to 16.7 |
| Max Height Difference                   |                                 |             |               | 15 (15)             |
| Operation Range                         | Cooling                         | °CDB        |               | 10                  |
|   | Heating                         |             |               | -10 to 43           |
| Refrigerant                             | Type (Global Warming Potential) |             |               | -15 to 24           |
|   | Charge                          | kg(CO2eq-T) |               | R32 (675)           |
|   |                                 |             |               | 1.30 (0.9)          |

**Dimensions**

(Unit : mm)

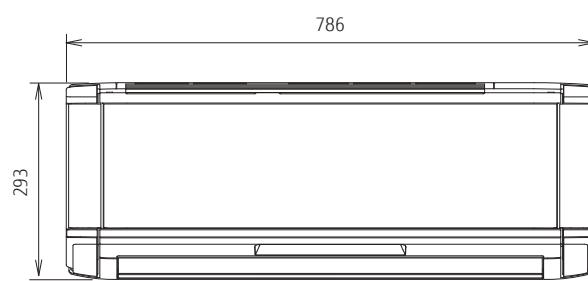

Front view

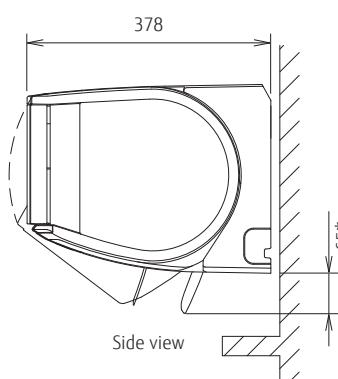

Side view

\*Dimensions in case of air flowing downward



## PRODUCT LINEUP: SPLIT

### Wall Mounted Designer Range

High Spec & Design



**ALL  
DC**




#### High energy saving

Top class high efficiency is achieved by high efficient lambda heat exchanger, large cross flow fan and new refrigerant.




##### Hybrid-heat exchanger

The heat exchange efficiency has been significantly improved with the large hybrid heat exchanger, attaining the top-level SEER and SCOP.

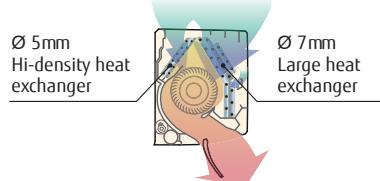


##### Ø107 Large cross-flow fan

With the large-diameter fan, efficient air volume can be obtained at low power.

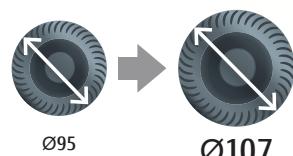

##### Human sensor

Human sensor catches movements of people in a room, and operates with lower capacity when people leave the room. When people come back to the room, it automatically returns to previous operating mode.

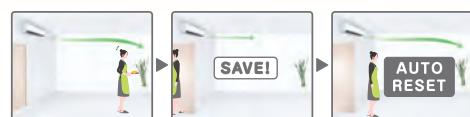

#### Comfortable airflow & Silent operation

The big louver and the new air blowing structure have attained a comfortable air flow that spreads wider to user's feet and silent operation.



**19dB(A)**

(07/09/12)  
Only cooling  
14 model is 20dB(A)


#### Smartphone Control (Option)

Easy air conditioner control from inside or outside the house and office using the Smartphones, Tablets, and PC.



#### Wireless LAN Interface

The exclusive Wi-Fi adaptor enables to operate the air conditioner by smartphone or tablet PC from outside.



## Model: ASYG07KGTA / ASYG09KGTA / ASYG12KGTA / ASYG14KGTA



Wireless R.C.



### Specifications

| Model No.                               | Indoor unit                     |         | ASYG07KGTA  | ASYG09KGTA        | ASYG12KGTA  | ASYG14KGTA  |
|---|---------------------------------|---------|-------------|-------------------|-------------|-------------|
|   | Outdoor unit                    |         | AOYG07KGCA  | AOYG09KGCA        | AOYG12KGCA  | AOYG14KGCA  |
| Power Source                            | Single-phase, ~230V, 50Hz       |         |             |                   |             |             |
| Capacity                                | Cooling                         | kW      | 2.0         | 2.5               | 3.4         | 4.2         |
|   | Heating                         |         | 2.5         | 2.8               | 4.0         | 5.4         |
| Input Power                             | Cooling/Heating                 | kW      | 0.400/0.500 | 0.555/0.560       | 0.805/0.910 | 1.175/1.350 |
| EER                                     | Cooling                         |         | 5.00        | 4.50              | 4.22        | 3.57        |
| COP                                     | Heating                         |         | 5.00        | 5.00              | 4.40        | 4.00        |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW      | 2.0/2.3     | 2.5/2.4           | 3.4/2.5     | 4.2/4.0     |
| SEER                                    | Cooling                         |         | 8.52        | 8.52              | 8.51        | 7.11        |
| SCOP                                    | Heating (Average)               |         | 5.12        | 5.11              | 5.10        | 4.31        |
| Energy Efficiency Class                 | Cooling                         |         | A+++        | A+++              | A+++        | A++         |
|   | Heating (Average)               |         | A+++        | A+++              | A+++        | A+          |
| Max. Operating Current                  | Cooling/Heating                 | A       | 6.5/9.0     | 6.5/9.0           | 6.5/9.0     | 9.0/10.5    |
| Annual Energy Consumption               | Cooling                         |         | 82          | 103               | 140         | 207         |
|   | Heating                         |         | 628         | 658               | 685         | 1298        |
| Moisture Removal                        |                                 | l/h     | 1.0         | 1.3               | 1.8         | 2.1         |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q | 38/33/29/19 | 40/34/29/19       | 40/35/30/19 | 43/36/30/20 |
|   | Indoor (Heating)                | H/M/L/Q | 41/35/31/21 | 42/36/31/21       | 42/38/33/21 | 44/39/33/24 |
|   | Outdoor(Cooling/Heating)        | High    | 46/46       | 46/48             | 50/50       | 50/50       |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High    | 54/56       | 55/57             | 56/58       | 57/59       |
|   | Outdoor(Cooling/Heating)        | High    | 61/62       | 61/63             | 65/66       | 65/66       |
| Airflow Rate                            | Indoor / Outdoor                | High    | m³/h        | 650/1610          | 700/1610    | 700/1680    |
| Net Dimensions H x W x D                | Indoor                          |         | mm          | 270×834×215       |             |             |
| Weight                                  | Outdoor                         |         | kg(lbs)     | 10                |             |             |
|   |                                 |         | mm          | 542×799×290       |             |             |
|   |                                 |         | kg(lbs)     | 30                | 30          | 31          |
| Connection Pipe Diameter (Liquid / Gas) |                                 |         | mm          | 6.35/9.52         |             |             |
| Drain hose Diameter (I.D.O.D.)          |                                 |         | mm          | 13.8/15.8 to 16.7 |             |             |
| Max Pipe Length (Pre-Charge)            |                                 |         | m           | 20 (15)           |             |             |
| Max Height Difference                   |                                 |         |             | 15                |             |             |
| Operation Range                         | Cooling                         | °CDB    |             | -10 to 46         |             |             |
|   | Heating                         |         |             | -15 to 24         |             |             |
| Refrigerant                             | Type (Global Warming Potential) |         |             | R32 (675)         |             |             |
| Charge                                  | kg(CO2eq-T)                     |         | 0.75 (0.5)  | 0.75 (0.5)        | 0.85 (0.6)  | 0.85 (0.6)  |

### Optional parts

Wired Remote Controller: UTY-RNRYZ2, UTY-RLRY

External Input and Output PCB: UTY-XCSXZ2


Communication kit: UTY-TWRXZ2

Wireless LAN Interface: UTY-TFSXW1

External connect kit: UTY-XWZX

### Dimensions

(Unit : mm)

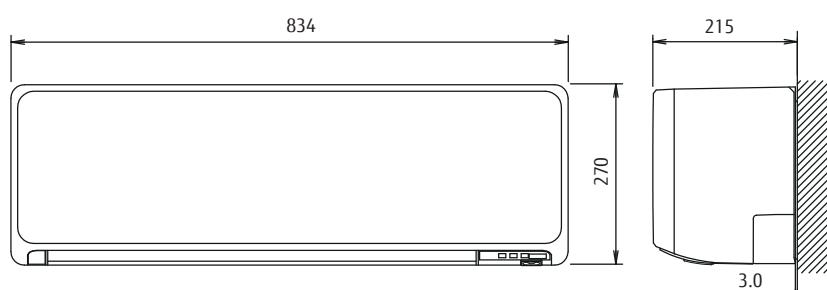



## PRODUCT LINEUP: SPLIT

**Wall Mounted Standard Range**

High Efficiency & Comfort

**NEW**


REFRIGERANT R32

ALL DC

### Slim & stylish square design

Slim and stylish square design is realized by high density multi-path heat exchanger and high efficiency wind blower.

#### Hybrid-heat exchanger

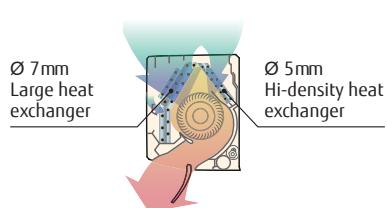

### High energy saving

Top class high efficiency is achieved by high efficient lambda heat exchanger, large cross flow fan and new refrigerant.



SEER 7.3<sup>\*1</sup> SCOP 4.4<sup>\*1</sup>

\*1: 12 class

### Comfortable airflow & Silent operation

The big louver and the new air blowing structure have attained a comfortable air flow that spreads wider to user's feet and silent operation.




20dB(A)  
Only cooling  
14 model is 20dB(A)

### Smartphone Control (Option)

Easy air conditioner control from inside or outside the house and office using the Smartphones, Tablets, and PC.



Wireless LAN Interface  
The exclusive Wi-Fi adaptor enables to operate the air conditioner by smartphone or tablet PC from outside.



## Model: ASYG07KMTA / ASYG09KMTA / ASYG12KMTA / ASYG14KMTA



Wireless R.C.



For ASYG07/09/12KMTA



For ASYG14KMTA

### Specifications

| Model No.                               | Indoor unit                     |             | Tentative     |                   |                   |                   |
|---|---------------------------------|-------------|---------------|-------------------|-------------------|-------------------|
|   | Outdoor unit                    |             | ASYG07KMTA    | ASYG09KMTA        | ASYG12KMTA        | ASYG14KMTA        |
| Power Source                            | Single-phase, ~230V, 50Hz       |             |               |                   |                   |                   |
| Capacity                                | Cooling                         | kW          | 2.0 (0.9-3.0) | 2.5 (0.9-3.2)     | 3.4 (0.9-3.9)     | 4.2 (0.9-4.4)     |
|   | Heating                         |             | 2.5 (0.9-3.4) | 2.8 (0.9-4.0)     | 4.0 (0.9-5.3)     | 5.4 (0.9-6.0)     |
| Input Power                             | Cooling/Heating                 | kW          | 0.450/0.555   | 0.630/0.620       | 0.935/0.960       | 1.220/1.410       |
| EER                                     | Cooling                         |             | 4.43          | 3.97              | 3.65              | 3.44              |
| COP                                     | Heating                         |             | 4.52          | 4.52              | 4.17              | 3.83              |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW          | 2.0/2.3       | 2.5/2.4           | 3.4/2.5           | 4.2/4.0           |
| SEER                                    | Cooling                         |             | 7.40          | 7.40              | 7.30              | 6.90              |
| SCOP                                    | Heating (Average)               |             | 4.10          | 4.10              | 4.40              | 4.10              |
| Energy Efficiency Class                 | Cooling                         |             | A++           | A++               | A++               | A++               |
|   | Heating (Average)               |             | A+            | A+                | A+                | A+                |
| Max. Operating Current                  | Cooling/Heating                 | A           | 6.5/9.0       | 6.5/9.0           | 6.5/9.0           | 6.5/9.0           |
| Annual Energy Consumption               | Cooling                         |             | 97            | 118               | 168               | 213               |
|   | Heating                         |             | 785           | 820               | 813               | 1366              |
| Moisture Removal                        |                                 | l/h         | *             | *                 | *                 | *                 |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q     | 38/33/29/20   | 40/34/29/20       | 40/35/30/20       | 43/36/30/20       |
|   | Indoor (Heating)                | H/M/L/Q     | 41/35/31/22   | 42/36/31/22       | 42/38/33/22       | 44/39/33/24       |
|   | Outdoor(Cooling/Heating)        | High        | 46/46         | 46/46             | 50/50             | 50/50             |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High        | 54/56         | 55/57             | 55/58             | 57/59             |
|   | Outdoor(Cooling/Heating)        | High        | 61/61         | 61/62             | 65/65             | 65/66             |
| Airflow Rate                            | Indoor / Outdoor                | High        | m³/h          | 650/720           | 700/750           | 700/770           |
|   |                                 |             | mm            | 270×834×222       | 270×834×222       | 270×834×222       |
| Net Dimensions H x W x D                | Indoor                          |             | kg(lbs)       | 10                | 10                | 10                |
| Weight                                  | Outdoor                         |             | mm            | 541×663×290       | 541×663×290       | 541×663×290       |
|   |                                 |             | kg(lbs)       | 23                | 23                | 25                |
| Connection Pipe Diameter (Liquid / Gas) |                                 |             | mm            | 6.35/9.52         | 6.35/9.52         | 6.35/9.52         |
| Drain hose Diameter (I.D.O.D.)          |                                 |             | mm            | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7 |
| Max Pipe Length (Pre-Charge)            |                                 |             | m             | 20 (15)           | 20 (15)           | 20 (15)           |
| Max Height Difference                   |                                 |             |               | 15                | 15                | 15                |
| Operation Range                         | Cooling                         | °CDB        |               | -10 to 46         | -10 to 46         | -10 to 46         |
|   | Heating                         |             |               | -15 to 24         | -15 to 24         | -15 to 24         |
| Refrigerant                             | Type (Global Warming Potential) |             |               | R32 (675)         | R32 (675)         | R32 (675)         |
|   | Charge                          | kg(CO2eq-T) |               | 0.6 (0.405)       | 0.6 (0.405)       | 0.7 (0.473)       |
|   |                                 |             |               |                   |                   | 0.85 (0.574)      |

\*:That specification is not fixed yet.

### Optional parts

Wired Remote Controller: UTY-RNNYM, UTY-RVNYM

Simple Remote Controller: UTY-RSNYN



External connect kit: UTY-XWZXZ5


Communication kit: UTY-TWBXF2

Wireless LAN Interface: UTY-TFSXW1

### Dimensions

(Unit : mm)

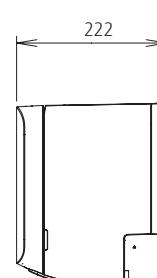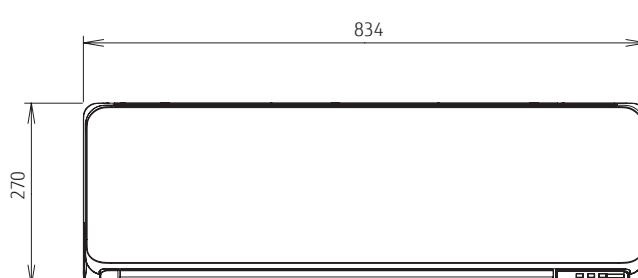



## PRODUCT LINEUP: SPLIT

NEW

# Wall Mounted ECO Range

Comfort for Large Room



**ALL DC**





### Narrow width & Compact Design

Powerful airflow is realized despite 790mm width compact design.


790 mm



H 293mm  
W 790mm  
D 249mm


### ON-OFF Programmable timer

You can set an integrated ON-OFF or OFF-ON timer suitable for your life style. (Setting time: 0.5, 1, 1.5, 2, 2.5, ----9.5, 10, 11, 12 hours)

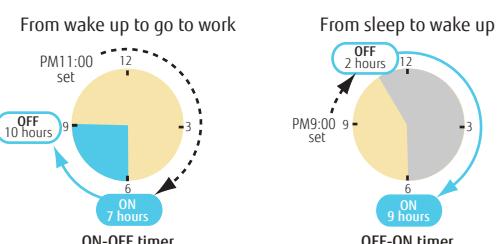


### Powerful operation

20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

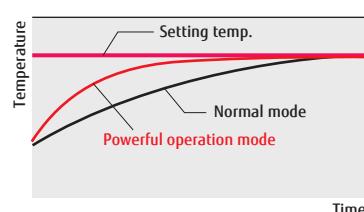


### Economy operation

Setting temp. is shifted by 1°C automatically.

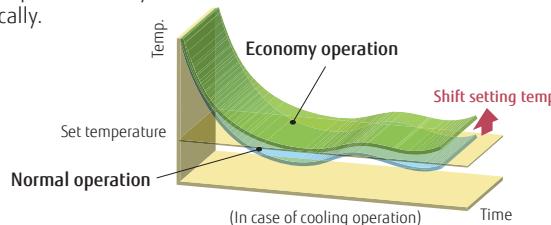

### Low ambient operation

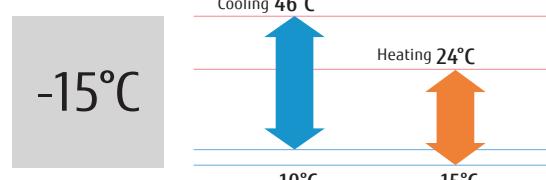

**Model: ASYG18KLCA / ASYG24KLCA**

Wireless R.C.



For ASYG18KLCA



For ASYG24KLCA

**Specifications**



| Model No.                               | Indoor unit                     |                          | Tentative  |                           |
|---|---------------------------------|--------------------------|------------|---------------------------|
|   |                                 |                          | ASYG18KLCA | ASYG24KLCA                |
|   | AOYG18KLTA                      |                          | AOYG24KLTA |                           |
| Power Source                            |                                 |                          |            | Single-phase, ~230V, 50Hz |
| Capacity                                | Cooling                         | kW                       | 5.2 (-)    | 7.1 (-)                   |
|   | Heating                         |                          | 6.3 (-)    | 8.0 (-)                   |
| Input Power                             | Cooling/Heating                 | kW                       | 2.080/-    | 2.700/-                   |
| EER                                     | Cooling                         |                          | 2.65       | 2.65                      |
| COP                                     | Heating                         |                          | 3.38       | 2.97                      |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW                       | *5.0       | 5.0/6.4                   |
| SEER                                    | Cooling                         |                          | 5.10       | 5.10                      |
| SCOP                                    | Heating (Average)               |                          | 3.80       | 3.80                      |
| Energy Efficiency Class                 | Cooling                         |                          | A          | A                         |
|   | Heating (Average)               |                          | A          | A                         |
| Max. Operating Current                  | Cooling/Heating                 | A                        | 9.0/13.0   | 13.0/17.0                 |
| Annual Energy Consumption               | Cooling                         | kWh/a                    | -          | -                         |
|   | Heating                         |                          | -          | -                         |
| Moisture Removal                        |                                 | l/h                      | -          | -                         |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q                  | 48/-/-/-   | 52/-/-/-                  |
|   | Indoor (Heating)                | H/M/L/Q                  | 50/-/-/-   | 51/-/-/-                  |
|   | Outdoor(Cooling/Heating)        | High                     | 50/49      | 53/56                     |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High                     | -          | -                         |
|   | Outdoor(Cooling/Heating)        | High                     | -          | -                         |
| Airflow Rate                            | Indoor / Outdoor                | High                     | m³/h       | -                         |
|   |                                 |                          | mm         | 293×790×249               |
| Net Dimensions H x W x D                | Indoor                          |                          | kg(lbs)    | 9.5                       |
| Weight                                  | Outdoor                         |                          | mm         | 542×799×290               |
|   |                                 |                          | kg(lbs)    | 32                        |
| Connection Pipe Diameter (Liquid / Gas) |                                 |                          | mm         | 6.35/9.52                 |
| Drain hose Diameter (I.D.O.D.)          |                                 |                          |            | -                         |
| Max Pipe Length (Pre-Charge)            |                                 | m                        | 25 (15)    | 30 (15)                   |
| Max Height Difference                   |                                 |                          | 20         | 25                        |
| Operation Range                         | Cooling                         | °CDB                     | -10 to 46  | -10 to 46                 |
|   | Heating                         |                          | -15 to 24  | -15 to 24                 |
| Refrigerant                             | Type (Global Warming Potential) |                          | R32(675)   | R32(675)                  |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) | 0.85(0.57) | 1.10(0.74)                |

**Optional parts**

Remote Controller Holder: UTZ-RXLA

**Dimensions**

(Unit : mm)

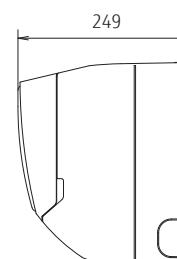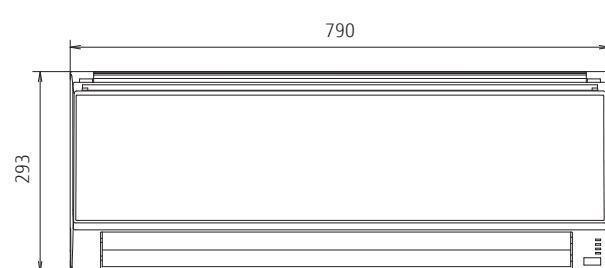



## PRODUCT LINEUP: SPLIT

**Wall Mounted Designer Range**


High Spec & Design

ALL DC i-PAM

Save Economy Heating Powerful HEAT 10°C Low Noise Auto Changeover Up/Down Adjust R Sleep Program Weekly Filter ION AF

### Thin & Slim design

Thin and slim design is realized by high density multi-path heat exchanger and high efficiency wind blower.

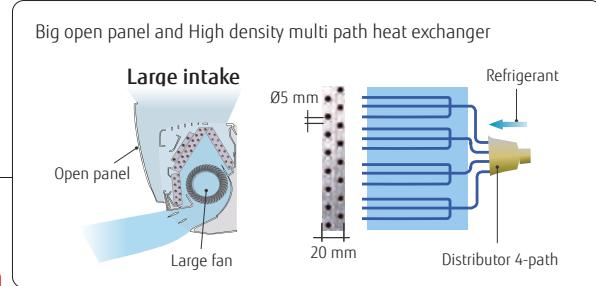


### Human sensor

Human sensor catches movements of people in a room, and operates with lower capacity when people leave the room. When people come back to the room, it automatically returns to previous operating mode.



### Powerful heating

Rated heating capacity is maintained up to an outdoor temperature lower than -7 °C. This new model can operate even at -20 °C low outdoor temperature.

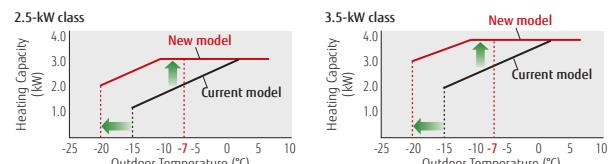


### 3 Mode timer (Weekly/Program/Sleep)

Weekly timer can be easily set by wireless remote controller. ON, OFF can be set up to 4 times in 1 day and up to 28 times in 1 week. For other modes, program timer and sleep timer can be also selected by one push.



### Low ambient operation

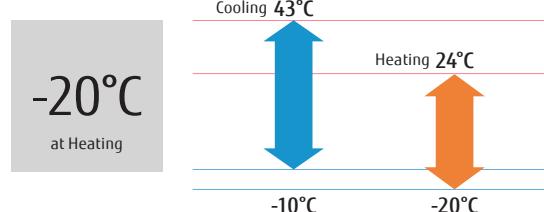

**Model: ASYG09LTCA / ASYG12LTCA**

Wireless R.C.



For ASYG09LTCA



For ASYG12LTCA

**Specifications**

| Model No.                               | Indoor unit                     |             | ASYG09LTCA    | ASYG12LTCA        |
|---|---------------------------------|-------------|---------------|-------------------|
|   | Outdoor unit                    |             | AOYG09LTC     | AOYG12LTC         |
| Power Source                            | Single-phase, ~230V, 50Hz       |             |               |                   |
| Capacity                                | Cooling                         | kW          | 2.5 (0.9-3.5) | 3.5 (1.1-4.0)     |
|   | Heating                         |             | 3.2 (0.9-5.4) | 4.0 (0.9-6.5)     |
| Input Power                             | Cooling/Heating                 | kW          | 0.505/0.660   | 0.850/0.910       |
| EER                                     | Cooling                         |             | 4.95          | 4.12              |
| COP                                     | Heating                         |             | 4.85          | 4.40              |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW          | 2.5/3.0       | 3.5/4.0           |
| SEER                                    | Cooling                         |             | 8.50          | 8.50              |
| SCOP                                    | Heating (Average)               |             | 4.60          | 4.60              |
| Energy Efficiency Class                 | Cooling                         |             | A+++          | A+++              |
|   | Heating (Average)               |             | A++           | A++               |
| Max. Operating Current                  | Cooling/Heating                 | A           | 6.5/9.0       | 9.0/10.5          |
| Annual Energy Consumption               | Cooling                         | kWh/a       | 103           | 144               |
|   | Heating                         |             | 912           | 1217              |
| Moisture Removal                        |                                 | l/h         | 1.3           | 1.8               |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q     | 42/36/32/21   | 43/37/32/21       |
|   | Indoor (Heating)                | H/M/L/Q     | 42/37/32/21   | 43/38/32/21       |
|   | Outdoor(Cooling/Heating)        | High        | 48/50         | 48/49             |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High        | 59/61         | 60/62             |
|   | Outdoor(Cooling/Heating)        | High        | 63/65         | 64/65             |
| Airflow Rate                            | Indoor / Outdoor                | High        | m³/h          | 800/1,700         |
|   |                                 |             | mm            | 282×870×185       |
| Net Dimensions H x W x D                | Indoor                          |             | kg(lbs)       | 9.5 (21)          |
| Weight                                  | Outdoor                         |             | mm            | 540×790×290       |
|   |                                 |             | kg(lbs)       | 33 (73)           |
| Connection Pipe Diameter (Liquid / Gas) |                                 |             | mm            | 6.35/9.52         |
| Drain hose Diameter (I.D.O.D.)          |                                 |             |               | 13.8/15.8 to 16.7 |
| Max Pipe Length (Pre-Charge)            |                                 | m           |               | 20 (15)           |
| Max Height Difference                   |                                 |             |               | 15                |
| Operation Range                         | Cooling                         | °CDB        |               | -10 to 43         |
|   | Heating                         |             |               | -20 to 24         |
| Refrigerant                             | Type (Global Warming Potential) |             |               | R410A (2,088)     |
|   | Charge                          | kg(CO2eq-T) |               | 1.05 (2.2)        |
|   |                                 |             |               | 1.20 (2.5)        |

**Optional parts**

Wired Remote Controller: UTY-RNNYM / UTY-RVNYM


Simple Remote Controller: UTY-RSNYM


Communication kit: UTY-TWBXF1

Wireless LAN Interface: UTY-TFNXZ1

**Dimensions**

(Unit : mm)

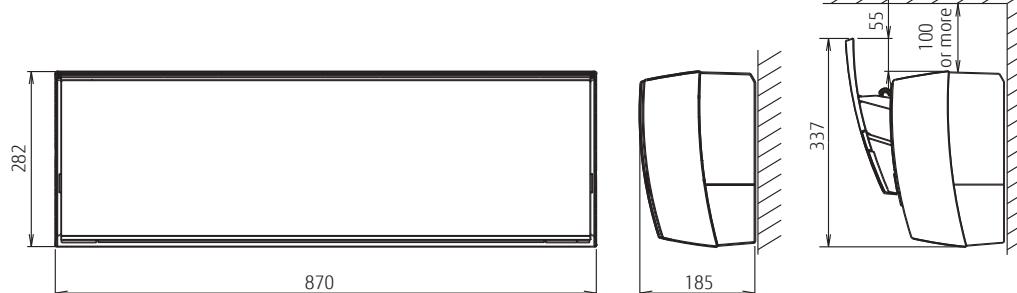



## PRODUCT LINEUP: SPLIT

# Wall Mounted

## Designer Range

High COP




ALL DC i-PAM

Economy Powerful HEAT 10°C Low Noise Changover Up/Down Adjust R Sleep P W Filter ION AF


### Thin & Slim design

Thin and slim design is realized by Ø5 mm heat exchanger and high efficiency wind blower.

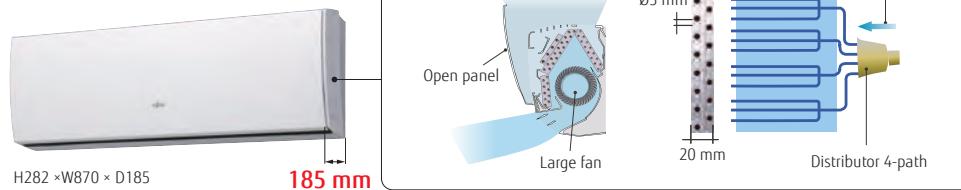

### Powerful operation

20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

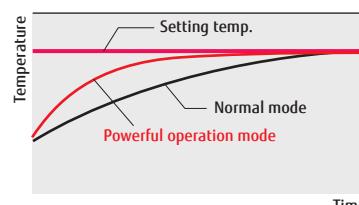


### 3 Mode timer (Weekly/Program/Sleep)

Weekly timer can be easily set by wireless remote controller. ON, OFF can be set up to 4 times in 1 day and up to 28 times in 1 week. For other modes, program timer and sleep timer can be also selected by one push.




### 10°C HEAT Operation

The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied. \*Only available with Wireless RC.

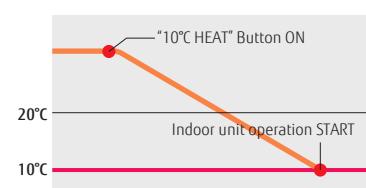

### Low ambient operation

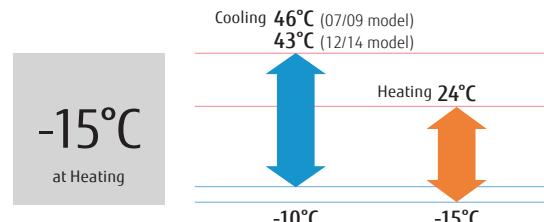

**Model: ASYG07LUCA / ASYG09LUCA / ASYG12LUCA / ASYG14LUCA**

Wireless R.C.



For ASYG07/09LUCA



For ASYG12/14LUCA

**Specifications**

| Model No.                               | Indoor unit                     |                          | ASYG07LUCA        | ASYG09LUCA        | ASYG12LUCA        | ASYG14LUCA                |
|---|---------------------------------|--------------------------|-------------------|-------------------|-------------------|---------------------------|
|   | Outdoor unit                    |                          | AOYG07LUCA        | AOYG09LUCB        | AOYG12LUC         | AOYG14LUC                 |
| Power Source                            |                                 |                          |                   |                   |                   | Single-phase, ~230V, 50Hz |
| Capacity                                | Cooling                         | kW                       | 2.0 (0.5-3.0)     | 2.5 (0.9-4.0)     | 3.5 (0.9-5.0)     | 4.2 (0.9-5.0)             |
|   | Heating                         |                          | 3.0 (0.5-4.0)     | 3.2 (0.5-4.2)     | 4.0 (0.9-5.6)     | 5.4 (0.9-6.0)             |
| Input Power                             | Cooling/Heating                 | kW                       | 0.460/0.740       | 0.555/0.680       | 0.905/0.930       | 1.235/1.380               |
| EER                                     | Cooling                         |                          | 4.35              | 4.50              | 3.87              | 3.40                      |
| COP                                     | Heating                         |                          | 4.05              | 4.71              | 4.30              | 3.91                      |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW                       | 2.0/2.6           | 2.5/2.8           | 3.5/3.9           | 4.2/4.8                   |
| SEER                                    | Cooling                         |                          | 7.20              | 7.10              | 7.05              | 6.78                      |
| SCOP                                    | Heating (Average)               |                          | 4.02              | 4.10              | 4.00              | 4.00                      |
| Energy Efficiency Class                 | Cooling                         |                          | A++               | A++               | A++               | A++                       |
|   | Heating (Average)               |                          | A+                | A+                | A+                | A+                        |
| Max. Operating Current                  | Cooling/Heating                 | A                        | 6.0/7.5           | 6.0/7.5           | 6.5/9.0           | 9.0/10.5                  |
| Annual Energy Consumption               | Cooling                         |                          | 97                | 123               | 174               | 217                       |
|   | Heating                         |                          | 887               | 956               | 1363              | 1677                      |
| Moisture Removal                        |                                 | l/h                      | 1.0               | 1.3               | 1.8               | 2.1                       |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q                  | 38/35/31/21       | 42/36/32/21       | 43/37/32/21       | 45/40/33/25               |
|   | Indoor (Heating)                | H/M/L/Q                  | 38/35/31/21       | 42/37/32/21       | 43/38/32/21       | 45/40/34/27               |
|   | Outdoor(Cooling/Heating)        | High                     | 46/46             | 48/48             | 50/50             | 50/50                     |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High                     | 57/59             | 59/61             | 60/62             | 60/64                     |
|   | Outdoor(Cooling/Heating)        | High                     | 58/58             | 60/60             | 65/65             | 65/65                     |
| Airflow Rate                            | Indoor / Outdoor                | High                     | 680/1,720         | 800/1,720         | 850/1,940         | 900/1,940                 |
|   |                                 | mm                       | 282×870×185       | 282×870×185       | 282×870×185       | 282×870×185               |
| Net Dimensions H x W x D                | Indoor                          | kg(lbs)                  | 9.5 (21)          | 9.5 (21)          | 9.5 (21)          | 9.5 (21)                  |
|   |                                 | mm                       | 540×660×290       | 540×660×290       | 540×790×290       | 540×790×290               |
|   | Outdoor                         | kg(lbs)                  | 23 (51)           | 25 (55)           | 33 (73)           | 34 (75)                   |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm                       | 6.35/9.52         | 6.35/9.52         | 6.35/9.52         | 6.35/12.7                 |
| Drain hose Diameter (I.D./O.D.)         |                                 | mm                       | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7         |
| Max Pipe Length (Pre-Charge)            |                                 | m                        | 20 (15)           | 20 (15)           | 20 (15)           | 20 (15)                   |
| Max Height Difference                   |                                 |                          | 15                | 15                | 15                | 15                        |
| Operation Range                         | Cooling                         | °CDB                     | -10 to 46         | -10 to 46         | -10 to 43         | -10 to 43                 |
|   | Heating                         |                          | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24                 |
| Refrigerant                             | Type (Global Warming Potential) |                          | R410A (2,088)     | R410A (2,088)     | R410A (2,088)     | R410A (2,088)             |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) | 0.70 (1.5)        | 0.85 (1.8)        | 1.05 (2.2)        | 1.05 (2.2)                |

**Optional parts**

Wired Remote Controller: UTY-RNNYM, UTY-RVNYM



Simple Remote Controller: UTY-RSNYM


Communication kit: UTY-TWBXF1

Wireless LAN Interface: UTY-TFNXZ1

**Dimensions**

(Unit : mm)

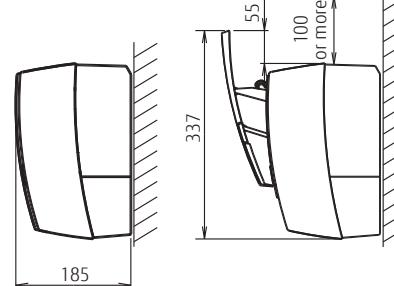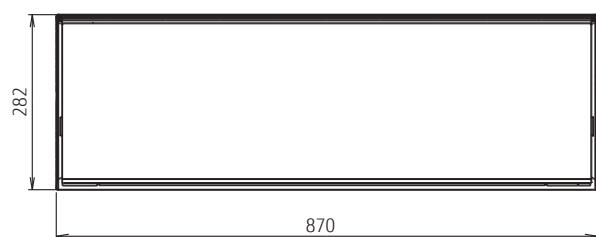




## PRODUCT LINEUP: SPLIT

### Wall Mounted Standard Range


High Efficiency & Comfort



#### High efficient compact design

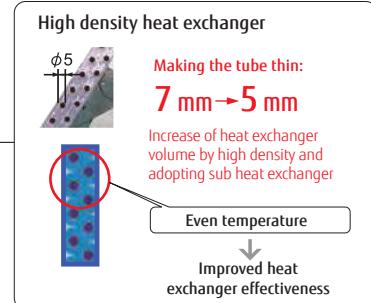

#### More comfort airflow

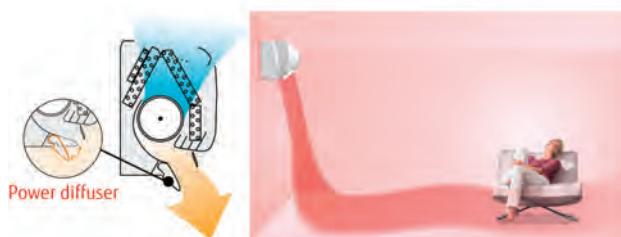


Vertical airflow provides powerful floor level heating



Horizontal airflow does not blow cool air directly at the occupants in the room.


#### Powerful operation

20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

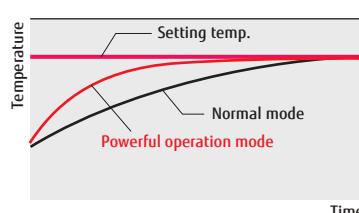

#### Low noise mode for outdoor unit

Low noise mode of outdoor unit can be selected by wireless remote controller.

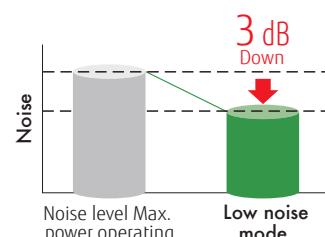

**Model: ASYG07LMCE / ASYG09LMCE / ASYG12LMCE / ASYG14LMCE**



Wireless R.C.



For ASYG07/09/12LMCE



For ASYG14LMCE

### Specifications

| Model No.                               | Indoor unit                     |                          | ASYG07LMCE   | ASYG09LMCE        | ASYG12LMCE        | ASYG14LMCE        |
|---|---------------------------------|--------------------------|--------------|-------------------|-------------------|-------------------|
|   | Outdoor unit                    |                          | AOYG07LMCE   | AOYG09LMCE        | AOYG12LMCE        | AOYG14LMCE        |
| <b>Power Source</b>                     |                                 |                          |              |                   |                   |                   |
| Capacity                                | Cooling                         | kW                       | 2.0(0.5-3.0) | 2.5(0.5-3.2)      | 3.4(0.9-3.9)      | 4.0(0.9-4.4)      |
|   | Heating                         |                          | 3.0(0.5-3.4) | 3.2(0.5-4.0)      | 4.0(0.9-5.3)      | 5.0(0.9-6.0)      |
| Input Power                             | Cooling/Heating                 | kW                       | 0.465/0.685  | 0.65/0.73         | 0.97/1.02         | 1.135/1.365       |
| EER                                     | Cooling                         |                          | 4.30         | 3.85              | 3.50              | 3.52              |
| COP                                     | Heating                         |                          | 4.38         | 4.38              | 3.92              | 3.66              |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW                       | 2.0/2.3      | 2.5/2.4           | 3.4/3.5           | 4.0/3.9           |
| SEER                                    | Cooling                         |                          | 6.80         | 7.00              | 7.00              | 6.90              |
| SCOP                                    | Heating (Average)               |                          | 4.10         | 4.10              | 4.00              | 4.00              |
| Energy Efficiency Class                 | Cooling                         |                          | A++          | A++               | A++               | A++               |
|   | Heating (Average)               |                          | A+           | A+                | A+                | A+                |
| Max. Operating Current                  | Cooling/Heating                 | A                        | 6.0/7.5      | 6.0/7.5           | 6.5/9.0           | 9.0/10.5          |
| Annual Energy Consumption               | Cooling                         | kWh/a                    | 103          | 125               | 170               | 203               |
|   | Heating                         |                          | 786          | 820               | 1225              | 1365              |
| Moisture Removal                        |                                 | l/h                      | 1.0          | 1.3               | 1.8               | 2.1               |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q                  | 43/40/32/21  | 43/40/32/21       | 43/40/32/21       | 44/40/33/25       |
|   | Indoor (Heating)                | H/M/L/Q                  | 43/38/33/22  | 43/38/33/22       | 43/38/33/22       | 44/40/35/27       |
|   | Outdoor(Cooling/Heating)        | High                     | 45/45        | 45/45             | 50/50             | 50/50             |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High                     | 59/59        | 59/59             | 59/59             | 60/60             |
|   | Outdoor(Cooling/Heating)        | High                     | 58/56        | 58/56             | 61/61             | 65/65             |
| Airflow Rate                            | Indoor / Outdoor                | High                     | m³/h         | 750/1670          | 750/1670          | 750/1830          |
|   |                                 |                          | mm           | 270×870×204       | 270×870×204       | 270×870×204       |
| Net Dimensions H x W x D                | Indoor                          |                          | kg(lbs)      | 8.5(19)           | 8.5(19)           | 8.5(19)           |
| Weight                                  | Outdoor                         |                          | mm           | 535×663×293       | 535×663×293       | 540×790×290       |
|   |                                 |                          | kg(lbs)      | 21(46)            | 21(46)            | 34(75)            |
| Connection Pipe Diameter (Liquid / Gas) |                                 |                          | mm           | 6.35/9.52         | 6.35/9.52         | 6.35/9.52         |
| Drain hose Diameter (I.D./O.D.)         |                                 |                          | mm           | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7 |
| Max Pipe Length (Pre-Charge)            |                                 |                          | m            | 20(15)            | 20(15)            | 20(15)            |
| Max Height Difference                   |                                 |                          |              | 15                | 15                | 15                |
| Operation Range                         | Cooling                         | °CDB                     |              | -10 to 43         | -10 to 43         | -10 to 43         |
|   | Heating                         |                          |              | -15 to 24         | -15 to 24         | -15 to 24         |
| Refrigerant                             | Type (Global Warming Potential) |                          | R410A(2,088) | R410A(2,088)      | R410A(2,088)      | R410A(2,088)      |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) | 0.70 (1.5)   | 0.70 (1.5)        | 0.85 (1.8)        | 1.05 (2.2)        |

### Optional parts

Wired Remote Controller: UTY-RNNYM, UTY-RVNYM

Simple Remote Controller: UTY-RSNYM



Communication kit: UTY-XCBXZ2


Wireless LAN Interface: UTY-TFNXZ1

External Connect kit: UTY-XWZXZ5

### Dimensions

(Unit : mm)

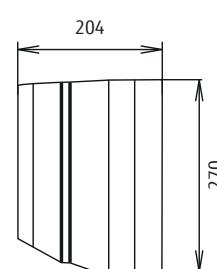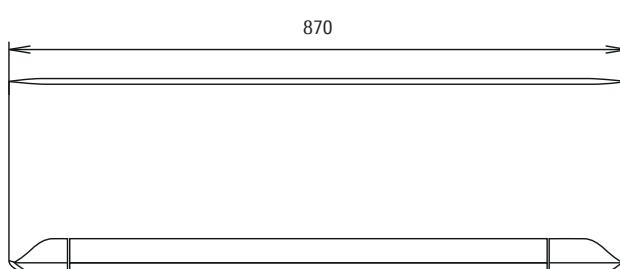



## PRODUCT LINEUP: SPLIT

**Wall Mounted Standard Range**

Comfort for Large Room




(18/30) (24)

**ALL DC** **i-PAM** **V-PAM**




The image shows a white split-system air conditioner mounted on a light-colored wall with a decorative pattern. A remote control is placed on a surface in front of the unit. Below the remote, there is a row of icons representing various features and modes.

**"Vertical airflow" provides powerful floor level heating**

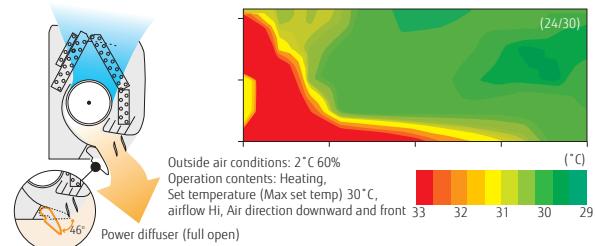

**"Horizontal airflow" does not blow cool air directly at the occupants in the room**

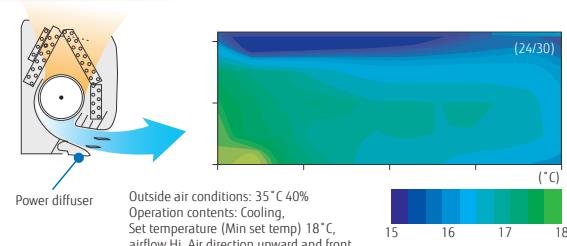

### Air conditioner filter features

Using different filters at both sides




**Ion Deodorization Filter**

The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by the ultra-fine-particle ceramic.



**Apple-catechin Filter**

The Apple-catechin filter uses static electricity to clean fine particles and dust in the air.

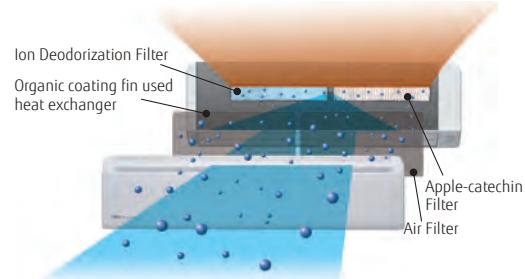


### Flexible Installation

|                    | 18 type | 24 type | 30 type |
|--------------------|---------|---------|---------|
| Max. Piping Length | 25 m    | 30 m    | 50 m    |
| Max. Height        | 20 m    | 20 m    | 30 m    |

### Low ambient operation

-15°C  
at Heating

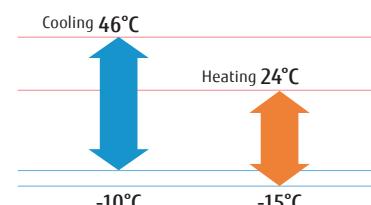

**Model: ASYG18LFCA / ASYG24LFCC / ASYG30LFCA**

Wireless R.C.

For ASYG18LFCA,  
ASYG24LFCC

For ASYG30LFCA

**Specifications**

| Model No.                               | Indoor unit                     |             | ASYG18LFCA    | ASYG24LFCC     | ASYG30LFCA     |
|---|---------------------------------|-------------|---------------|----------------|----------------|
|   | Outdoor unit                    |             | AOYG18LFC     | AOYG24LFC      | AOYG30LFT      |
| Power Source                            | Single-phase, ~230V, 50Hz       |             |               |                |                |
| Capacity                                | Cooling                         | kW          | 5.2 (0.9-6.0) | 7.1 (0.9-8.0)  | 8.0 (2.9-9.0)  |
|   | Heating                         |             | 6.3 (0.9-9.1) | 8.0 (0.9-10.6) | 8.8 (2.2-11.0) |
| Input Power                             | Cooling/Heating                 | kW          | 1.52/1.71     | 2.20/2.21      | 2.49/2.44      |
| EER                                     | Cooling                         |             | 3.42          | 3.23           | 3.21           |
| COP                                     | Heating                         |             | 3.68          | 3.61           | 3.61           |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW          | 5.2/5.9       | 7.1/7.1        | 8.0/8.0        |
| SEER                                    | Cooling                         |             | 6.94          | 6.11           | 5.69           |
| SCOP                                    | Heating (Average)               |             | 3.87          | 3.80           | 3.80           |
| Energy Efficiency Class                 | Cooling                         |             | A++           | A++            | A+             |
|   | Heating (Average)               |             | A             | A              | A              |
| Max. Operating Current                  | Cooling/Heating                 | A           | 9.0/12.5      | 13.5/18.5      | 17.0/19.0      |
| Annual Energy Consumption               | Cooling                         |             | 262           | 406            | 492            |
|   | Heating                         |             | 2130          | 2610           | 2941           |
| Moisture Removal                        |                                 | l/h         | 2.6           | 2.7            | 3.2            |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q     | 43/37/33/26   | 49/42/37/32    | 48/42/37/33    |
|   | Indoor (Heating)                | H/M/L/Q     | 42/37/33/25   | 48/42/37/32    | 49/42/37/33    |
|   | Outdoor(Cooling/Heating)        | High        | 50/51         | 55/56          | 53/56          |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High        | 58/58         | 64/64          | 64/64          |
|   | Outdoor(Cooling/Heating)        | High        | 65/-          | 68/-           | 68/-           |
| Airflow Rate                            | Indoor / Outdoor                | High        | 900/2150      | 1120/2460      | 1100/3600      |
| Net Dimensions H x W x D                | Indoor                          | mm          | 320×998×238   | 320×998×238    | 320×998×238    |
| Weight                                  | Outdoor                         | kg(lbs)     | 14 (31)       | 14 (31)        | 14 (31)        |
|   |                                 | mm          | 620×790×290   | 620×790×290    | 830×900×330    |
|   |                                 | kg(lbs)     | 41 (90)       | 41 (90)        | 61 (135)       |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm          | 6.35/12.7     | 6.35/15.88     | 9.52/15.88     |
| Drain hose Diameter (I.D.O.D.)          |                                 | mm          | 12/16         | 12/16          | 12/16          |
| Max Pipe Length (Pre-Charge)            |                                 | m           | 25 (15)       | 30 (15)        | 50 (20)        |
| Max Height Difference                   |                                 |             | 20            | 20             | 30             |
| Operation Range                         | Cooling                         | °CDB        | -10 to 46     | -10 to 46      | -10 to 46      |
|   | Heating                         |             | -15 to 24     | -15 to 24      | -15 to 24      |
| Refrigerant                             | Type (Global Warming Potential) |             | R410A (2,088) | R410A (2,088)  | R410A (2,088)  |
|   | Charge                          | kg(CO2eq-T) | 1.20 (2.5)    | 1.80 (3.8)     | 2.1 (4.4)      |

**Optional parts**



Wired Remote Controller: UTY-RNNYM, UTY-RVNYM

Simple Remote Controller: UTY-RSNYM


Wireless LAN Interface: UTY-TFNXZ1

**Dimensions**


(Unit : mm)

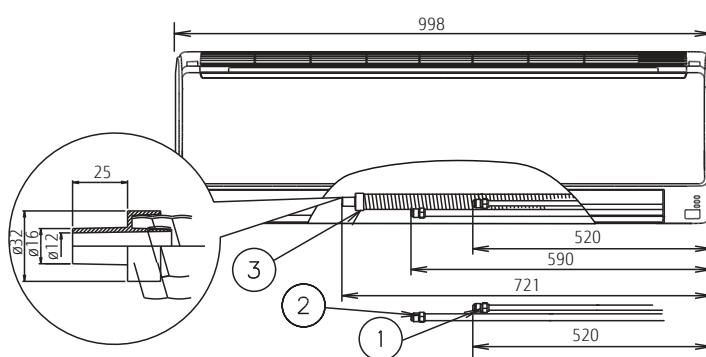

① Refrigerant pipe flare connection (Liquid)  
 ② Refrigerant pipe flare connection (Gas)  
 ③ Drain hose connection (Drain hose)



## PRODUCT LINEUP: SPLIT

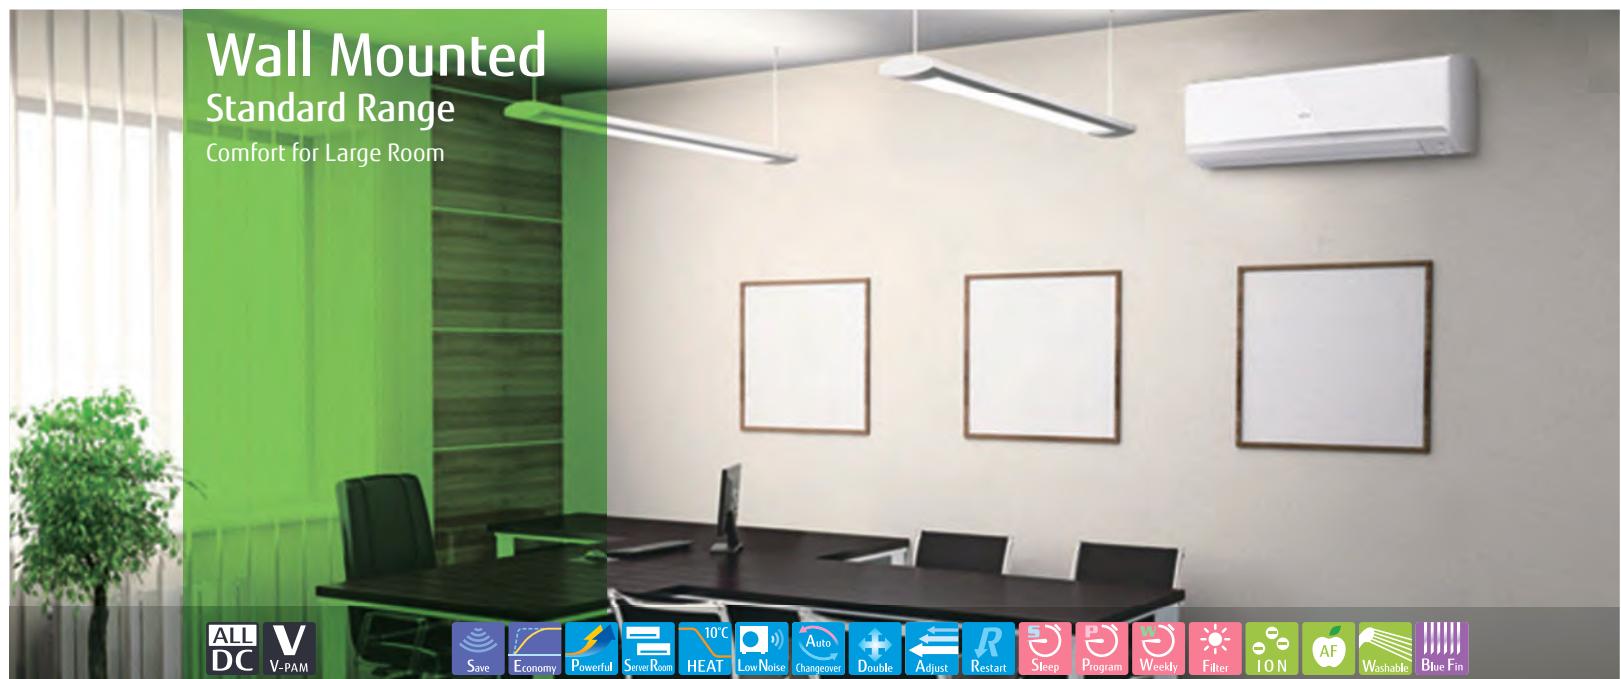

### Large Capacity & Powerful airflow

Achieved large capacity and powerful airflow by large heat exchanger, long cross-flow fan, high output DC fan motor and new airflow structure design.



### Human sensor

Human sensor catches movements of people in a room, and operates with lower capacity when people leave the room. When people come back to the room, it automatically returns to previous operating mode.




### Server room function\*


The following interlock operation is possible by connecting 2 indoor units with a cable. Cooling operation can be performed even in the low outdoor temperature and low humidity environment.

- **Alternative operation:** Two units operate alternately
- **Backup operation:** When 1 unit breaks down, the other unit starts operating automatically.
- **Supporting operation:** Both units operate simultaneously when the loaded capacity is not enough with one unit

\*2 x UTY-XWNX of optional parts are required.

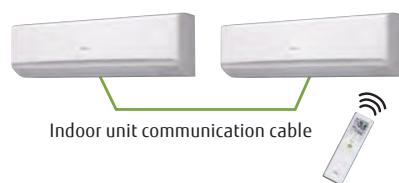



### High seasonal energy efficiency

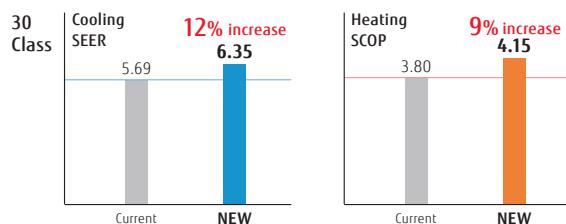

072

### Low ambient operation

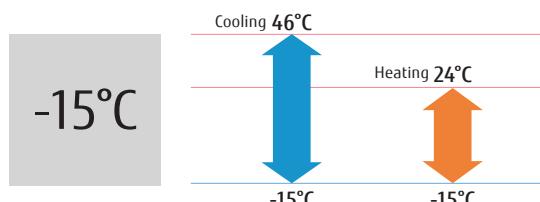



## Model: ASYG30LMTA / ASYG36LMTA



Wireless R.C.



### Specifications


| Model No.                               | Indoor unit                     |             | ASYG30LMTA     | ASYG36LMTA          |
|---|---------------------------------|-------------|----------------|---------------------|
|   | Outdoor unit                    |             | AOYG30LMTA     | AOYG36LMTA          |
| Power Source                            | Single-phase, ~230V, 50Hz       |             |                |                     |
| Capacity                                | Cooling                         | kW          | 8.0 (2.9-9.0)  | 9.4 (2.9-10.0)      |
|   | Heating                         |             | 8.8 (2.2-11.0) | 10.1 (2.7-11.2)     |
| Input Power                             | Cooling/Heating                 | kW          | 2.33/2.41      | 3.16/2.96           |
| EER                                     | Cooling                         |             | 3.43           | 2.97                |
| COP                                     | Heating                         |             | 3.65           | 3.41                |
| Pdesign                                 | Cooling/Heating (-10°C)         | kW          | 8.0/6.5        | 9.4/7.1             |
| SEER                                    | Cooling                         |             | 6.35           | 5.73                |
| SCOP                                    | Heating (Average)               |             | 4.15           | 4.19                |
| Energy Efficiency Class                 | Cooling                         |             | A++            | A+                  |
|   | Heating (Average)               |             | A+             | A+                  |
| Max. Operating Current                  | Cooling/Heating                 | A           | 14.5/14.5      | 19.0/19.0           |
| Annual Energy Consumption               | Cooling                         | kWh/a       | 441            | 575                 |
|   | Heating                         |             | 2,193          | 2,373               |
| Moisture Removal                        |                                 | l/h         | 2.7            | 3.7                 |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q     | 50/44/38/31    | 50/44/38/31         |
|   | Indoor (Heating)                | H/M/L/Q     | 49/44/39/31    | 49/44/39/31         |
|   | Outdoor(Cooling/Heating)        | High        | 52/55          | 55/56               |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High        | 65/65          | 65/65               |
|   | Outdoor(Cooling/Heating)        | High        | 67/68          | 68/70               |
| Airflow Rate                            | Indoor / Outdoor                | High        | m³/h           | 1380/3600           |
|   |                                 |             | mm             | 340×1150×280        |
| Net Dimensions H x W x D                | Indoor                          |             | kg(lbs)        | 18 (40)             |
| Weight                                  | Outdoor                         |             | mm             | 830×900×330         |
|   |                                 |             | kg(lbs)        | 61 (134)            |
| Connection Pipe Diameter (Liquid / Gas) |                                 |             | mm             | 9.52/15.88          |
| Drain hose Diameter (I.D.O.D.)          |                                 |             |                | 13.8 / 15.8 to 16.7 |
| Max Pipe Length (Pre-Charge)            |                                 |             | m              | 50 (20)             |
| Max Height Difference                   |                                 |             |                | 30                  |
| Operation Range                         | Cooling                         | °CDB        |                | -15 to 46           |
|   | Heating                         |             |                | -15 to 24           |
| Refrigerant                             | Type (Global Warming Potential) |             | R410A (2,088)  | R410A (2,088)       |
|   | Charge                          | kg(CO2eq-T) |                | 2.10 (4.4)          |


### Optional parts

- Wired Remote Controller: UTY-RNRYZ2, UTY-RVNYM, UTY-RLRY, UTY-RNNYM  
 Simple Remote Controller: UTY-RSRY, UTY-RSNYM, UTY-RSRY  
 Communication kit: UTY-TWRX, UTY-XWNX  
 External input and output PCB (with box): UTY-XCSXZ1 + UTZ-GXXB  
 Wireless LAN Interface: UTY-TFNXZ1  
 External Connect Kit: UTY-XWZX

### Dimensions

(Unit : mm)

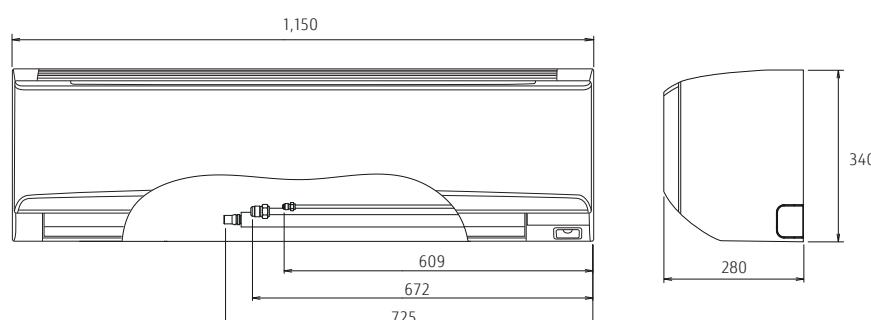



## PRODUCT LINEUP: SPLIT



### Wall Mounted ECO Range

Compact & Comfort

ALL DC i-PAM




#### High efficient compact design

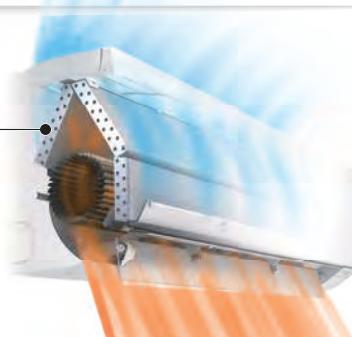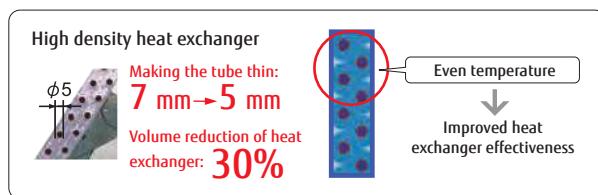


#### ON-OFF Programmable timer

You can set an integrated ON-OFF or OFF-ON timer suitable for your life style. (Setting time: 0.5, 1, 1.5, 2, 2.5, ----9.5, 10, 11, 12 hours)

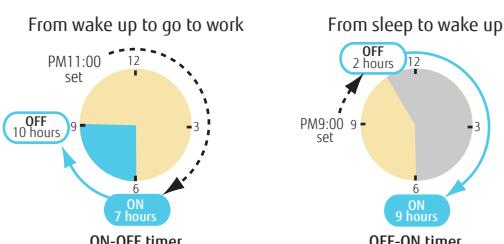


#### Powerful operation

20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

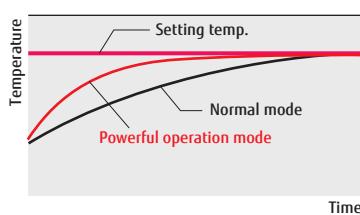


#### Economy operation

Setting temp. is shifted by 1°C automatically.

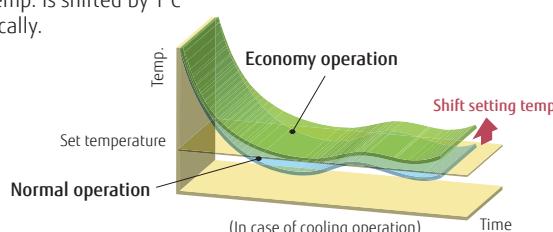

#### Low ambient operation

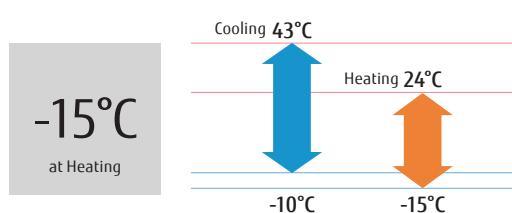

**Model: ASYG07LLCE / ASYG09LLCE / ASYG12LLCE**

Wireless R.C.

**Specifications**


| Model No.                               | Indoor unit                     |                          | ASYG07LLCE        | ASYG09LLCE        | ASYG12LLCE        |
|---|---------------------------------|--------------------------|-------------------|-------------------|-------------------|
|   | Outdoor unit                    |                          | AOYG07LLCE        | AOYG09LLCE        | AOYG12LLCE        |
| Power Source                            | Single-phase, ~230V, 50Hz       |                          |                   |                   |                   |
| Capacity                                | Cooling                         | kW                       | 2.0(0.9-2.8)      | 2.5(0.9-3.0)      | 3.4(0.9-3.8)      |
|   | Heating                         |                          | 2.7(0.9-3.6)      | 3.0(0.9-3.8)      | 4.0(0.9-5.0)      |
| Input Power                             | Cooling/Heating                 | kW                       | 0.470/0.620       | 0.730-0.740       | 1.080/1.130       |
| EER                                     | Cooling                         | W/W                      | 4.26              | 3.42              | 3.15              |
| COP                                     | Heating                         |                          | 4.35              | 4.05              | 3.54              |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW                       | 2.0/2.2           | 2.5/2.3           | 3.4/3.2           |
| SEER                                    | Cooling                         | W/W                      | 6.70              | 6.90              | 6.60              |
| SCOP                                    | Heating (Average)               |                          | 4.00              | 4.00              | 3.80              |
| Energy Efficiency Class                 | Cooling                         |                          | A++               | A++               | A++               |
|   | Heating (Average)               |                          | A+                | A+                | A                 |
| Max. Operating Current                  | Cooling/Heating                 | A                        | 6.0/7.5           | 6.0/7.5           | 6.5/9.0           |
| Annual Energy Consumption               | Cooling                         | kWh/a                    | 104               | 127               | 180               |
|   | Heating                         |                          | 770               | 805               | 1,179             |
| Moisture Removal                        |                                 | l/h                      | 1.0               | 1.3               | 1.8               |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q                  | 43/38/33/22       | 43/38/33/22       | 43/38/33/22       |
|   | Indoor (Heating)                | H/M/L/Q                  | 43/38/33/22       | 43/38/33/22       | 43/38/33/22       |
| Sound Power Level                       | Outdoor(Cooling/Heating)        | High                     | 47/48             | 47/48             | 50/51             |
|   | Indoor(Cooling/Heating)         | High                     | 59/60             | 59/60             | 59/60             |
| Airflow Rate                            | Outdoor(Cooling/Heating)        | High                     | 61/61             | 61/61             | 65/65             |
|   | Indoor / Outdoor                | High                     | 720/1,670         | 720/1,670         | 720/1,830         |
| Net Dimensions H x W x D                | Indoor                          | mm                       | 262×820×206       | 262×820×206       | 262×820×206       |
|   |                                 | kg(lbs)                  | 7.0(15)           | 7.0(15)           | 7.0(15)           |
| Weight                                  | Outdoor                         | mm                       | 535×663×293       | 535×663×293       | 535×663×293       |
|   |                                 | kg(lbs)                  | 24(53)            | 24(53)            | 26(57)            |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm                       | 6.35/9.52         | 6.35/9.52         | 6.35/9.52         |
| Drain hose Diameter (I.D./O.D.)         |                                 | mm                       | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7 |
| Max Pipe Length (Pre-Charge)            |                                 | m                        | 20(15)            | 20(15)            | 20(15)            |
| Max Height Difference                   |                                 |                          | 15                | 15                | 15                |
| Operation Range                         | Cooling                         | °CDB                     | -10 to 43         | -10 to 43         | -10 to 43         |
|   | Heating                         |                          | -15 to 24         | -15 to 24         | -15 to 24         |
| Refrigerant                             | Type (Global Warming Potential) |                          | R410A(2,088)      | R410A(2,088)      | R410A(2,088)      |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) | 0.65(1.4)         | 0.65(1.4)         | 0.85(1.8)         |


**Optional parts**

Remote Controller Holder: UTZ-RXLA

**Dimensions**

(Unit : mm)

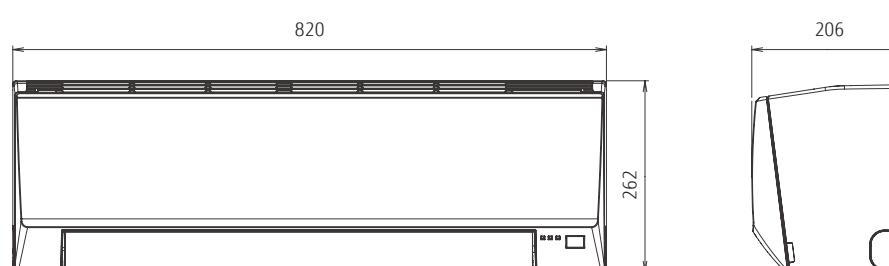




## PRODUCT LINEUP: SPLIT



### 2-stage turbo fan


High efficiency design by 2 stage structure

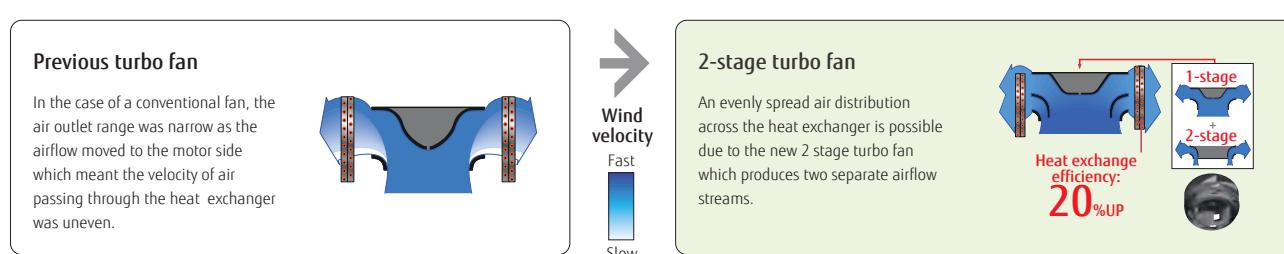


### Quiet quality

Optimized wing form (laminar wing type) and wing number (7 blades each)


Designed by CFD-analysis (fluid) simulations

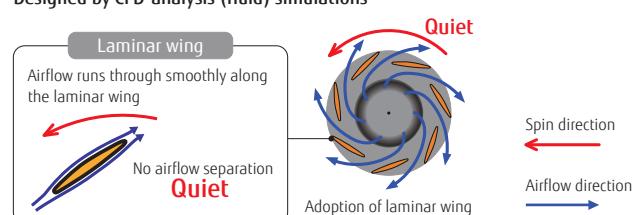

### Improvement of the airflow distribution




New louver: The louver design distributes air leaving a space between the chassis and the ceiling allowing far and wide airflow distribution.

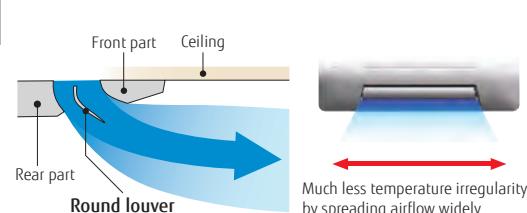

Much less temperature irregularity by spreading airflow widely

### Low ambient operation

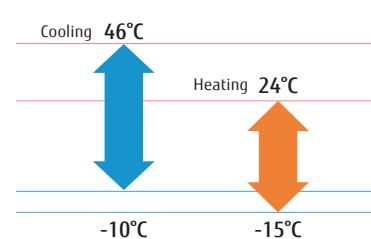

Model : AUYG12LVLB / AUYG14LVLB / AUYG18LVLB / AUYG24LVLA



Wireless R.C.



For AUYG12/14LVLB



For AUYG18LVLB



For AUYG24LVLA

### Specifications

| Model No.                               | Indoor unit                     |         | AUYG12LVLB    | AUYG14LVLB    | AUYG18LVLB     | AUYG24LVLA     |
|---|---------------------------------|---------|---------------|---------------|----------------|----------------|
|   | Outdoor unit                    |         | AOYG12LALL    | AOYG14LALL    | AOYG18LBCB     | AOYG24LBCB     |
| Power Source                            | Single-phase, ~230V, 50Hz       |         |               |               |                |                |
| Capacity                                | Cooling                         | kW      | 3.5 (0.9-4.4) | 4.3 (0.9-5.4) | 5.2 (0.9-5.9)  | 6.8 (0.9-8.0)  |
|   | Heating                         |         | 4.1 (0.9-5.7) | 5.0 (0.9-6.5) | 6.0 (0.9-7.5)  | 6.8 (0.9-8.0)  |
| Input Power                             | Cooling/Heating                 | kW      | 1.05/1.11     | 1.33/1.34     | 1.62/1.66      | 2.21/2.26      |
| EER                                     | Cooling                         |         | 3.33          | 3.21          | 3.21           | 3.08           |
| COP                                     | Heating                         |         | 3.69          | 3.71          | 3.61           | 3.54           |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW      | 3.5/4.2       | 4.3/4.5       | 5.2/5.2        | 6.8/6.0        |
| SEER                                    | Cooling                         |         | 6.20          | 6.40          | 6.20           | 5.60           |
| SCOP                                    | Heating (Average)               |         | 4.10          | 4.40          | 4.20           | 3.90           |
| Energy Efficiency Class                 | Cooling                         |         | A++           | A++           | A++            | A+             |
|   | Heating (Average)               |         | A+            | A+            | A+             | A              |
| Max. Operating Current                  | Cooling/Heating                 | A       | 7.5/10.0      | 9.0/12.5      | 9.0/14.5*      | 12.0/15.7*     |
| Annual Energy Consumption               | Cooling                         |         | 198           | 235           | 293            | 425            |
|   | Heating                         |         | 1431          | 1432          | 1731           | 2151           |
| Moisture Removal                        |                                 | l/h     | 1.2           | 1.5           | 2.2            | 2.7            |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q | 37/34/30/27   | 38/34/30/27   | 46/42/38/28    | 46/42/38/28    |
|   | Indoor (Heating)                | H/M/L/Q | 37/34/31/29   | 43/38/34/30   | 43/38/34/30    | 49/45/40/33    |
|   | Outdoor(Cooling/Heating)        | High    | 47/48         | 49/49         | 50/50          | 53*/54*        |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High    | 49/49         | 50/55         | 50/55          | 59/61          |
|   | Outdoor(Cooling/Heating)        | High    | 61/63         | 62/64         | 62/65          | 66*/66*        |
| Airflow Rate                            | Indoor / Outdoor                | High    | m³/h          | 600/1780      | 680/1910       | 680*/2380      |
|   |                                 |         | mm            | 245×570×570   | 245×570×570    | 245×570×570    |
| Net Dimensions H x W x D                | Indoor                          |         | kg(lbs)       | 15 (33)       | 15 (33)        | 16 (35)        |
| Weight                                  | Outdoor                         |         | mm            | 578×790×300   | 632*×799*×290* | 714*×820*×315* |
|   |                                 |         | kg(lbs)       | 40 (88)       | 40 (88)        | 42 (95)        |
| Connection Pipe Diameter (Liquid / Gas) |                                 |         | mm            | 6.35/9.52     | 6.35/12.70     | 6.35/15.88     |
| Drain hose Diameter (I.D.O.D.)          |                                 |         | mm            | 25/32         | 25/32          | 25/32          |
| Max Pipe Length (Pre-Charge)            |                                 | m       |               | 25 (15)       | 25 (15)        | 30 (15)        |
| Max Height Difference                   |                                 |         |               | 15            | 15             | 20             |
| Operation Range                         | Cooling                         | °CDB    | -10 to 46     | -10 to 46     | -10 to 46      | -10 to 46      |
|   | Heating                         |         | -15 to 24     | -15 to 24     | -15 to 24      | -15 to 24      |
| Refrigerant                             | Type (Global Warming Potential) |         | R410A (2,088) | R410A (2,088) | R410A (2,088)  | R410A (2,088)  |
| Charge                                  | kg(CO2eq-T)                     |         | 1.15 (2.4)    | 1.25 (2.6)    | 1.20 (2.5)     | 1.50 (3.1)     |
| Model name                              |                                 |         | UTG-UFYD-W    | UTG-UFYD-W    | UTG-UFYD-W     | UTG-UFYD-W     |
| Cassette Grille                         | Dimensions (H × W × D)          | mm      | 49×700×700    | 49×700×700    | 49×700×700     | 49×700×700     |
|   | Weight                          | kg(lbs) | 2.6 (6)       | 2.6 (6)       | 2.6 (6)        | 2.6 (6)        |

\*:That specification is not fixed yet.

### Optional parts

Air Outlet Shutter Plate:

UTR-YDZB

Insulation Kit For High Humidity: UTZ-KXGC

Wired Remote Controller:

UTY-RNNYM, UTY-RVNYM

Fresh Air Intake Kit:

UTZ-VXAA


Simple Remote Controller:


UTY-RSNYM



### Dimensions

(Unit : mm)

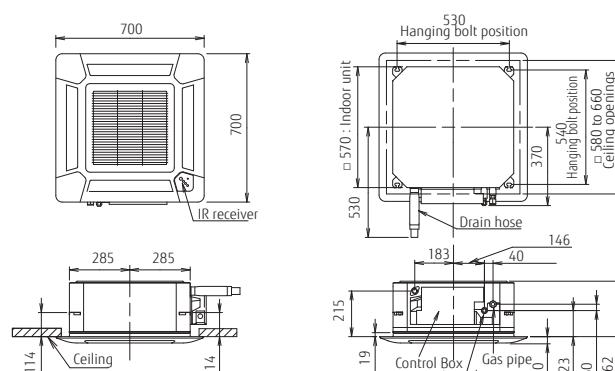




## PRODUCT LINEUP: SPLIT

**Cassette**  
**Circular Flow**  
Comfort for large room

**ALL DC** **i-PAM**

### Unique Circular Flow design

New Cassette type realizes Circular Flow to blow large airflow in 360° direction by mounting high performance DC fan motor, new turbo fan and unique seamless airflow louver design.

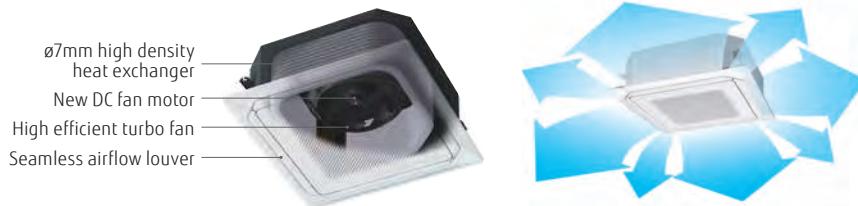

### Individual louver control

Each louver can be set individually by Touch Panel Wired Remote Controller to enjoy the comfort of different directional airflows according to various room layouts.


\*Touch Panel Wired RC (UTY-RNRYZ2)only



Comfortable air conditioning by preventing direct blowing of cold air and by providing swinging air flow simultaneously.  
Efficient air conditioning based on the room layout

### Human sensor increases more energy saving

Energy saving operation starts automatically by detecting the motion of a person. 2 modes of save operation mode and stop mode can be selected.



2 modes can be selected.

**Auto saving** Power is saved while people are away.

**Auto OFF** Operation stops after people go out.

\*Touch Panel Wired RC (UTY-RNRYZ2) only

Human sensor (Option)

### Various Cassette Grille

Both black and white color grilles are available. There are three types, white color grille with Remote Controller, only white color grille and only black color grille. Possible to choose according to the atmosphere and the use of the room.



**UTG-UKYA-W**  
White Color Grille  
With touch panel wired remote controller



**UTG-UKYA-B**  
Black Color Grille



**UTG-UKYC-W**  
White Color Grille

**Model: AUXG18LRB / AUXG24LRB  
AUXG30LRB / AUXG36LRB / AUXG45LRB / AUXG54LRB**



Touch Panel Wired R.C.



For AUXG18/24LRB For AUXG30/36LRB For AUXG45/54LRB

**Specifications**

| Model No.                               | Indoor unit                     |               | AUXG18LRB     | AUXG24LRB  | AUXG30LRB       | AUXG36LRB       | AUXG45LRB       | AUXG54LRB       |
|---|---------------------------------|---------------|---------------|--|-----------------|-----------------|-----------------|-----------------|
|   | Outdoor unit                    |               | AOYG18LBCA    | AOYG24LBCA   | AOYG30LBTA      | AOYG36LBTA      | AOYG45LBTA      | AOYG54LBTA      |
| Power Source                            |                                 |               |               |  |                 |                 |                 |                 |
| Capacity                                | Cooling                         | kW            | 5.2 (0.9-6.5) | 6.8 (0.9-8.0)  | 8.5 (2.8-10.0)  | 9.5 (2.8-11.2)  | 12.5 (4.0-14.0) | 13.3 (4.5-14.5) |
|   | Heating                         |               | 6.0 (0.9-8.0) | 7.8 (0.9-9.1)  | 10.0 (2.7-11.2) | 10.8 (2.7-12.7) | 14.0 (4.2-16.2) | 15.8 (4.7-16.5) |
| Input Power                             | Cooling/Heating                 | kW            | 1.42/1.50     | 2.16/2.18  | 2.56/2.77       | 2.96/2.91       | 3.85/3.73       | 4.38/4.58       |
| EER                                     | Cooling                         |               | 3.66          | 3.15   | 3.32            | 3.21            | 3.25            | 3.04            |
| COP                                     | Heating                         |               | 4.00          | 3.58   | 3.61            | 3.71            | 3.75            | 3.45            |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW            | 5.2/4.3       | 6.8/6.0  | 8.5/8.0         | 9.5/8.7         | -               | -               |
| SEER                                    | Cooling                         |               | 7.05          | 6.60   | 6.70            | 6.40            | -               | -               |
| SCOP                                    | Heating (Average)               |               | 4.40          | 4.20   | 4.30            | 4.30            | -               | -               |
| Energy Efficiency Class                 | Cooling                         |               | A++           | A++  | A++             | A++             | -               | -               |
|   | Heating (Average)               |               | A+            | A+   | A+              | A+              | -               | -               |
| Max. Operating Current                  | Cooling/Heating                 | A             | 10.0/13.5     | 13.5/18.5  | 17.0/17.0       | 20.0/20.0       | 20.5/20.5       | 21.5/21.5       |
| Annual Energy Consumption               | Cooling                         | kWh/a         | 258           | 361  | 444             | 519             | -               | -               |
|   | Heating                         |               | 1367          | 1999   | 2604            | 2833            | -               | -               |
| Moisture Removal                        |                                 | l/h           | 2.2           | 2.7  | 2.5             | 3.3             | 4.5             | 5.0             |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q       | 33/32/31/28   | 35/33/32/29  | 40/38/36/33     | 44/41/38/34     | 46/42/39/35     | 47/43/40/36     |
|   | Indoor (Heating)                | H/M/L/Q       | 33/32/31/28   | 35/33/32/29  | 40/38/36/33     | 44/41/38/34     | 46/42/39/35     | 47/43/40/36     |
|   | Outdoor(Cooling/Heating)        | High          | 51/50         | 55/56  | 53/55           | 54/55           | 55/55           | 55/57           |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High          | 47/47         | 49/49  | 54/54           | 58/58           | 60/60           | 61/61           |
|   | Outdoor(Cooling/Heating)        | High          | 64/62         | 68/68  | 67/69           | 68/70           | 68/68           | 69/71           |
| Airflow Rate                            | Indoor / Outdoor                | High          | m³/h          | 1050/1900  | 1150/2460       | 1600/3600       | 1900/3800       | 2000/6750       |
|   | Indoor                          |               | mm            | 246×840×840  | 246×840×840     | 288×840×840     | 288×840×840     | 288×840×840     |
| Net Dimensions H x W x D                |                                 |               | kg(lbs)       | 24 (53)  | 24 (53)         | 26 (57)         | 26 (57)         | 29 (64)         |
| Weight                                  | Outdoor                         |               | mm            | 620×790×290  | 620×790×290     | 830×900×330     | 830×900×330     | 1290×900×330    |
|   |                                 |               | kg(lbs)       | 41 (90)  | 41 (90)         | 61 (134)        | 61 (134)        | 86 (189)        |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm            | 6.35/12.7     | 6.35/15.88   | 9.52/15.88      | 9.52/15.88      | 9.52/15.88      | 9.52/15.88      |
| Drain hose Diameter (I.D./O.D.)         |                                 | mm            | 25/32         | 25/32  | 25/32           | 25/32           | 25/32           | 25/32           |
| Max Pipe Length (Pre-Charge)            |                                 | m             | 30 (15)       | 30 (15)  | 50 (20)         | 50 (20)         | 50 (20)         | 50 (20)         |
| Max Height Difference                   |                                 | m             | 20            | 20   | 30              | 30              | 30              | 30              |
| Operation Range                         | Cooling                         | °CDB          | -15 to 46     | -15 to 46  | -15 to 46       | -15 to 46       | -15 to 46       | -15 to 46       |
|   | Heating                         |               | -15 to 24     | -15 to 24  | -15 to 24       | -15 to 24       | -15 to 24       | -15 to 24       |
| Refrigerant                             | Type (Global Warming Potential) | R410A (2,088) | R410A (2,088) | R410A (2,088)  | R410A (2,088)   | R410A (2,088)   | R410A (2,088)   | R410A (2,088)   |
| Charge                                  | kg(CO2eq-T)                     | 1.80 (3.8)    | 1.80 (3.8)    | 2.10 (4.4)   | 2.10 (4.4)      | 3.35 (7.0)      | 3.35 (7.0)      | 3.35 (7.0)      |
| Cassette Grille                         | Variation                       |               |               | UTG-UKYA-W: White Color with touch panel wired remote controller<br>UTG-UKYC-W: White Color / UTG-UKYA-B*: Black Color |                 |                 |                 |                 |
|   | Dimensions (H × W × D)          | mm            | 53×950×950    | 53×950×950   | 53×950×950      | 53×950×950      | 53×950×950      | 53×950×950      |
|   | Weight                          | kg(lbs)       | 6.0 (13)      | 6.0 (13)   | 6.0 (13)        | 6.0 (13)        | 6.0 (13)        | 6.0 (13)        |


\*1: IR Receiver kit and human sensor kit cannot be connected.

**Optional parts**


|                           |  |   |                                    |
|---------------------------|--|---|------------------------------------|
| Wired Remote Controller:  | UTY-RNRYZ2, UTY-RVNYM, UTY-RLRY, UTY-RNYYM | Air Outlet Shutter Plate:                 | UTR-YDZK                           |
|                           |  | Insulation Kit For High Humidity:         | UTZ-KXRA                           |
| Simple Remote Controller: | UTY-RSNYM, UTY-RSRY                        | Flesh Air Intake Kit:                     | UTZ-VXRA                           |
| IR Receiver Kit:          | UTY-LBTYC                                  | External input and output PCB (with box): | UTY-XCSX + UTZ-GXRA                |
| Human Sensor Kit:         | UTY-SHZXC                                  | External connect kit:                     | UTY-XWZXZG, UTY-XWZXZ3             |
| Wide Panel:               | UTG-AKXA-W                                 | Cassette Grille :                         | UTG-UKYA-W, UTG-UKYA-B, UTG-UKYC-W |
| Panel Spacer:             | UTG-BKXA-W                                 | Wireless LAN Interface:                   | UTY-TFNXZ1                         |

**Dimensions**

(Unit : mm)

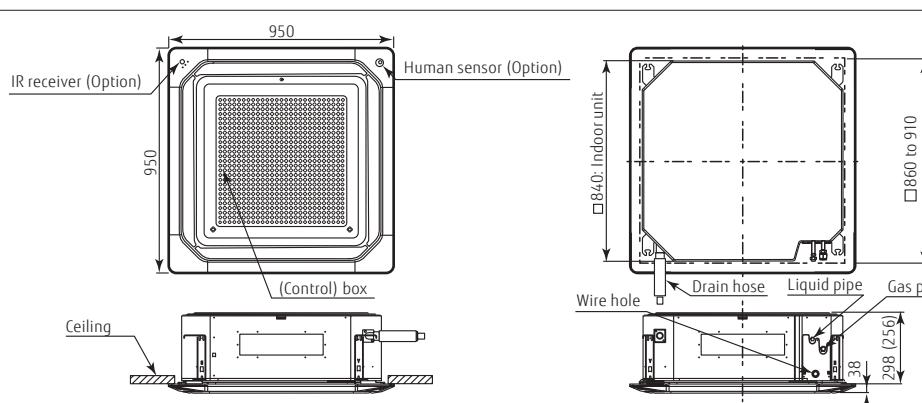

( ): AUXG18/24LRB



## PRODUCT LINEUP: SPLIT

**Cassette**  
**4-way Flow**  
Comfort for large room




Single phase
ALL DC
i-PAM
(45/54)

Economy
Changover
Up/Down
Adjust
R
Duct
+Setback
Filter
Drain Pump
Blue Fin

### High efficiency turbo fan with 3-dimensional blade


Previous turbo fan: Air passing through the heat exchanger was uneven and the air would only flow close to the ceiling.

New turbo fan: High efficiency airflow distribution has been achieved by the introduction of a 3 dimensional blade which increases the air passing over the heat exchanger.

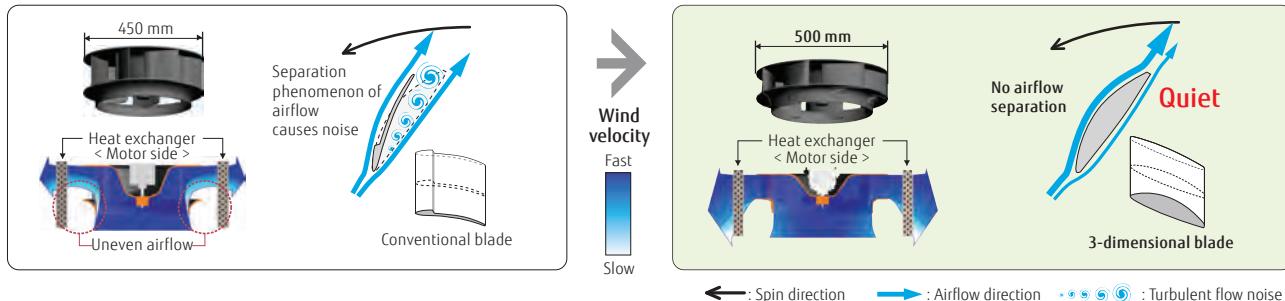

### Improvement of the airflow distribution

New louver: The louver design distributes air leaving a space between the chassis and the ceiling allowing far and wide airflow distribution.

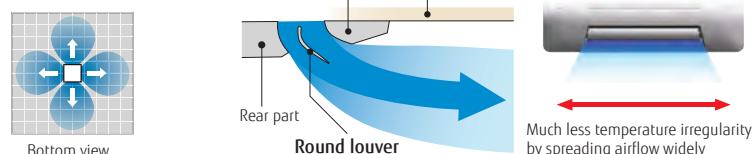


### Adjustment of hanger position is possible after installation

Hanging bracket can be checked directly by removing the corner cover. Hanging position can be arranged easily.



### Low ambient operation

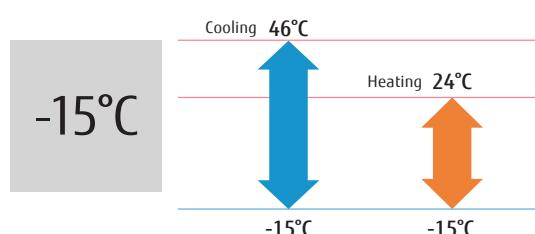

**Model : AUYG30LRLE / AUYG36LRLE / AUYG45LRLA / AUYG54LRLA /  
AUYG36LRLA [3phase] / AUYG45LRLA [3phase] / AUYG54LRLA [3phase]**



Wired R.C.



For AUYG30/36LRLE

For AUYG45LRLA  
(Single-phase)

For AUYG36/45/54LRLA

### Specifications

| Model No.                               | Indoor unit                     |                          | Tentative       |                 |                 |                 |                 |
|---|---------------------------------|--------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|   | Outdoor unit                    | AUYG30LRLE               | AUYG36LRLE      | AUYG45LRLA      | AUYG45LRLA      | AUYG54LRLA      |                 |
| <b>Power Source</b>                     |                                 |                          |                 |                 |                 |                 |                 |
| Capacity                                | Cooling                         | kW                       | 8.5 (2.8-10.0)  | 10.0 (2.8-11.2) | 12.1 (4.0-13.5) | 12.5 (4.0-14.0) | 13.3 (4.5-14.5) |
|   | Heating                         |                          | 10.0 (2.7-11.2) | 11.2 (2.7-12.7) | 13.5 (4.2-15.7) | 14.0 (4.2-16.2) | 16.0 (4.7-16.5) |
| Input Power                             | Cooling/Heating                 | kW                       | 2.65/2.77       | 3.12/3.02       | 3.89/3.85       | 3.88/3.88       | 4.42/4.69       |
| EER                                     | Cooling                         |                          | 3.21            | 3.21            | 3.11            | 3.22            | 3.01            |
| COP                                     | Heating                         |                          | 3.61            | 3.71            | 3.51            | 3.71            | 3.41            |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW                       | 8.5/8.0         | 10.0/8.7        | -               | -               | -               |
| SEER                                    | Cooling                         |                          | 6.50            | 6.30            | -               | -               | -               |
| SCOP                                    | Heating (Average)               |                          | 4.30            | 4.20            | -               | -               | -               |
| Energy Efficiency Class                 | Cooling                         |                          | A++             | A++             | -               | -               | -               |
|   | Heating (Average)               |                          | A+              | A+              | -               | -               | -               |
| Max. Operating Current                  | Cooling/Heating                 | A                        | 17.0/17.0       | 18.5/20.0       | 23.5/23.5       | 20.5/20.5       | 21.5/21.5       |
| Annual Energy Consumption               | Cooling                         | kWh/a                    | 458             | 555             | -               | -               | -               |
|   | Heating                         |                          | 2604            | 2897            | -               | -               | -               |
| Moisture Removal                        |                                 | I/h                      | 2.5             | 3.5             | 4.5             | 4.5             | 5.0             |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q                  | 40/38/36/32     | 43/38/36/32     | 46/42/40/36     | 46/42/40/36     | 47/43/41/37     |
|   | Indoor (Heating)                | H/M/L/Q                  | 40/38/36/32     | 43/38/36/32     | 46/42/40/36     | 46/42/40/36     | 47/43/41/37     |
|   | Outdoor(Cooling/Heating)        | High                     | 53/55           | 54/55           | 58/58           | 55/55           | 55/57           |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High                     | 54/54           | 57/57           | 61/60           | -               | -               |
|   | Outdoor(Cooling/Heating)        | High                     | 68/69           | 69/70           | 72/72           | -               | -               |
| Airflow Rate                            | Indoor / Outdoor                | High                     | 1600/3600       | 1800/3800       | 4,650/4,650     | 1900/6750       | 2000/6750       |
| Net Dimensions H x W x D                | Indoor                          | mm                       | 288x840x840     | 288x840x840     | 288x840x840     | 288x840x840     | 288x840x840     |
| Weight                                  | Outdoor                         | kg(lbs)                  | 26 (57)         | 26 (57)         | 26 (57)         | 26 (57)         | 26 (57)         |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm                       | 9.52/15.88      | 9.52/15.88      | 9.52/15.88      | 9.52/15.88      | 9.52/15.88      |
| Drain hose Diameter (I.D./O.D.)         |                                 | mm                       | 25.0/32.0       | 25.0/32.0       | 25.0/32.0       | 25.0/32.0       | 25.0/32.0       |
| Max Pipe Length (Pre-Charge)            |                                 | m                        | 50 (20)         | 50 (20)         | 50 (20)         | 15 (15)         | 50 (20)         |
| Max Height Difference                   |                                 |                          | 30              | 30              | 30              | 30              | 30              |
| Operation Range                         | Cooling                         | °CDB                     | -15 to 46       | -15 to 46       | -15 to 46       | -10 to 46       | -15 to 46       |
|   | Heating                         |                          | -15 to 24       |
| Refrigerant                             | Type (Global Warming Potential) |                          | R410A (2,088)   |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) | 2.10 (4.4)      | 2.10 (4.4)      | 2.90 (6.1)      | 3.35 (7.0)      | 3.35 (7.0)      |
| Cassette Grille                         | Model name                      |                          | UTG-UGYA-W      | UTG-UGYA-W      | UTG-UGYA-W      | UTG-UGYA-W      | UTG-UGYA-W      |
|   | Dimensions (H × W × D)          | mm                       | 50×950×950      | 50×950×950      | 50×950×950      | 50×950×950      | 50×950×950      |
|   | Weight                          | kg(lbs)                  | 5.5 (12)        | 5.5 (12)        | 5.5 (12)        | 5.5 (12)        | 5.5 (12)        |

| AUYG36LRLA           | AUYG45LRLA      | AUYG54LRLA      |
|----------------------|-----------------|-----------------|
| AOYG36LATT           | AOYG45LATT      | AOYG54LATT      |
| 3-phase, ~400V, 50Hz |                 |                 |
| 10.0 (4.7-11.4)      | 12.5 (5.0-14.0) | 14.0 (5.4-16.0) |
| 11.2 (5.0-14.0)      | 14.0 (5.4-16.2) | 16.0 (5.8-18.0) |
| 2.44/2.56            | 3.54/3.54       | 4.36/4.43       |
| 4.10                 | 3.53            | 3.21            |
| 4.38                 | 3.91            | 3.61            |
| 10.0/10.0            | -               | -               |
| 6.50                 | -               | -               |
| 4.30                 | -               | -               |
| A++                  | -               | -               |
| A+                   | -               | -               |
| 7.9/7.9              | 8.9/8.9         | 9.9/9.9         |
| 538                  | -               | -               |
| 3253                 | -               | -               |
| 3.0                  | 4.5             | 5.0             |
| 44/39/36/33          | 46/42/40/36     | 47/43/41/37     |
| 44/39/36/33          | 46/42/40/36     | 47/43/41/37     |
| 51/53                | 54/55           | 55/56           |
| 58/58                | -               | -               |
| 67/69                | -               | -               |
| 1800/6200            | 1900/6750       | 2000/6900       |
| 288x840x840          | 288x840x840     | 288x840x840     |
| 26 (57)              | 26 (57)         | 26 (57)         |
| 1290×900×330         | 1290×900×330    | 1290×900×330    |
| 104 (229)            | 104 (229)       | 104 (229)       |
| 9.52/15.88           | 9.52/15.88      | 9.52/15.88      |
| 25.0/32.0            | 25.0/32.0       | 25.0/32.0       |
| 75 (30)              | 75 (30)         | 75 (30)         |
| 30                   | 30              | 30              |
| -15 to 46            | -10 to 46       | -15 to 46       |
| -15 to 24            | -15 to 24       | -15 to 24       |
| R410A (2,088)        | R410A (2,088)   | R410A (2,088)   |
| 3.45 (7.2)           | 3.45 (7.2)      | 3.45 (7.2)      |
| UTG-UGYA-W           | UTG-UGYA-W      | UTG-UGYA-W      |
| 50×950×950           | 50×950×950      | 50×950×950      |
| 5.5 (12)             | 5.5 (12)        | 5.5 (12)        |


### Optional parts


|   |  |
|---|--|
| Wired Remote Controller: UTY-RNNYM, UTY-RVNYM | Air Outlet Shutter Plate: UTR-YDZK         |
| Simple Remote Controller: UTY-RSNYM           | Insulation Kit For High Humidity: UTZ-KXRA |
| IR Receiver Kit: UTY-LRHYA2                   | Fresh Air Intake Kit: UTZ-VXRA             |
| Wide Panel: UTG-AKXA-W                        | Wireless LAN Interface: UTY-TFNXZ1         |
| Panel Spacer: UTG-BKXA-W                      |  |



### Dimensions

(Unit : mm)

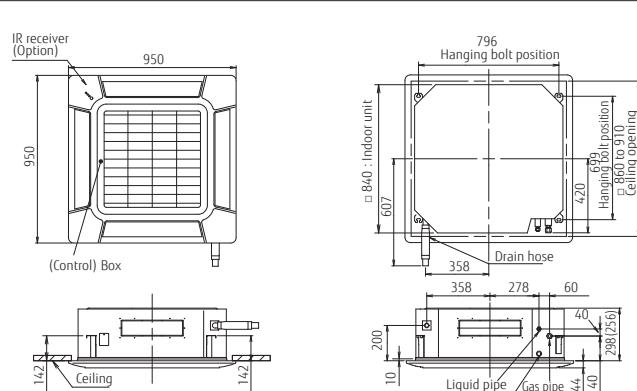




## PRODUCT LINEUP: SPLIT

### Mini Duct


Built-in Drain Pump

ALL  
DC

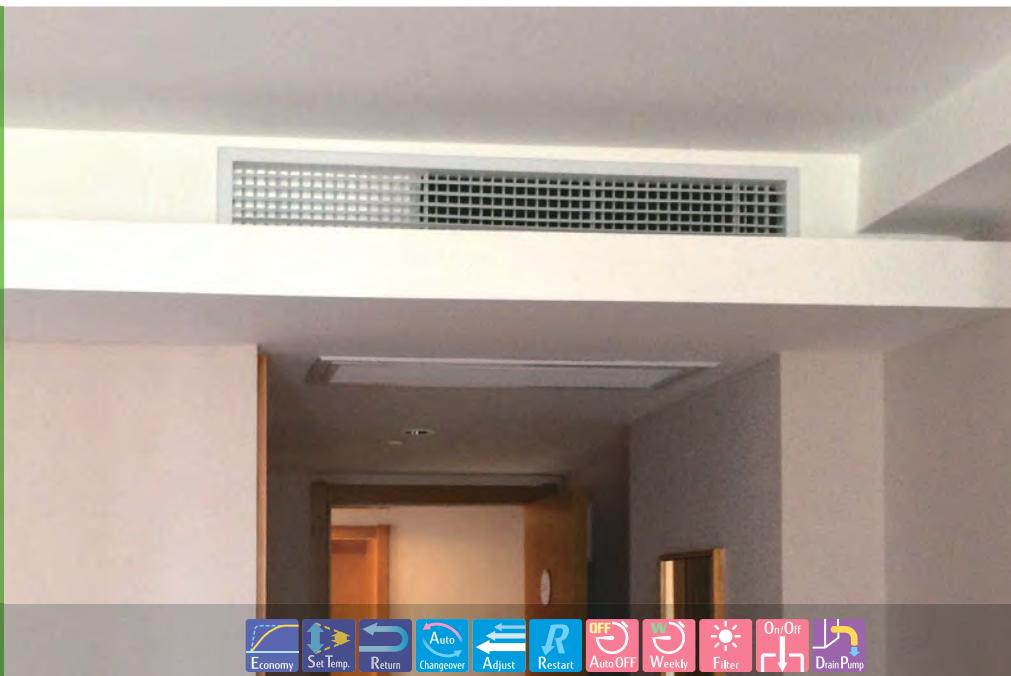


#### Large living space available

- Installation space can be reduced down to minimum depth 450 mm height 198 mm and compact design
- Minimum size: Depth 450 mm, Height 198 mm Volume 27% down compared with current model
- Lightweight: 15.5 kg 18% down (12/14 class)

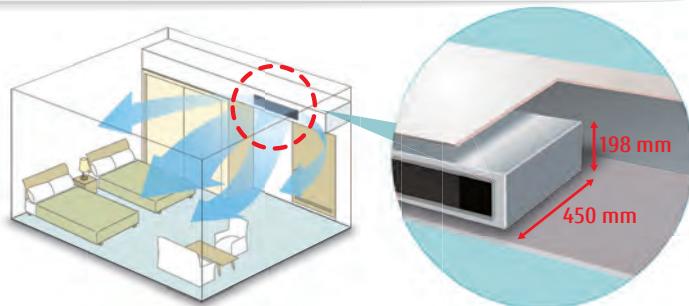

#### Optimum airflow path and low noise operation

Low noise is realized drastically by stabilized airflow design

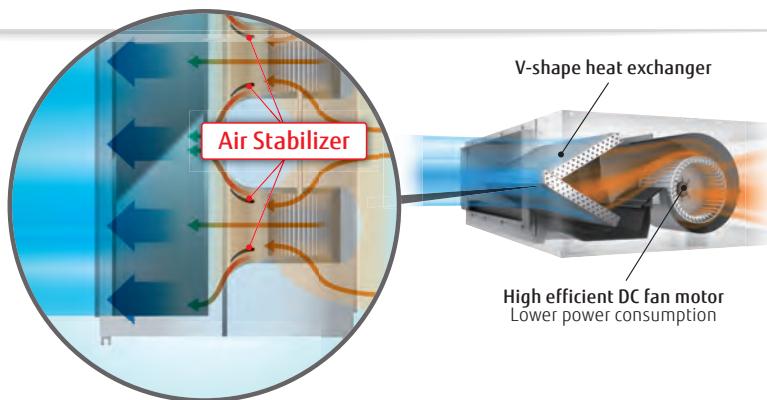


#### Easy design and maintenance for drain

By using the DC fan motor, it is possible to change the static pressure range from 0 to 50 Pa\*.

The change of static pressure range is possible by remote controller.

\*: 0 to 30 Pa. (12)

**Built-in drain pump as standard:**  
Maintenance is easy

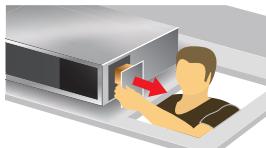

Parts can be replaced from the side of the body where maintenance is easier

#### Auto Louver Grille Kit (Option)

- Thin design provides a comfortable living environment over a wide area.
- Automatic louver grille provides comfortable air conditioning all the way down to the floor and matches the interior design well. (Optional)



**Model : ARYG12LSLAP / ARYG14LSLAP / ARYG18LSLAP**


ARYG12/14LSLAP



ARYG18LSLAP



Wired R.C.



For ARYG12/14LSLAP



For ARYG18LSLAP

**Specifications**

| Model No.                               | Indoor unit                     |                          | ARYG12LSLAP   | ARYG14LSLAP   | Tentative      |
|---|---------------------------------|--------------------------|---------------|---------------|----------------|
|   | Outdoor unit                    |                          | AOYG12LALL    | AOYG14LALL    | AOYG18LBCB     |
| <b>Power Source</b>                     |                                 |                          |               |               |                |
| Capacity                                | Cooling                         | kW                       | 3.5 (0.9-4.4) | 4.3 (0.9-5.4) | 5.2 (0.9-5.9)  |
|   | Heating                         |                          | 4.1 (0.9-5.7) | 5.0 (0.9-6.5) | 6.0 (0.9-7.5)  |
| Input Power                             | Cooling/Heating                 | kW                       | 1.03/1.15     | 1.34/1.49     | 1.62/1.77      |
| EER                                     | Cooling                         |                          | 3.40          | 3.21          | 3.21           |
| COP                                     | Heating                         |                          | 3.56          | 3.35          | 3.38           |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW                       | 3.5/4.2       | 4.3/4.5       | 5.2/5.2        |
| SEER                                    | Cooling                         |                          | 5.70          | 5.60          | 5.80           |
| SCOP                                    | Heating                         |                          | 3.90          | 3.80          | 3.80           |
| Energy Efficiency Class                 | Cooling                         |                          | A+            | A+            | A+             |
|   | Heating                         |                          | A             | A             | A              |
| Max. Operating Current                  | Cooling/Heating                 | A                        | 7.5/10.0      | 9.0/12.5      | 9.0/14.5*      |
| Annual Energy Consumption               | Cooling                         |                          | 215           | 269           | 314            |
|   | Heating                         |                          | 1505          | 1656          | 934            |
| Moisture Removal                        |                                 | l/h                      | 1.2           | 1.4           | 1.8            |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q                  | 31/27/25/23   | 35/30/27/23   | 33/29/26/23    |
|   | Indoor (Heating)                | H/M/L/Q                  | 31/27/25/23   | 35/30/27/23   | 33/29/26/23    |
|   | Outdoor(Cooling/Heating)        | High                     | 47/48         | 49/49         | 50/50          |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High                     | 55/57         | 60/62         | 58/59          |
|   | Outdoor(Cooling/Heating)        | High                     | 61/63         | 62/64         | 62/65          |
| Airflow Rate                            | Indoor / Outdoor                | High                     | 650/1780      | 800/1910      | 940*/2380      |
| Static pressure range (Standard)        |                                 | Pa                       | 0 - 30 (10)   | 0 - 50 (15)   | 0 - 50 (15)    |
| Net Dimensions H x W x D                | Indoor                          | mm                       | 198×700×450   | 198×700×450   | 198×900×450    |
| Weight                                  | Outdoor                         | kg(lbs)                  | 15.5 (34)     | 15.5 (34)     | 18.5 (41)      |
|   |                                 | mm                       | 578×790×300   | 578×790×300   | 632*×799*×290* |
|   |                                 | kg(lbs)                  | 40 (88)       | 40 (88)       | 36 (79)        |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm                       | 6.35/9.52     | 6.35/12.70    | 6.35/12.70     |
| Drain hose Diameter (I.D./O.D.)         |                                 | mm                       | 25/32         | 25/32         | 5              |
| Max Pipe Length (Pre-Charge)            |                                 | m                        | 25 (15)       | 25 (15)       | 25 (15)        |
| Max Height Difference                   |                                 |                          | 15            | 15            | 15             |
| Operation Range                         | Cooling                         | °CDB                     | -10 to 46     | -10 to 46     | -10 to 46      |
|   | Heating                         |                          | -15 to 24     | -15 to 24     | -15 to 24      |
| Refrigerant                             | Type (Global Warming Potential) |                          | R410A (2,088) | R410A (2,088) | R410A (2,088)  |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) | 1.15 (2.4)    | 1.25 (2.6)    | 1.20 (2.5)     |

\*That specification is not fixed yet.

**Optional parts**

Wired Remote Controller: UTY-RLRY, UTY-RNRYZ2, UTY-RVNYM

Auto Louver Grille Kit: UTD-GXTA-W (ARYG12/14LSLAP)

Simple Remote Controller: UTY-RSNYM, UTY-RSRY


UTD-GXTB-W (ARYG18LSLAP)

IR Receiver Kit: UTY-LBTYM

External connect kit: UTY-XWZXZG

Remote Sensor Unit: UTY-XSZX





Wireless LAN Interface: UTY-TFSXZ1

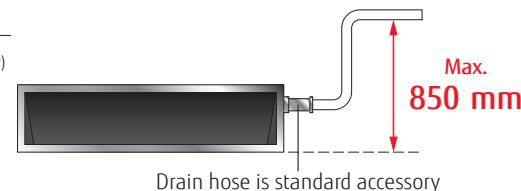


Drain hose is standard accessory

**Dimensions**

(Unit : mm)

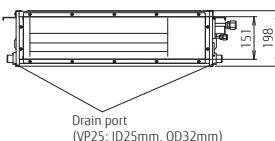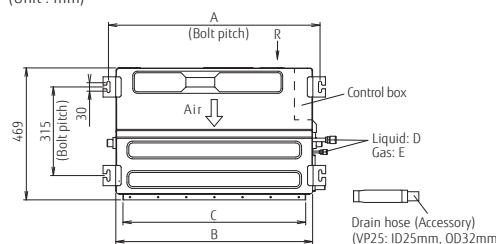

|   | ARYG12/14LSLAP | ARYG18LSLAP |
|---|----------------|-------------|
| A | 752            | 952         |
| B | 700            | 900         |
| C | 650            | 850         |
| D | 6.35           | 9.52        |
| E | 12,7           | 15.88       |




## PRODUCT LINEUP: SPLIT

**Slim Duct**  
Slim & Comfort

**ALL DC V-PAM**

### Slim design

The slim design allows installations where ceilings are narrow.  
Drain hose as standard accessory

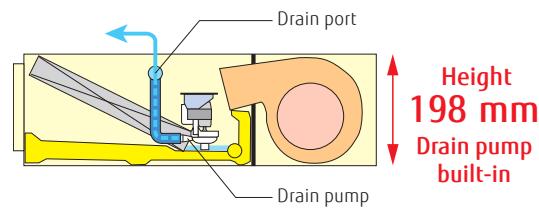

### Flexible installation

2-type installation methods of ceiling concealed and floor concealed can be selected.

Ceiling concealed



Floor concealed



### Selectable with a wide range of static pressure


By using the DC fan motor, it is possible to change the static pressure range from 0 to 90 Pa.  
The change of static pressure range is possible by remote controller.




Static pressure range  
0 to 90 Pa

### Auto Louver Grille Kit (Option)

Simple flat Auto Louver will provide comfort airflow and harmonize with luxury interior.

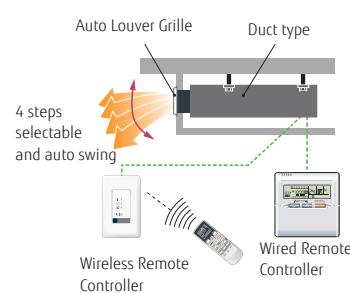

### Low ambient operation

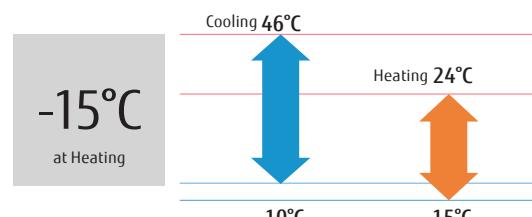

**Model : ARYG12LLTB / ARYG14LLTB / ARYG18LLTB**

ARYG12/14LLTB



ARYG18LLTB



Wired R.C.



For ARYG12/14LLTB      For ARYG18LLTB

**Specifications**

| Model No.                               | Indoor unit                     |                          | ARYG12LLTB    | ARYG14LLTB    | Tentative     |
|---|---------------------------------|--------------------------|---------------|---------------|---------------|
|   | Outdoor unit                    |                          | AOYG12LALL    | AOYG14LALL    | AOYG18LBCB    |
| Power Source                            |                                 |                          |               |               |               |
| Capacity                                | Cooling                         | kW                       | 3.5 (0.9-4.4) | 4.3 (0.9-5.4) | 5.2 (0.9-5.9) |
|   | Heating                         |                          | 4.1 (0.9-5.7) | 5.0 (0.9-6.5) | 6.0 (0.9-7.5) |
| Input Power                             | Cooling/Heating                 | kW                       | 1.05/1.11     | 1.33/1.34     | 1.62/1.66     |
| EER                                     | Cooling                         |                          | 3.33          | 3.21          | 3.21          |
| COP                                     | Heating                         |                          | 3.69          | 3.71          | 3.61          |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW                       | 3.5/4.2       | 4.3/4.5       | 5.2/5.2       |
| SEER                                    | Cooling                         |                          | 5.90          | 5.80          | 6.20          |
| SCOP                                    | Heating                         |                          | 4.00          | 3.90          | 4.10          |
| Energy Efficiency Class                 | Cooling                         |                          | A+            | A+            | A++           |
|   | Heating                         |                          | A+            | A             | A+            |
| Max. Operating Current                  | Cooling/Heating                 | A                        | 7.5/10.0      | 9.0/12.5      | 9.0/14.5*     |
| Annual Energy Consumption               | Cooling                         | kWh/a                    | 207           | 259           | 293           |
|   | Heating                         |                          | 1467          | 1614          | 7.4           |
| Moisture Removal                        |                                 | l/h                      | 1.3           | 1.5           | 2.0           |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q                  | 29/28/26/25   | 32/30/28/26   | 32/30/29/27   |
|   | Indoor (Heating)                | H/M/L/Q                  | 29/28/26/24   | 32/30/28/25   | 33/29/26/23   |
|   | Outdoor(Cooling/Heating)        | High                     | 47/48         | 49/49         | 50/50         |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High                     | 58/58         | 60/60         | 58/59         |
|   | Outdoor(Cooling/Heating)        | High                     | 61/63         | 62/64         | 62/65         |
| Airflow Rate                            | Indoor / Outdoor                | High                     | 650/1780      | 800/1910      | 940/2380      |
| Static pressure range (Standard)        |                                 | Pa                       | 0 to 90 (25)  | 0 to 90 (25)  | 0 to 90 (25)  |
| Net Dimensions H x W x D                | Indoor                          | mm                       | 198×700×620   | 198×700×620   | 198×900×620   |
| Weight                                  | Outdoor                         | kg(lbs)                  | 19 (42)       | 19 (42)       | 23 (51)       |
|   |                                 | mm                       | 578×790×300   | 578×790×300   | 632×799×290*  |
|   |                                 | kg(lbs)                  | 40 (88)       | 40 (88)       | 36 (79)       |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm                       | 6.35/9.52     | 6.35/12.70    | 6.35/12.70    |
| Drain hose Diameter (I.D./O.D.)         |                                 | mm                       | 25/32         | 25/32         | 25/32         |
| Max Pipe Length (Pre-Charge)            |                                 | m                        | 25 (15)       | 25 (15)       | 25 (15)       |
| Max Height Difference                   |                                 |                          | 15            | 15            | 15            |
| Operation Range                         | Cooling                         | °CDB                     | -10 to 46     | -10 to 46     | -10 to 46     |
|   | Heating                         |                          | -15 to 24     | -15 to 24     | -15 to 24     |
| Refrigerant                             | Type (Global Warming Potential) |                          | R410A (2,088) | R410A (2,088) | R410A (2,088) |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) | 1.15 (2.4)    | 1.25 (2.6)    | 1.20 (2.5)    |

\*That specification is not fixed yet.

**Optional parts**

Wired Remote Controller: UTY-RNNYM, UTY-RVNYM      Auto Louver Grille Kit: UTD-GXTA-W (For ARYG12 / 14LLTB)


Simple Remote Controller: UTY-RSNYM      UTD-GXTB-W (For ARYG18LLTB)

IR Receiver Kit: UTY-LRHYM


External connect kit: UTD-ECS5A

Remote Sensor Unit: UTY-XSZX


Wireless LAN Interface: UTY-TFNXZ1

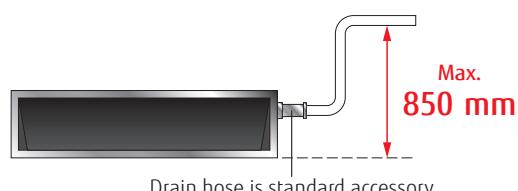**Dimensions**


(Unit : mm)

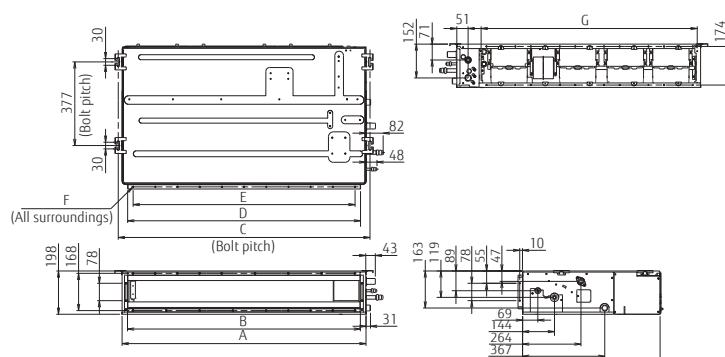

|   | ARYG12 / 14LLTB | ARYG18LLTB |
|---|-----------------|------------|
| A | 700             | 900        |
| B | 650             | 850        |
| C | 734             | 934        |
| D | 650             | 850        |
| E | P100x6=600      | P100x8=800 |
| F | 18x05           | 22x05      |
| G | 574             | 774        |




## PRODUCT LINEUP: SPLIT

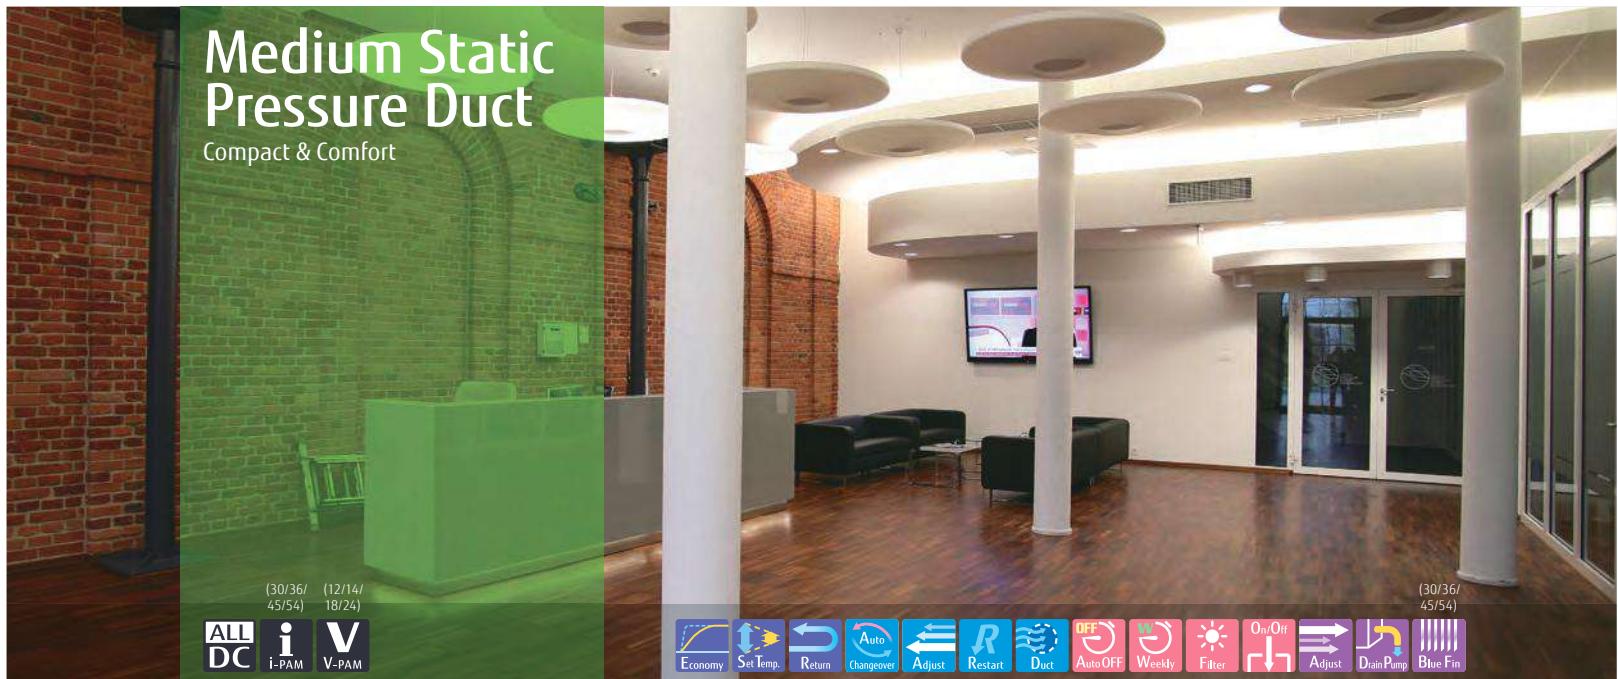

### High Efficiency & Quiet operation

The combination of the V-shaped heat exchanger, air stabilizer, and the high efficient DC fan motor allowed high efficiency and quiet operation.

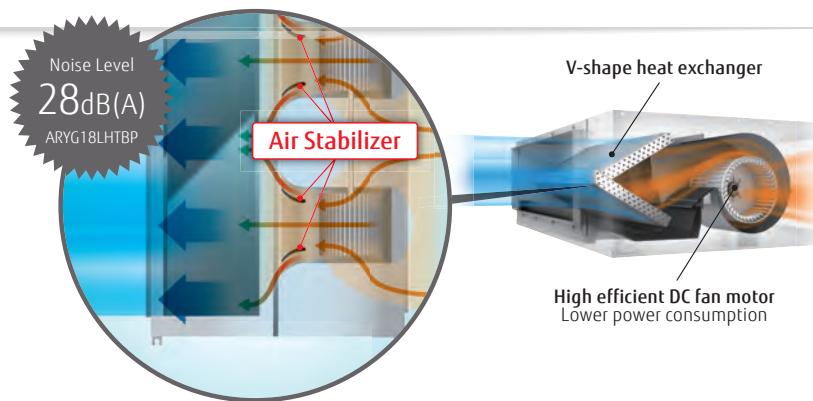


### Automatic Airflow adjustment function

This unique and innovative function detects required air flow in each application case and automatically adjust the volume.



### Improved installation flexibility


- Capable to be installed in various applications that requires static pressure of 30 Pa to 200 Pa
- Built-in drain pump, rises drain up to 850 mm
- Unified depth throughout the range enables the selection of the capacity regardless of the additional space.

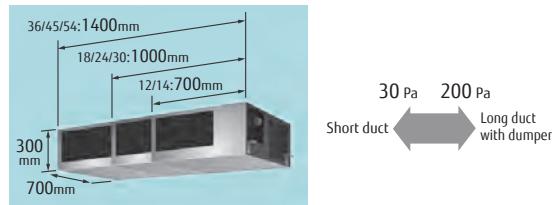

### Improved service and maintenance

- Drain pump is easily detachable from the side
- Easy access to electrical box
- Error code can be checked more in detail from error history

### Low ambient operation

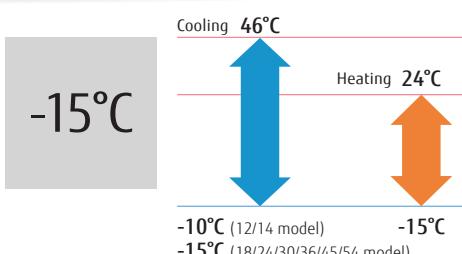

**Model:** ARYG12LHTBP / ARYG14LHTBP / ARYG18LHTBP / ARYG24LHTBP  
ARYG30LHTBP / ARYG36LHTBP / ARYG45LHTBP / ARYG54LHTBP




### Specifications

| Model No.                               | Indoor unit                     |                            | ARYG12LHTBP    | ARYG14LHTBP    | ARYG18LHTBP    | ARYG24LHTBP    | ARYG30LHTBP     | ARYG36LHTBP     | ARYG45LHTBP     | ARYG54LHTBP     |
|---|---------------------------------|----------------------------|----------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|
|   | Outdoor unit                    |                            | AOYG12LBA      | AOYG14LBA      | AOYG18LBCA     | AOYG24LBCA     | AOYG30LBTA      | AOYG36LBTA      | AOYG45LBTA      | AOYG54LBTA      |
| <b>Power Source</b>                     |                                 |                            |                |                |                |                |                 |                 |                 |                 |
| Capacity                                | Cooling                         | kW                         | 3.5 (0.9-4.4)  | 4.3 (0.9-5.4)  | 5.2 (0.9-6.5)  | 6.8 (0.9-8.0)  | 8.5 (2.8-10.0)  | 9.4 (2.8-11.2)  | 12.1 (4.0-14.0) | 13.4 (4.5-14.5) |
|   | Heating                         |                            | 4.1 (0.9-5.7)  | 5.0 (0.9-6.5)  | 6.0 (0.9-8.0)  | 8.0 (0.9-9.1)  | 10.0 (2.7-11.2) | 11.2 (2.7-12.7) | 13.3 (4.2-16.2) | 16.0 (4.7-16.5) |
| Input Power                             | Cooling/Heating                 | kW                         | 0.90/1.00      | 1.18/1.25      | 1.37/1.48      | 1.95/2.21      | 2.65/2.70       | 2.83/3.07       | 3.59/3.44       | 4.42/4.62       |
| EER                                     | Cooling                         | W/W                        | 3.89           | 3.64           | 3.80           | 3.49           | 3.21            | 3.32            | 3.37            | 3.03            |
| COP                                     | Heating                         |                            | 4.10           | 4.00           | 4.05           | 3.62           | 3.70            | 3.65            | 3.87            | 3.46            |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW                         | 3.5/4.2        | 4.3/4.5        | 5.2/4.3        | 6.8/6.0        | 8.5/8.0         | 9.4/8.7         | -               | -               |
| SEER                                    | Cooling                         | W/W                        | 6.20           | 6.10           | 7.15           | 6.50           | 5.95            | 5.81            | -               | -               |
| SCOP                                    | Heating (Average)               |                            | 4.10           | 4.00           | 4.11           | 4.01           | 3.95            | 3.81            | -               | -               |
| Energy Efficiency Class                 | Cooling                         |                            | A++            | A++            | A++            | A++            | A+              | A+              | -               | -               |
|   | Heating (Average)               |                            | A+             | A+             | A+             | A+             | A               | A               | -               | -               |
| Max. Operating Current                  | Cooling/Heating                 | A                          | 8.0/10.5       | 9.5/13.0       | 10.0/13.5      | 13.5/18.5      | 17.0/17.0       | 20.0/20.0       | 22.5/22.5       | 23.5/23.5       |
| Annual Energy Consumption               | Cooling                         | kWh/a                      | 198            | 247            | 255            | 366            | 500             | 566             | -               | -               |
|   | Heating                         |                            | 1434           | 1573           | 1462           | 2092           | 2833            | 3194            | -               | -               |
| Moisture Removal                        |                                 | I/h                        | 0.7            | 0.9            | 1.2            | 1.8            | 2.3             | 2.0             | 2.6             | 2.6             |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q                    | 32/27/26/24    | 33/28/27/25    | 28/25/22/20    | 32/28/24/21    | 36/33/30/29     | 36/31/28/26     | 39/35/31/29     | 39/35/31/29     |
|   | Indoor (Heating)                | H/M/L/Q                    | 32/27/26/24    | 33/28/27/25    | 28/25/22/20    | 32/28/24/21    | 36/33/30/29     | 33/31/28/26     | 39/35/31/29     | 39/35/31/29     |
|   | Outdoor(Cooling/Heating)        | High                       | 47/48          | 49/49          | 50/51          | 55/56          | 53/55           | 54/55           | 55/55           | 55/57           |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High                       | 57/58          | 59/60          | 54/54          | 57/57          | 63/65           | 64/63           | 67/69           | 67/69           |
|   | Outdoor(Cooling/Heating)        | High                       | 60/61          | 64/63          | 63/62          | 68/68          | 68/69           | 69/70           | 68/68           | 69/71           |
| Airflow Rate (High)                     | Indoor / Outdoor                | High                       | m³/h           | 850/1780       | 950/1910       | 1050/1900      | 1360/2460       | 1700/3600       | 2050/3800       | 2550/6750       |
| Static pressure range (Standard)        |                                 | Pa                         | 30 to 200 (35) | 30 to 200 (47)  | 30 to 200 (47)  | 30 to 200 (60)  | 30 to 200 (60)  |
| Net Dimensions H x W x D                | Indoor                          | mm                         | 300×700×700    | 300×700×700    | 300×1000×700   | 300×1000×700   | 300×1400×700    | 300×1400×700    | 300×1400×700    | 300×1400×700    |
| Weight                                  | Outdoor                         | kg(lbs)                    | 27 (59)        | 27 (59)        | 36 (79)        | 36 (79)        | 36 (79)         | 46 (101)        | 46 (101)        | 46 (101)        |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm                         | 6.35/9.52      | 6.35/12.70     | 6.35/12.70     | 6.35/15.88     | 9.52/15.88      | 9.52/15.88      | 9.52/15.88      | 9.52/15.88      |
| Drain hose Diameter (I.D./O.D.)         |                                 | mm                         | 25/32          | 25/32          | 25/32          | 25/32          | 25/32           | 25/32           | 25/32           | 25/32           |
| Max Pipe Length (Pre-Charge)            |                                 | m                          | 25 (15)        | 25 (15)        | 30 (15)        | 30 (15)        | 50 (20)         | 50 (20)         | 50 (20)         | 50 (20)         |
| Max Height Difference                   |                                 | m                          | 15             | 15             | 20             | 20             | 30              | 30              | 30              | 30              |
| Operation Range                         | Cooling                         | °CDB                       | -10 to 46      | -10 to 46      | -15 to 46      | -15 to 46      | -15 to 46       | -15 to 46       | -15 to 46       | -15 to 46       |
|   | Heating                         |                            | -15 to 24       | -15 to 24       | -15 to 24       | -15 to 24       |
| Refrigerant                             | Type (Global Warming Potential) |                            | R410A (2,088)   | R410A (2,088)   | R410A (2,088)   | R410A (2,088)   |
|   | Charge                          | [kg(CO <sub>2</sub> eq-T)] | 1.15 (2.4)     | 1.25 (2.6)     | 1.80 (3.8)     | 1.80 (3.8)     | 2.10 (4.4)      | 2.10 (4.4)      | 3.35 (7.0)      | 3.35 (7.0)      |

### Optional parts


|   |   |                         |                                  |
|---|---|-------------------------|----------------------------------|
| Wired Remote Controller:                      | UTY-RNRYZ2, UTY-RVNYM, UTY-RNNYM, UTY-RLRKY | Long life filter:       | UTD-LFNA (for ARYG36/45/54LHTBP) |
| Simple Remote Controller:                     | UTY-RSNYM, UTY-RSRY                         |                         | UTD-LFNB (for ARYG24/30LHTBP)    |
| IR Receiver Unit :                            | UTY-LBTYM                                   |                         | UTD-LFNC (for ARYG12/14LHTBP)    |
| External input and output PCB (with bracket): | UTY-XCSX + UTZ-GXNA                         | Remote Sensor Unit:     | UTY-XSZX                         |
| External connect kit:                         | UTY-XWZXZG, UTY-XWZXZ3                      | Wireless LAN Interface: | UTY-TFNXZ1                       |

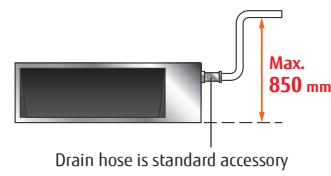


Drain hose is standard accessory

### Dimensions

(Unit : mm)

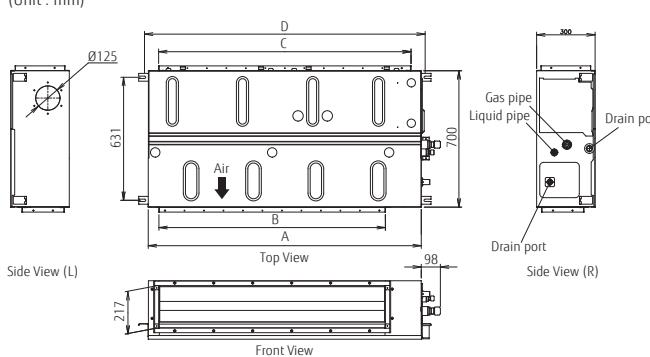

|   | ARYG12/14LHTBP | ARYG18/24/30LHTBP | ARYG36/45/54LHTBP |
|---|----------------|-------------------|-------------------|
| A | 700            | 1,000             | 1,400             |
| B | 462            | 762               | 1,162             |
| C | 650            | 895               | 1,295             |
| D | 740            | 1,040             | 1,440             |




## PRODUCT LINEUP: SPLIT

### Medium Static Pressure Duct

Standard


Single phase  
(30/36/45) (24)

**ALL DC** **i-PAM** **V-PAM**

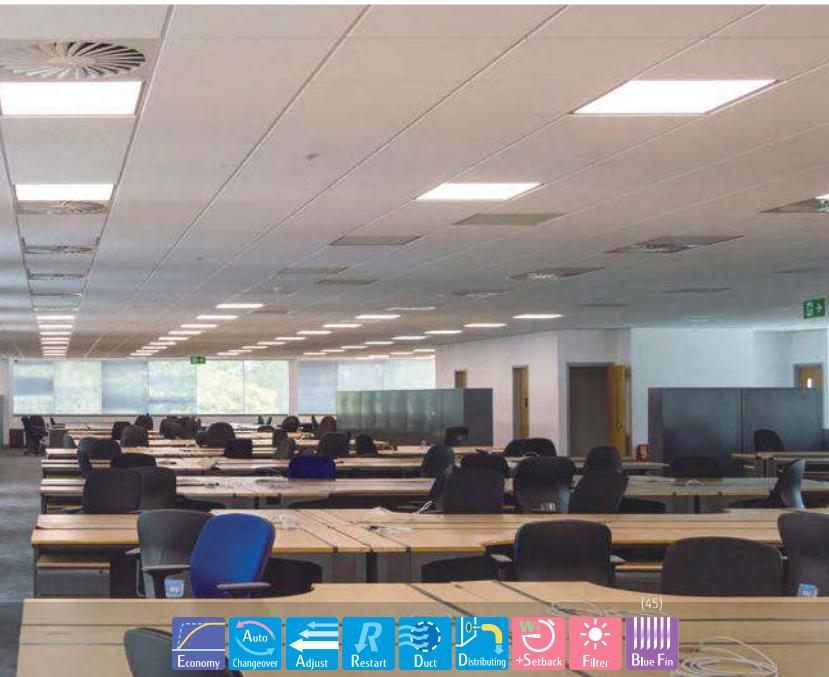


#### Slim & Compact design

In the case of bottom return air connection, not only does the indoor unit design allow for installation in a narrow ceiling space of up to 270 mm, further space savings have been achieved by mounting the control box internally inside the chassis.

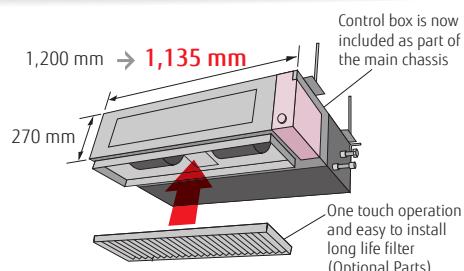


#### Two-direction drain piping

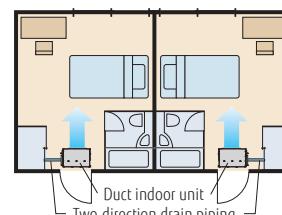


#### Easy maintenance

Structural improvement is attained by making the bottom panel two pieces, front and rear. The internal fan casing is also manufactured in two pieces, namely upper and lower. The maintenance of the motor and fan can be easily carried out by removing the rear panel and the lower part of the casing while leaving the main chassis installed.

#### See below for the case of rear suction type

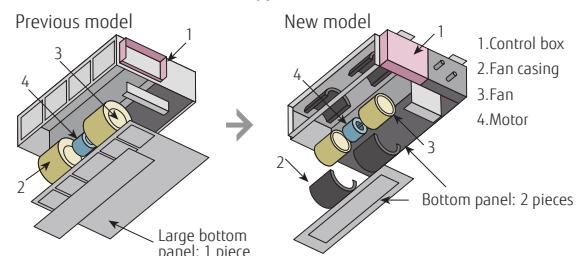

#### Low ambient operation

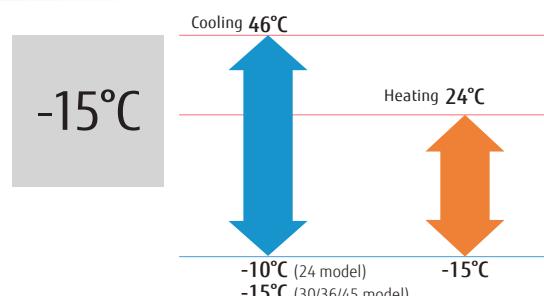

**Model : ARYG24LMLA / ARYG30LMLE / ARYG36LMLE / ARYG45LMLA /  
ARYG36LMLA [3phase] / ARYG45LMLA [3phase]**



Wired R.C.



For ARYG24LMLA



For ARYG30/36LMLE

For ARYG45LMLA  
(Single-phase)

For ARYG36/45LMLA

### Specifications

| Model No.                               | Indoor unit                     |             | Tentative      |                 | Tentative       |                 | ARYG36LMLA      | ARYG45LMLA |
|---|---------------------------------|-------------|----------------|-----------------|-----------------|-----------------|-----------------|------------|
|   | Indoor                          | Outdoor     | ARYG24LMLA     | ARYG30LMLE      | ARYG36LMLE      | ARYG45LMLA      |                 |            |
| <b>Power Source</b>                     |                                 |             |                |                 |                 |                 |                 |            |
| Capacity                                | Cooling                         | kW          | 6.8 (0.9-8.0)  | 8.5 (2.8-10.0)  | 9.4 (2.8-11.2)  | 12.1 (4.0-13.0) | 12.1 (4.0-13.3) |            |
|   | Heating                         |             | 8.0 (0.9-9.1)  | 10.0 (2.7-11.2) | 11.2 (2.7-12.7) | 13.3 (4.2-15.2) | 13.3 (4.2-15.5) |            |
| Input Power                             | Cooling/Heating                 | kW          | 2.21/2.26      | 2.65/2.68       | 2.96/3.10       | 4.29/3.84       | 3.77/3.68       |            |
| EER                                     | Cooling                         |             | 3.08           | 3.21            | 3.18            | 2.82            | 3.21            |            |
| COP                                     | Heating                         |             | 3.54           | 3.73            | 3.61            | 3.46            | 3.61            |            |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW          | 6.8/6.0        | 8.5/8.0         | 9.4/8.7         | -               | -               |            |
| SEER                                    | Cooling                         |             | 6.20           | 5.90            | 5.70            | -               | -               |            |
| SCOP                                    | Heating                         |             | 4.00           | 3.90            | 3.80            | -               | -               |            |
| Energy Efficiency Class                 | Cooling                         |             | A++            | A+              | A+              | -               | -               |            |
|   | Heating                         |             | A+             | A               | A               | -               | -               |            |
| Max. Operating Current                  | Cooling/Heating                 | A           | 12.0/15.7*     | 17.0/17.0       | 18.5/20.0       | 23.5/23.5       | 21.0/21.0       |            |
| Annual Energy Consumption               | Cooling                         | kWh/a       | 384            | 504             | 576             | -               | -               |            |
|   | Heating                         |             | 2098           | 2868            | 3202            | -               | -               |            |
| Moisture Removal                        |                                 | l/h         | 2.5            | 2.5             | 3.0             | 4.0             | 4.0             |            |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q     | 31/29/27/25    | 39/35/30/26     | 39/35/30/26     | 42/38/32/28     | 42/38/32/28     |            |
|   | Indoor (Heating)                | H/M/L/Q     | 31/29/27/25    | 42/35/30/26     | 42/35/30/26     | 42/38/32/28     | 42/38/32/28     |            |
|   | Outdoor(Cooling/Heating)        | High        | 53*/54*        | 53/55           | 54/55           | 58/58           | 55/55           |            |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High        | 60/62          | 65/69           | 65/70           | 68/70           | -               |            |
|   | Outdoor(Cooling/Heating)        | High        | 66*/66*        | 68/69           | 69/70           | 72/70           | -               |            |
| Airflow Rate                            | Indoor / Outdoor                | High        | 1100/2850      | 1900/3600       | 1900/3800       | 4,650/4,650     | 2100/6750       |            |
| Static pressure range (Standard)        |                                 | Pa          | 30 to 150 (35) | 30 to 150 (47)  | 30 to 150 (47)  | 30 to 150 (47)  | 30 to 150 (60)  |            |
| Net Dimensions H x W x D                | Indoor                          | mm          | 270×1135×700   | 270×1135×700    | 270×1135×700    | 270×1135×700    | 270×1135×700    |            |
| Weight                                  | Outdoor                         | kg(lbs)     | 38 (84)        | 40 (88)         | 40 (88)         | 40 (88)         | 40 (88)         |            |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm          | 6.35/15.88     | 9.52/15.88      | 9.52/15.88      | 9.52/15.88      | 9.52/15.88      |            |
| Drain hose Diameter (I.D./O.D.)         |                                 | mm          | 35.7/38.1      | 35.7/38.1       | 35.7/38.1       | 35.7/38.1       | 35.7/38.1       |            |
| Max Pipe Length (Pre-Charge)            |                                 | m           | 30 (15)        | 50 (20)         | 50 (20)         | 50 (20)         | 50 (20)         |            |
| Max Height Difference                   |                                 |             | 20             | 30              | 30              | 30              | 30              |            |
| Operation Range                         | Cooling                         | °CDB        | -10 to 46      | -15 to 46       | -15 to 46       | -15 to 46       | -10 to 46       |            |
|   | Heating                         |             | -15 to 24      | -15 to 24       | -15 to 24       | -15 to 24       | -15 to 24       |            |
| Refrigerant                             | Type (Global Warming Potential) |             | R410A (2,088)  | R410A (2,088)   | R410A (2,088)   | R410A (2,088)   | R410A (2,088)   |            |
|   | Charge                          | kg(CO2eq-T) | 1.50 (3.1)     | 2.10 (4.4)      | 2.10 (4.4)      | 2.90 (6.1)      | 3.35 (7.0)      |            |

\*That specification is not fixed yet.

### Optional parts

Wired Remote Controller: UTY-RNNYM, UTY-RVNYM

Remote Sensor Unit: UTY-XSZX

Simple Remote Controller: UTY-RSNYM

Drain Pump Unit: UTZ-PX1NBA

Flange (Round): UTD-RF204


IR Receiver Kit: UTY-LRHYM

Flange (Square): UTD-SF045T

External connect kit: UTD-ECS5A


Long Life Filter: UTD-LF25NA

Wireless LAN Interface: UTY-TFNXZ1

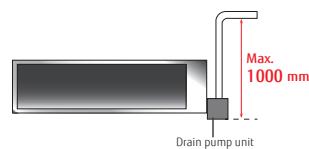


### Dimensions

(Unit : mm)

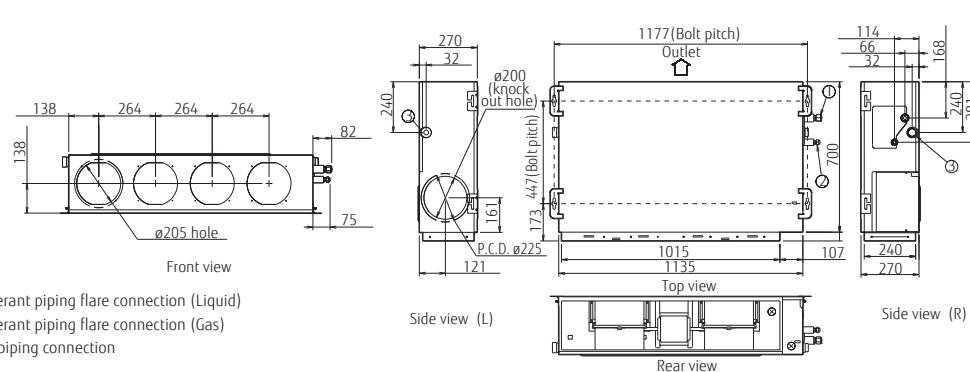

- ① Refrigerant piping flare connection (Liquid)
- ② Refrigerant piping flare connection (Gas)
- ③ Drain piping connection




## PRODUCT LINEUP: SPLIT



### High energy efficiency


Significantly greater efficiency is realized by using all DC inverter technology. (60 type)

### Design also corresponding to high static pressure

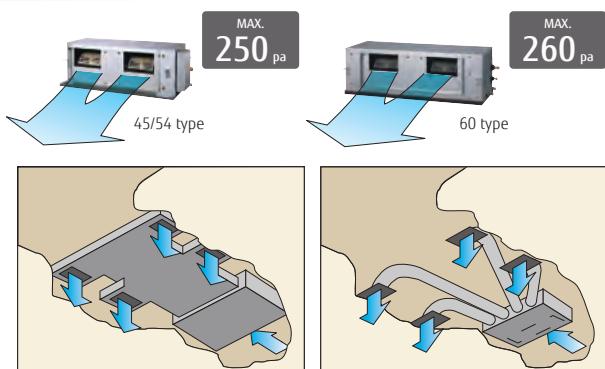


### Easy installation (Compact size & Lightweight)

A compact size and lightweight indoor unit has been developed by reducing the basic chassis and the overall material weight.

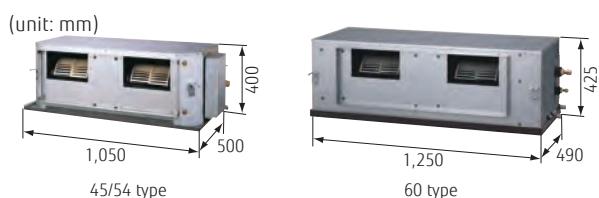


### Low noise

Cutting off the corners has enabled less turbulent airflow. Low noise is realized by adopting a plastic case and a plastic fan.

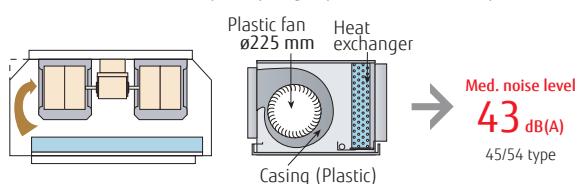

### Low ambient operation

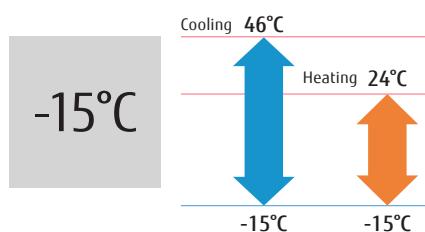

**Model : ARYG45LHTA / ARYG54LHTA /  
ARYG45LHTA [3phase] / ARYG54LHTA [3phase] / ARYG60LHTA [3phase]**



ARYG45/54LHTA



ARYG60LHTA



Wired R.C.



### Specifications


| Model No.                               | Indoor unit                     |                          | ARYG45LHTA      | ARYG54LHTA       | ARYG45LHTA       | ARYG54LHTA       | ARYG60LHTA      |
|---|---------------------------------|--------------------------|-----------------|------------------|------------------|------------------|-----------------|
|   | Outdoor unit                    | A0YG45LETL               | A0YG54LETL      | A0YG45LATT       | A0YG54LATT       | A0YG60LATT       |                 |
| Power Source                            |                                 |                          |                 |                  |                  |                  |                 |
| Capacity                                | Cooling                         | kW                       | 12.5 (4.5-14.0) | 13.4 (5.0-14.5)  | 12.5 (5.0-14.0)  | 14.0 (5.4-16.0)  | 15.0 (6.2-17.5) |
|   | Heating                         |                          | 14.0 (5.0-16.2) | 16.0 (5.5-18.0)  | 14.0 (5.4-16.2)  | 16.0 (5.8-18.0)  | 18.0 (6.2-20.0) |
| Input Power                             | Cooling/Heating                 | kW                       | 4.30/3.80       | 4.77/4.69        | 4.06/3.67        | 4.65/4.37        | 4.70/5.15       |
| EER                                     | Cooling                         | W/W                      | 2.91            | 2.81             | 3.08             | 3.01             | 3.19            |
| COP                                     | Heating                         |                          | 3.68            | 3.41             | 3.81             | 3.66             | 3.50            |
| Max. Operating Current                  | Cooling/Heating                 | A                        | 22.5/22.5       | 23.5/23.5        | 11.0/11.0        | 12.0/12.0        | 12.5/12.5       |
| Moisture Removal                        |                                 | l/h                      | 1.5             | 2.0              | 1.5              | 2.5              | 2.0             |
| Sound Pressure                          | Indoor (Cooling)                | H/M/L/Q                  | 47/43/40/-      | 47/43/40/-       | 47/43/40/-       | 47/43/40/-       | 45/40/36/-      |
|   | Indoor (Heating)                | H/M/L/Q                  | 47/43/40/-      | 47/43/40/-       | 47/43/40/-       | 47/43/40/-       | 45/40/36/-      |
|   | Outdoor(Cooling/Heating)        | High                     | 55/55           | 55/57            | 54/54            | 55/56            | 56/58           |
| Airflow Rate                            | Indoor / Outdoor                | High                     | m³/h            | 3350/6750        | 3350/6750        | 3350/6900        | 3550/6900       |
| Static pressure range (Standard)        |                                 |                          | Pa              | 100 to 250 (100) | 100 to 250 (100) | 100 to 250 (100) | 100 to 260 (60) |
| Net Dimensions H x W x D                | Indoor                          |                          | mm              | 400×1050×500     | 400×1050×500     | 400×1050×500     | 425×1250×490    |
| Weight                                  | Outdoor                         |                          | kg(lbs)         | 46 (101)         | 46 (101)         | 46 (101)         | 54 (119)        |
| Connection Pipe Diameter (Liquid / Gas) |                                 |                          | mm              | 9.52/15.88       | 9.52/15.88       | 9.52/15.88       | 9.52/15.88      |
| Drain hose Diameter (I.D./O.D.)         |                                 |                          | mm              | 23.4/25.4        | 23.4/25.4        | 23.4/25.4        | 23.4/25.4       |
| Max Pipe Length (Pre-Charge)            |                                 |                          | m               | 50 (20)          | 50 (20)          | 75 (30)          | 75 (30)         |
| Max Height Difference                   |                                 |                          | m               | 30               | 30               | 30               | 30              |
| Operation Range                         | Cooling                         |                          | °CDB            | -15 to 46        | -15 to 46        | -15 to 46        | -15 to 46       |
|   | Heating                         |                          |                 | -15 to 24        | -15 to 24        | -15 to 24        | -15 to 24       |
| Refrigerant                             | Type (Global Warming Potential) |                          |                 | R410A (2,088)    | R410A (2,088)    | R410A (2,088)    | R410A (2,088)   |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) |                 | 3.35 (7.0)       | 3.35 (7.0)       | 3.45 (7.2)       | 3.45 (7.2)      |


### Optional parts

- Wired Remote Controller: UTY-RNNYM, UTY-RVNYM
- Simple Remote Controller: UTY-RSNYM
- Long-Life Filter: UTD-LF60KA (For ARYG45/54LHTA only)
- Remote Sensor Unit: UTY-XSZX
- IR Receiver Kit: UTY-LRHYM(For ARYG60LHTA only)
- External connect kit: UTD-ECS5A, UTY-XWZXZ3
- Wireless LAN Interface: UTY-TFNXZ1

### Dimensions

(Unit : mm)

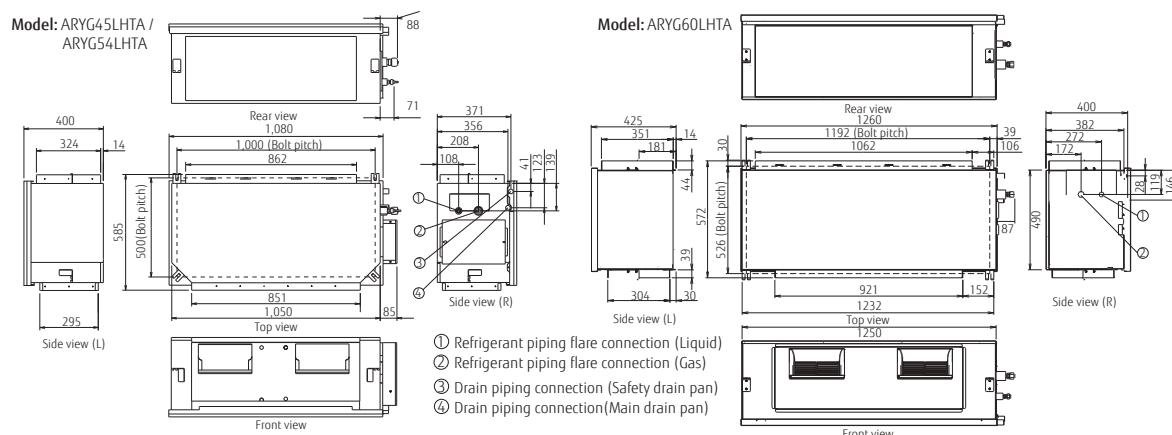



## PRODUCT LINEUP: SPLIT

### Big Duct




**ALL  
DC**



#### Separation is possible by lightweight compact design

The indoor unit can be separated into fan unit and heat-exchanger unit to assist the installation works.

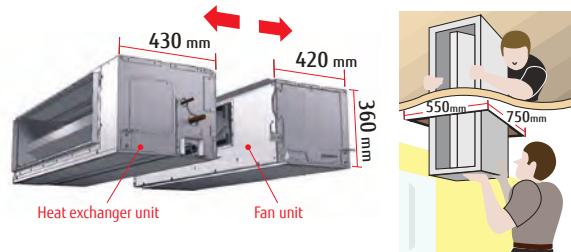


#### Automatic Airflow adjustment function

This function can set the optimum airflow automatically, so installation time is shortened drastically.



#### Quiet operation

The combination of the V-shaped heat exchanger, air stabilizer, and the high efficient DC fan motor allowed quiet operation despite of the small structural design.

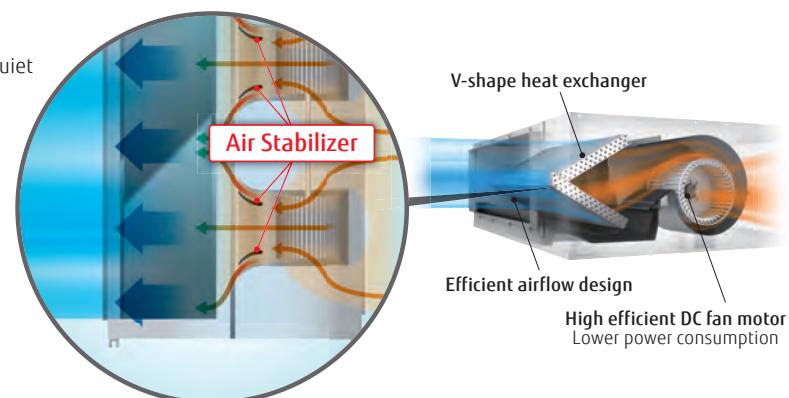

Model : ARYG72LHTA / ARYG90LHTA



Wired R.C.

**Specifications**


| Model No.                               | Indoor unit                     |                          | ARYG72LHTA                | ARYG90LHTA              |
|---|---------------------------------|--------------------------|---------------------------|-------------------------|
|   | Outdoor unit                    |                          | AOYG72LRLA                | AOYG90LRLA              |
| Power Source                            | Indoor                          |                          | Single-phase, ~230V, 50Hz |                         |
|   | Outdoor                         |                          | 3-phase, ~400V, 50Hz      |                         |
| Capacity                                | Cooling                         | kW                       | 19.0 (8.4-20.9)           | 22.0 (10.3-24.2)        |
|   | Heating                         |                          | 22.4 (7.2-24.6)           | 27.0 (8.5-29.7)         |
| Input Power                             | Cooling/Heating                 | kW                       | 6.46 / 6.59               | 7.77 / 8.18             |
|   | Cooling                         |                          | 2.94                      | 2.83                    |
| COP                                     | Cooling                         | W/W                      | 3.4                       | 3.3                     |
|   | Heating                         |                          | 4.6/4.6                   | 6.0/6.0                 |
| Max. Operating Current                  | Indoor(Cooling/Heating)         | A                        | 13.3/13.3                 | 14.6/14.6               |
|   | Outdoor(Cooling/Heating)        |                          | 4.5                       | 6.0                     |
| Moisture Removal                        |                                 | I/h                      | 46/43/41/39               | 47/44/42/40             |
| Sound Pressure                          | Indoor (Cooling)                | H/M/L/Q                  | 46/43/41/39               | 47/44/42/40             |
|   | Indoor (Heating)                | H/M/L/Q                  | 55/55                     | 55/57                   |
|   | Outdoor(Cooling/Heating)        | High                     | Pa                        | 50 to 150 (72)          |
| Airflow Rate                            | Indoor / Outdoor                | High                     | m³/h                      | 4300/8400               |
| Static pressure range (Standard)        |                                 |                          | mm                        | 360×1400×850            |
| Net Dimensions<br>H x W x D             | Indoor                          |                          | kg(lbs)                   | 69 (152)                |
|   | Outdoor                         |                          | mm                        | 1428×1080×480           |
|   |                                 |                          | kg(lbs)                   | 165 (363)               |
| Weight                                  |                                 |                          |                           | 80 (176)      174 (383) |
| Connection Pipe Diameter (Liquid / Gas) |                                 |                          | mm                        | 12.7/25.4               |
| Drain Hose Diameter (I.D./O.D.)         |                                 |                          | mm                        | 23.4/25.4               |
| Max Pipe Length (Pre-Charge)            |                                 |                          | m                         | 100 (30)                |
| Height Difference                       |                                 |                          |                           | 30                      |
| Operation Range                         | Cooling                         | °CDB                     | -15 to 46                 | -15 to 46               |
|   | Heating                         |                          | -20 to 24                 | -20 to 24               |
| Refrigerant                             | Type (Global Warming Potential) |                          | R410A (2,088)             | R410A (2,088)           |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) | 5.6 (11.7)                | 7.1 (14.8)              |


**Optional parts**

- Wired Remote Controller: UTY-RNRYZ2, UTY-RLRY, UTY-RVNYM, UTY-RNNYM  
 Simple Remote Controller: UTY-RSRY, UTY-RHRY, UTY-RSNYN  
 IR Receiver Unit: UTY-LBTYM  
 Remote Sensor Unit: UTY-XSZX  
 External Connect Kit: UTY-XWZXZG
- External Input and Output PCB: UTY-XCSX  
 Drain Pump Unit: UTZ-PX1NAB  
 Long Life filter: UTD-LFKA  
 Wireless LAN Interface: UTY-TFSXZ1

**Dimensions**

(Unit : mm)

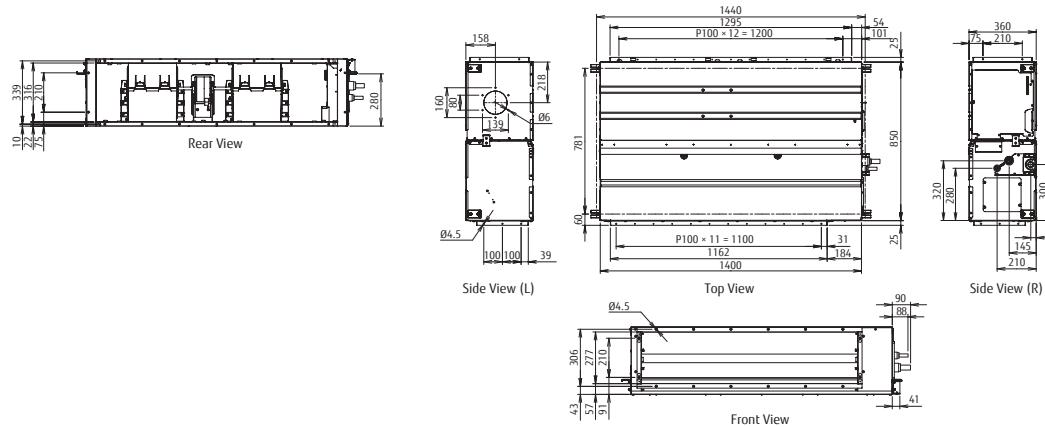




## PRODUCT LINEUP: SPLIT




### 2-Fan & Wide airflow

Individual vertical airflow by 2-fan can control the whole room comfortably.

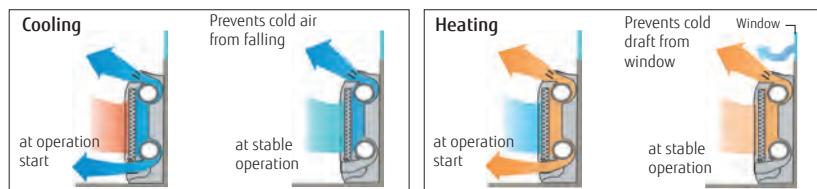


### Flexible & easy installation

Due to compact and whole surface suction method model, floor, concealed, half concealed, or wall mounted installation can be available to match the room layout.

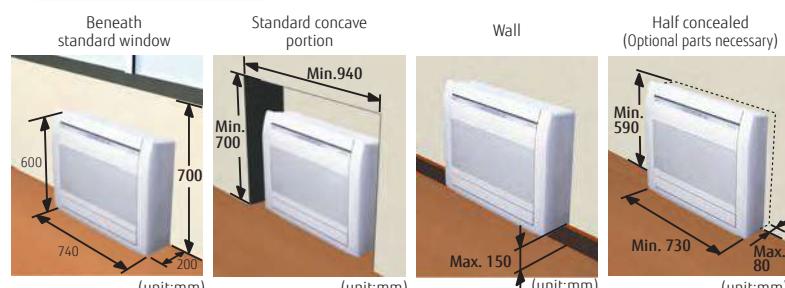


### Flexible piping connection 6 direction of drain & piping

Drain hose and piping can be drawn flexibly in the right, left, side, and down directions

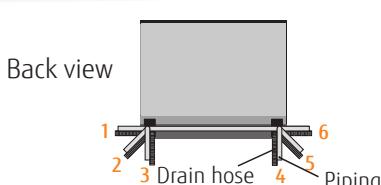


### 10°C HEAT Operation

The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied

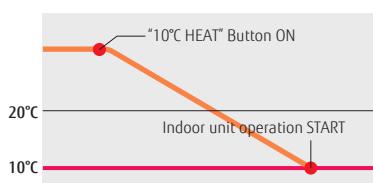

### Low ambient operation

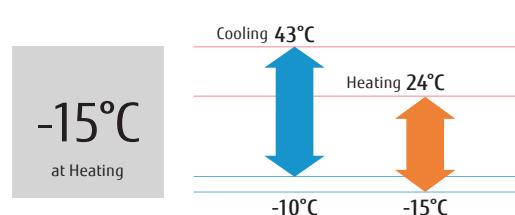

**Model: AGYG09LVCA / AGYG12LVCA / AGYG14LVCA**

Wireless R.C.



For AGYG09/12LVCA



For AGYG14LVCA

**Specifications**

| Model No.                               | Indoor unit                     |             | AGYG09LVCA        | AGYG12LVCA        | AGYG14LVCA                |  |
|---|---------------------------------|-------------|-------------------|-------------------|---------------------------|--|
|   | Outdoor unit                    |             | AOYG09LVCA        | AOYG12LVCA        | AOYG14LVLA                |  |
| Power Source                            |                                 |             |                   |                   | Single-phase, ~230V, 50Hz |  |
| Capacity                                | Cooling                         | kW          | 2.6 (0.9-3.5)     | 3.5 (0.9-4.0)     | 4.2 (0.9-5.0)             |  |
|   | Heating                         |             | 3.5 (0.9-5.5)     | 4.5 (0.9-6.6)     | 5.2 (0.9-8.0)             |  |
| Input Power                             | Cooling/Heating                 | kW          | 0.53/0.79         | 0.94/1.19         | 1.14/1.44                 |  |
| EER                                     | Cooling                         | W/W         | 4.91              | 3.72              | 3.68                      |  |
| COP                                     | Heating                         |             | 4.43              | 3.78              | 3.61                      |  |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW          | 2.6/2.9           | 3.5/3.8           | 4.2/4.7                   |  |
| SEER                                    | Cooling                         | W/W         | 7.00              | 6.50              | 6.40                      |  |
| SCOP                                    | Heating (Average)               |             | 4.20              | 4.00              | 4.00                      |  |
| Energy Efficiency Class                 | Cooling                         |             | A++               | A++               | A++                       |  |
|   | Heating (Average)               |             | A+                | A+                | A+                        |  |
| Max. Operating Current                  | Cooling/Heating                 | A           | 7.0/10.0          | 7.0/10.0          | 9.0/13.5                  |  |
| Annual Energy Consumption               | Cooling                         | kWh/a       | 130               | 188               | 230                       |  |
|   | Heating                         |             | 967               | 1330              | 1645                      |  |
| Moisture Removal                        |                                 | l/h         | 1.3               | 1.8               | 2.1                       |  |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q     | 40/35/29/22       | 40/35/29/22       | 44/38/31/22               |  |
|   | Indoor (Heating)                | H/M/L/Q     | 40/35/29/22       | 40/35/29/22       | 43/37/29/22               |  |
|   | Outdoor(Cooling/Heating)        | High        | 47/48             | 48/49             | 50/50                     |  |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High        | 55/56             | 55/56             | 58/58                     |  |
|   | Outdoor(Cooling/Heating)        | High        | 64/65             | 64/65             | 65/66                     |  |
| Airflow Rate                            | Indoor / Outdoor                | High        | m³/h              | 570/1680          | 570/1680                  |  |
| Net Dimensions H x W x D                | Indoor                          | mm          | 600×740×200       | 600×740×200       | 600×740×200               |  |
|   |                                 | kg(lbs)     | 14 (31)           | 14 (31)           | 14 (31)                   |  |
|   |                                 | mm          | 540×790×290       | 540×790×290       | 578×790×300               |  |
| Weight                                  | Outdoor                         | kg(lbs)     | 36 (79)           | 36 (79)           | 40 (88)                   |  |
|   |                                 | mm          | 6.35/9.52         | 6.35/9.52         | 6.35/12.7                 |  |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm          | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7         |  |
| Drain hose Diameter (I.D./O.D.)         |                                 | m           | 20 (15)           | 20 (15)           | 20 (15)                   |  |
| Max Pipe Length (Pre-Charge)            |                                 | m           | 15                | 15                | 15                        |  |
| Max Height Difference                   |                                 | °CDB        | -10 to 43         | -10 to 43         | -10 to 43                 |  |
| Operation Range                         | Cooling                         | °CDB        | -15 to 24         | -15 to 24         | -15 to 24                 |  |
|   | Heating                         |             | R410A (2,088)     | R410A (2,088)     | R410A (2,088)             |  |
| Refrigerant                             | Type (Global Warming Potential) |             | 1.05 (2.2)        | 1.05 (2.2)        | 1.15 (2.4)                |  |
|   | Charge                          | kg(CO2eq-T) |                   |                   |                           |  |

**Optional parts**

Wired Remote Controller: UTY-RNNYM, UTY-RVNYM


Simple Remote Controller: UTY-RSNYM

Half Concealed Kit: UTR-STA

Wireless LAN Interface: UTY-TFNXZ1

**Dimensions**

(Unit : mm)

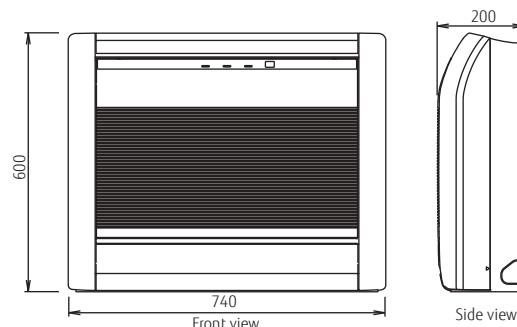



## PRODUCT LINEUP: SPLIT



### Flexible installation

#### Example for floor installation

Floor console




#### Example for ceiling installation

Under ceiling




### Double auto swing

A combination of right/left and up/down directional swing allows 3-dimensional air direction control

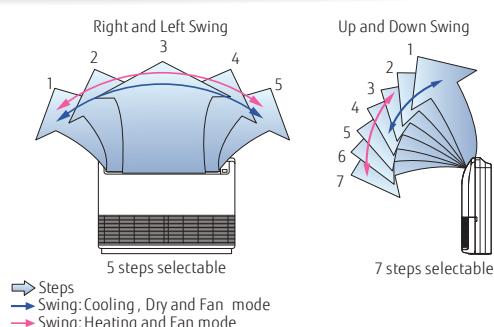


### High power DC fan motor

- High power
- Wide rotation range
- High efficiency

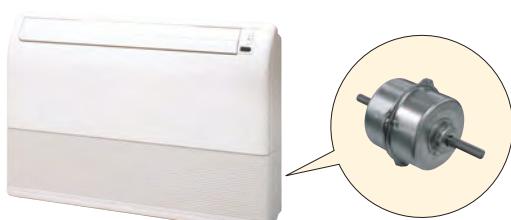

### Low ambient operation

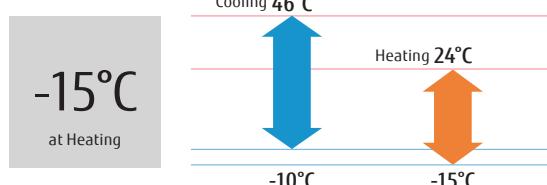

**Model : ABYG18LVTB / ABYG24LVTA**

Wireless R.C.



For ABYG18LVTB

For ABYG24LVTA

**Specifications**

|   |                                 |         | Tentative                 |               |  |
|---|---------------------------------|---------|---------------------------|---------------|--|
| Model No.                               | Indoor unit                     |         | ABYG18LVTB                | ABYG24LVTA    |  |
|   | Outdoor unit                    |         | AOYG18LBCB                | AOYG24LBCB    |  |
| Power Source                            |                                 |         | Single-phase, ~230V, 50Hz |               |  |
| Capacity                                | Cooling                         | kW      | 5.2 (0.9-5.9)             | 6.8 (0.9-8.0) |  |
|   | Heating                         |         | 6.0 (0.9-7.5)             | 8.0 (0.9-9.1) |  |
| Input Power                             | Cooling/Heating                 | kW      | 1.62/1.66                 | 2.21/2.26     |  |
|   | Cooling                         |         | 3.21                      | 3.08          |  |
| COP                                     | Heating                         | W/W     | 3.61                      | 3.54          |  |
|   | Cooling/Heating(-10°C)          |         | 5.2/5.2                   | 6.8/6.0       |  |
| Pdesign                                 | Cooling                         | kW      | 6.10                      | 5.60          |  |
|   | Heating (Average)               |         | 4.00                      | 3.90          |  |
| Energy Efficiency Class                 | Cooling                         | W/W     | A++                       | A+            |  |
|   | Heating (Average)               |         | A+                        | A             |  |
| Max. Operating Current                  | Cooling/Heating                 | A       | 9.0/14.5*                 | 12.0/15.7*    |  |
|   | Cooling                         |         | 298                       | 425           |  |
| Annual Energy Consumption               | Heating                         | kWh/a   | 1819                      | 2150          |  |
|   |                                 |         | 2.0                       | 2.7           |  |
| Moisture Removal                        | Indoor (Cooling)                | H/M/L/Q | 43/40/34/31               | 48/44/40/35   |  |
|   | Indoor (Heating)                |         | 43/40/34/31               | 48/44/40/35   |  |
| Sound Pressure Level                    | Outdoor(Cooling/Heating)        | High    | 50/50                     | 53*/54*       |  |
|   | Indoor(Cooling/Heating)         |         | 57/57                     | 61/61         |  |
| Sound Power Level                       | Outdoor(Cooling/Heating)        |         | 62/65                     | 66*/66*       |  |
|   | Indoor / Outdoor                | High    | 780*/2380                 | 980*/2850*    |  |
| Airflow Rate                            | Indoor                          |         | 199*×990*×655*            | 199×990×655   |  |
|   | Outdoor                         |         | kg(lbs)                   | 27 (59)       |  |
| Net Dimensions H x W x D                | Indoor                          |         | mm                        | 632×799×290   |  |
|   | Outdoor                         |         | mm                        | 714*×820*×315 |  |
| Weight                                  | Indoor                          |         | kg(lbs)                   | 36 (79)       |  |
|   | Outdoor                         |         | mm                        | 42 (93)       |  |
| Connection Pipe Diameter (Liquid / Gas) |                                 |         | 6.35/12.70                | 6.35/15.88    |  |
| Drain hose Diameter (I.D.O.D.)          |                                 |         | 25/32                     | 25/32         |  |
| Max Pipe Length (Pre-Charge)            |                                 |         | m                         | 25 (15)       |  |
| Max Height Difference                   |                                 |         | m                         | 15            |  |
| Operation Range                         | Cooling                         | °CDB    | -10 to 46                 | -10 to 46     |  |
|   | Heating                         |         | -15 to 24                 | -15 to 24     |  |
| Refrigerant                             | Type (Global Warming Potential) |         | R410A (2,088)             | R410A (2,088) |  |
|   | Charge                          |         | kg(CO2eq-T)               | 1.20 (2.5)    |  |
| *:That specification is not fixed yet.  |                                 |         |                           |               |  |

**Optional parts**


Wired Remote Controller: UTY-RNNYM, UTY-RVNYM

Simple Remote Controller: UTY-RSNYM

Wireless LAN Interface: UTY-TFNXZ1

**Dimensions**

(Unit : mm)

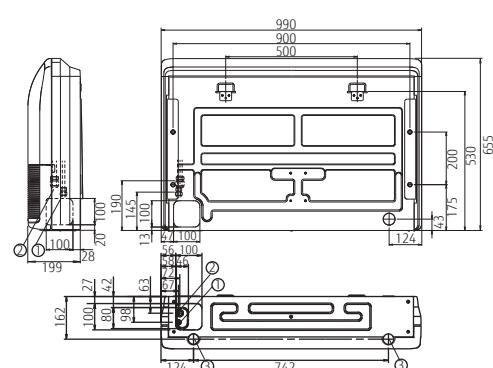

- ① Refrigerant piping flare connection (Liquid)
- ② Refrigerant piping flare connection (Gas)
- ③ Drain piping connection




## PRODUCT LINEUP: SPLIT




### Flexible installation

Various installations are possible to match the room layout.

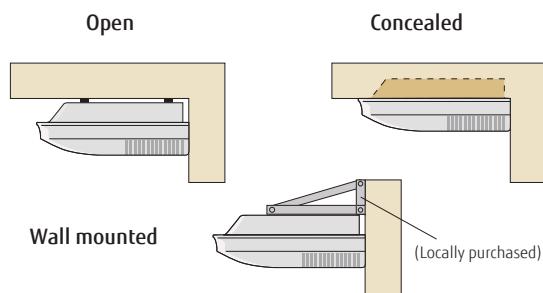


### Multi auto swing


A combination of right/left and up/down directional swing allows 3-dimensional air direction control.

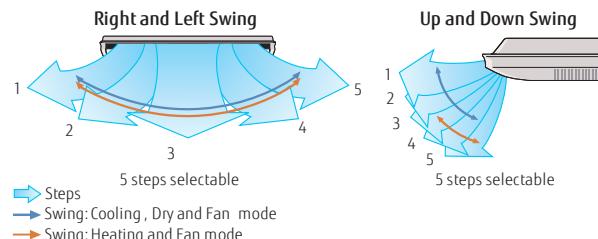

### Fresh air intake

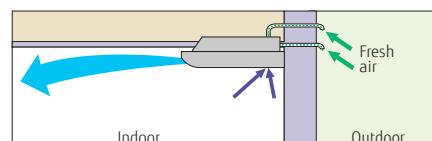

### Low ambient operation

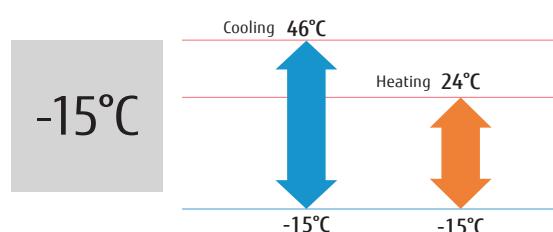

**Model : ABYG30LRTE / ABYG36LRTE / ABYG45LRTA /  
ABYG36LRTA [3phase] / ABYG45LRTA [3phase] / ABYG54LRTA [3phase]**



Wireless R.C.



For ABYG30/36LRTA

For ABYG45LRTA  
(Single-phase)


For ABYG36/45/54LRTA

### Specifications

| Model No.                               | Indoor unit                     |                          | Tentative       |                 |                 |
|---|---------------------------------|--------------------------|-----------------|-----------------|-----------------|
|   | Outdoor unit                    | AOYG30LETL               | ABYG36LRTA      | ABYG45LRTA      | ABYG45LRTA      |
| Power Source                            | Single-phase, ~230V, 50Hz       |                          |                 |                 |                 |
| Capacity                                | Cooling                         | kW                       | 8.5 (2.8-10.0)  | 9.4 (2.8-11.2)  | 12.1 (4.0-13.0) |
|   | Heating                         |                          | 10.0 (2.7-11.2) | 11.2 (2.7-12.7) | 13.3 (4.2-15.2) |
| Input Power                             | Cooling/Heating                 | kW                       | 2.65/2.77       | 2.93/3.02       | 4.29/3.84       |
| EER                                     | Cooling                         |                          | 3.21            | 3.21            | 2.82            |
| COP                                     | Heating                         |                          | 3.61            | 3.71            | 3.46            |
| Pdesign                                 | Cooling/Heating(-10°C)          | kW                       | 8.5/8.0         | 9.4/8.7         | -               |
| SEER                                    | Cooling                         |                          | 6.10            | 6.00            | -               |
| SCOP                                    | Heating                         |                          | 4.20            | 4.10            | -               |
| Energy Efficiency Class                 | Cooling                         |                          | A++             | A+              | -               |
|   | Heating                         |                          | A+              | A+              | -               |
| Max. Operating Current                  | Cooling/Heating                 | A                        | 17.0/17.0       | 18.5/20.0       | 23.5/23.5       |
| Annual Energy Consumption               | Cooling                         | kWh/a                    | 487             | 548             | -               |
|   | Heating                         |                          | 2662            | 2965            | -               |
| Moisture Removal                        |                                 | l/h                      | 2.5             | 3.0             | 4.0             |
| Sound Pressure Level                    | Indoor (Cooling)                | H/M/L/Q                  | 45/43/37/32     | 47/43/37/32     | 49/45/39/34     |
|   | Indoor (Heating)                | H/M/L/Q                  | 45/43/37/32     | 47/43/37/32     | 49/45/39/34     |
|   | Outdoor(Cooling/Heating)        | High                     | 53/55           | 54/55           | 58/58           |
| Sound Power Level                       | Indoor(Cooling/Heating)         | High                     | 57/60           | 60/61           | 65/63           |
|   | Outdoor(Cooling/Heating)        | High                     | 68/69           | 69/70           | 72/72           |
| Airflow Rate                            | Indoor / Outdoor                | High                     | 1660/3600       | 1900/3800       | 4650/4650       |
| Net Dimensions H x W x D                | Indoor                          | mm                       | 240×1660×700    | 240×1660×700    | 240×1660×700    |
| Weight                                  | Outdoor                         | kg(lbs)                  | 46 (101)        | 46 (101)        | 46 (101)        |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm                       | 830×900×330     | 830×900×330     | 914×970×370     |
| Drain port Diameter (I.D./O.D.)         |                                 | mm                       | 9.52/15.88      | 9.52/15.88      | 9.52/15.88      |
| Max Pipe Length (Pre-Charge)            |                                 | m                        | 22.0/25.6       | 22.0/25.6       | 22.0/25.6       |
| Max Height Difference                   |                                 | m                        | 50 (20)         | 50 (20)         | 50 (20)         |
| Operation Range                         | Cooling                         | °CDB                     | -15 to 46       | -15 to 46       | -15 to 46       |
|   | Heating                         |                          | -15 to 24       | -15 to 24       | -15 to 24       |
| Refrigerant                             | Type (Global Warming Potential) |                          | R410A (2,088)   | R410A (2,088)   | R410A (2,088)   |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) | 2.10 (4.4)      | 2.10 (4.4)      | 2.90 (6.1)      |
|   |                                 |                          |                 | 3.35 (7.0)      | 3.45 (7.2)      |
|   |                                 |                          |                 |                 | 3.45 (7.2)      |


### Optional parts

- Wired Remote Controller: UTY-RNNYM, UTY-RVNYM
- Simple Remote Controller: UTY-RSNYM
- Drain Pump Unit: UTR-DPB24T
- Flange: UTD-RF204

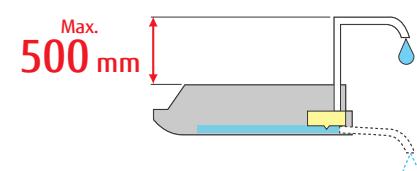


### Dimensions

(Unit : mm)

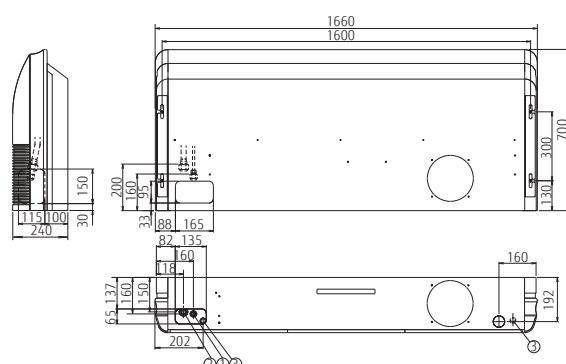

- ① Refrigerant piping flare connection (Liquid)
- ② Refrigerant piping flare connection (Gas)
- ③ Drain piping connection




## PRODUCT LINEUP: MULTI SPLIT



### Wide range of indoor units with various models

7 types 26 models are lined up in the capacity range from 2 kW to 7 kW class. Wide range of needs can be met from rooms of private homes to large shops and hotels.

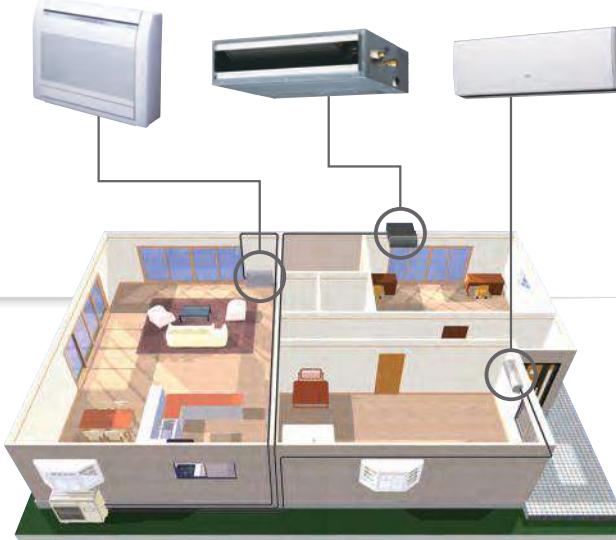


### Space-saving installation

Multiple indoor units can be connected to 1 outdoor unit, and long piping connection is also possible. Compared with single type, the outdoor unit can be installed in various places to realize the space-saving installation.

### Flexible installation

Up to max. piping length of 70 m (AOYG30LAT4), max. height difference of 15 m can be supported. Multi type can be installed in large-size residence or buildings with multiple floors.

**Max. Piping Length (Each Unit):**  
20 m (AOYG14LAC2 / 18LAC2),  
25 m (AOYG18LAT3 / 24LAT3 / 30LAT4)



**Max. Height:**  
15 m (AOYG14LAC2/18LAC2/18LAT3/24L  
AT3/30LAT4)



**Total Piping Length:**  
30 m (AOYG14LAC2 / 18LAC2),  
50 m (AOYG18LAT3 / 24LAT3),  
70 m (AOYG30LAT4)

2 Rooms: AOYG14LAC2 / AOYG18LAC2  
 3 Rooms: AOYG18LAT3 / AOYG24LAT3  
 4 Rooms: AOYG30LAT4



#### Specifications (2 ROOMS, 3 ROOMS, 4 ROOMS)


| Model No.                   | Outdoor unit                                |                          | AOYG14LAC2    | AOYG18LAC2              | AOYG18LAT3                  | AOYG24LAT3                  | AOYG30LAT4  |
|-----------------------------|---|--------------------------|---------------|-------------------------|-----------------------------|-----------------------------|---|
| Power Source                | Single-phase, ~230V, 50Hz                   |                          |               |                         |                             |                             |   |
| Rated Capacity (min-max)    | Cooling                                     | kW                       | 4.0 (1.4-4.4) | 5.0 (1.7-5.6)           | 5.4 (1.8-6.8)               | 6.8 (1.8-8.5)               | 8.0 (3.5-10.1)  |
|                             | Heating                                     |                          | 4.4 (1.1-5.4) | 5.6 (1.8-6.1)           | 6.8 (2.0-8.0)               | 8.0 (2.0-8.8)               | 9.6 (3.7-12.0)  |
| EER                         | Cooling                                     | W/W                      | 3.67          | 3.21                    | 4.00                        | 3.51                        | 3.60  |
|                             | Heating                                     |                          | 4.27          | 3.97                    | 4.20                        | 4.00                        | 4.00  |
| COP                         | Cooling                                     | dB(A)                    | 47            | 50                      | 46                          | 48                          | 50  |
|                             | Heating                                     |                          | 49            | 51                      | 47                          | 49                          | 51  |
| Sound Pressure Level (High) | Cooling                                     |                          | 61            | 63                      | 65                          | 68                          | 68  |
|                             | Heating                                     |                          | 63            | 64                      | 67                          | 70                          | 70  |
| Net Dimensions H x W x D    |   | mm                       | 540x790x290   | 540x790x290             | 700x900x330                 | 700x900x330                 | 830x900x330   |
| Weight                      |   | kg(lbs)                  | 37 (82)       | 38 (84)                 | 55 (121)                    | 55 (121)                    | 68 (150)  |
| Connection Pipe Diameter    | Liquid                                      | mm                       | 6.35x2        | 6.35x2                  | 6.35x3                      | 6.35x3                      | 6.35x4 (*6.35x3, 9.52)  |
|                             | Gas   |                          | 9.52 x 2      | 9.52 x 2 * (9.52, 12.7) | 9.52 x 2, 12.7 * (9.52 x 3) | 9.52 x 2, 12.7 * (9.52 x 3) | 9.52 x 2, 12.7, 12.7 * (9.52 x 3, 12.7) * (9.52 x 2, 12.7, 15.88) |
| Max. Pipe Length            |   | Total / Each             | 30 / 20       | 30 / 20                 | 50 / 25                     | 50 / 25                     | 70 / 25   |
| Max. Height Difference      | Between Outdoor Unit and Each Indoor Units. | m                        | 15            | 15                      | 15                          | 15                          | 15  |
|                             | Between Indoor Units.                       |                          | 10            | 10                      | 10                          | 10                          | 10  |
| Operation Range             | Cooling                                     | °CDB                     | 10 to 46      | 10 to 46                | -10 to 46                   | -10 to 46                   | 0 to 46   |
|                             | Heating                                     |                          | -15 to 24     | -15 to 24               | -15 to 24                   | -15 to 24                   | -10 to 24   |
| Refrigerant                 | Type (Global Warming Potential)             | kg(CO <sub>2</sub> eq-T) | R410A (2,088) | R410A (2,088)           | R410A (2,088)               | R410A (2,088)               | R410A (2,088)   |
|                             | Charge                                      |                          | 1.25 (2.6)    | 1.30 (2.7)              | 2.20 (4.6)                  | 2.20 (4.6)                  | 3.30 (6.9)  |

\* Connect to connection valve by the adapter.


#### Dimensions

(Unit : mm)


**2 Rooms:**  
AOYG14LAC2/AOYG18LAC2

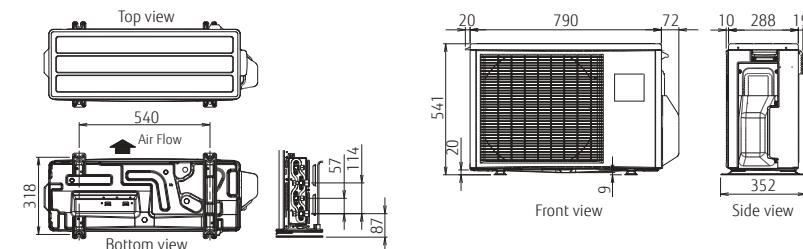


**3 Rooms:**  
AOYG18LAT3/AOYG24LAT3

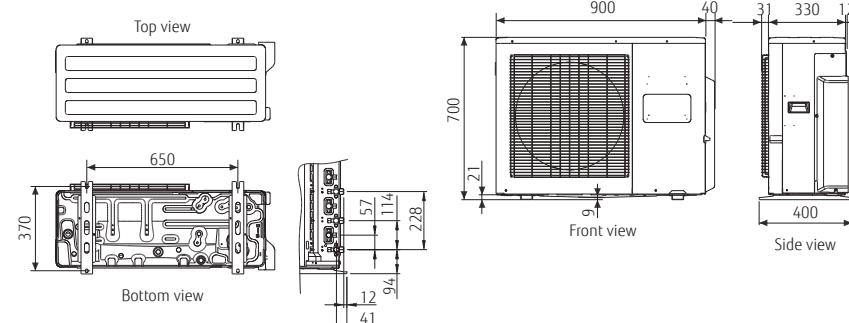

**4 Rooms:**  
AOYG30LAT4

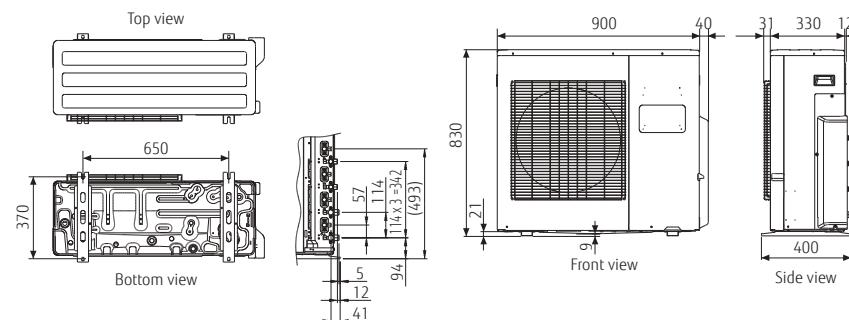




## PRODUCT LINEUP: MULTI SPLIT


### 5-6 Rooms Multi

ALL  
DC

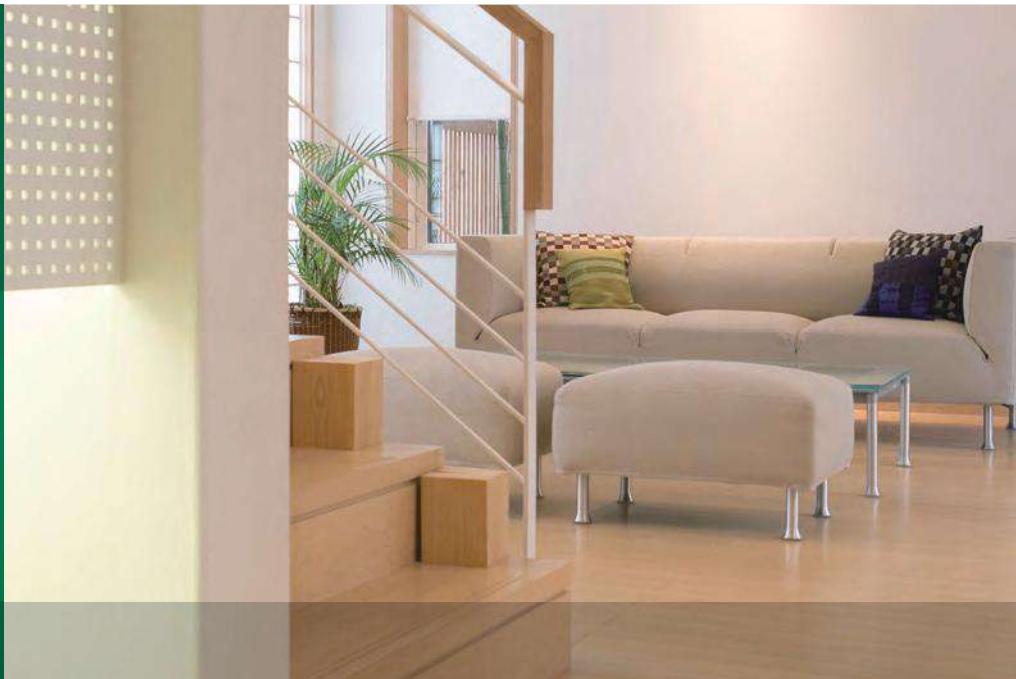

#### Wide range of indoor units with various models

6 types 26 models are lined up in the capacity range from 2 kW to 7 kW class. Wide range of needs can be met from rooms of private homes to large shops and hotels.

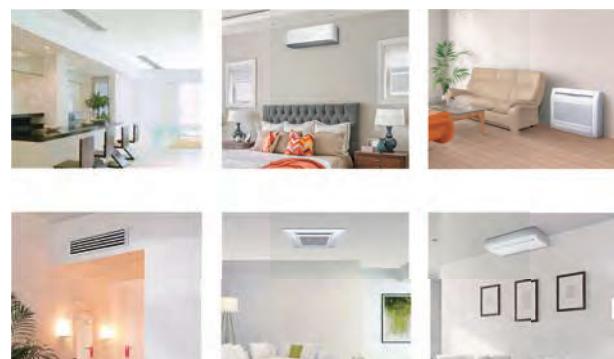

#### Compact design

Multiple indoor units can be connected to 1 outdoor unit, and long piping connection is also possible. Compared with single type, the outdoor unit can be installed in various places to realize the space-saving installation.



#### Easy installation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once



#### Central & Individual Control

- Batched control of up to 8 indoor units. The temperature, airflow volume, and remote control prohibition settings of all indoor units can be batched.
- Corresponds to 9 different languages (English, German, French, Spanish, Russian, Portuguese, Italian, Greek, and Turkish)
- Large backlight LED screen
- Large easy-to-see operation panel

Max. Controllable  
**1 multi system**

Max. Controllable  
**6 indoor units**



5 Rooms: AOYG36LBLA5  
6 Rooms: AOYG45LBLA6




### Specifications (5 ROOMS, 6 ROOMS)


| Model No.                   | Outdoor unit                                |         | AOYG36LBLA5               | AOYG45LBLA6        |
|-----------------------------|---|---------|---------------------------|--------------------|
| Power Source                |   |         | Single-phase, ~230V, 50Hz |                    |
| Rated Capacity (min-max)    | Cooling                                     | kW      | 10.0 (3.5-12.5)           | 12.5 (3.5-14.0)    |
|                             | Heating                                     |         | 12.0 (3.5-14.0)           | 13.5 (3.5-16.0)    |
| EER                         | Cooling                                     | W/W     | 4.10                      | 3.50               |
|                             | Heating                                     |         | 4.30                      | 4.00               |
| COP                         | Cooling                                     | dB(A)   | 53                        | 53                 |
|                             | Heating                                     |         | 55                        | 55                 |
| Sound Pressure Level (High) | Cooling                                     |         | 67                        | 67                 |
|                             | Heating                                     |         | 68                        | 68                 |
| Net Dimensions H x W x D    |   | mm      | 998x970x370               | 998x970x370        |
| Weight                      |   | kg(lbs) | 94 (207)                  | 94 (207)           |
| Connection Pipe Diameter    | Liquid                                      | mm      | 6.35x5                    | 6.35x6             |
|                             | Gas   |         | 9.52 x 3, 12.7 x 2        | 9.52 x 4, 12.7 x 2 |
| Max. Pipe Length            | Total / Each                                | m       | 80 / 25                   | 80 / 25            |
| Max. Height Difference      | Between Outdoor Unit and Each Indoor Units. |         | 15                        | 15                 |
|                             | Between Indoor Units.                       |         | 10                        | 10                 |
| Operation Range             | Cooling                                     | °CDB    | -10 to 46                 | -10 to 46          |
|                             | Heating                                     |         | -15 to 24                 | -15 to 24          |
| Refrigerant                 | Type (Global Warming Potential)             |         | R410A (2,088)             | R410A (2,088)      |
|                             | Charge                                      |         | 4.00 (8.4)                | 4.00 (8.4)         |

### Dimensions


(Unit : mm)

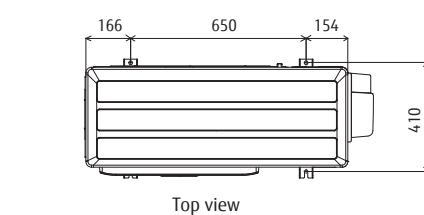


Top view

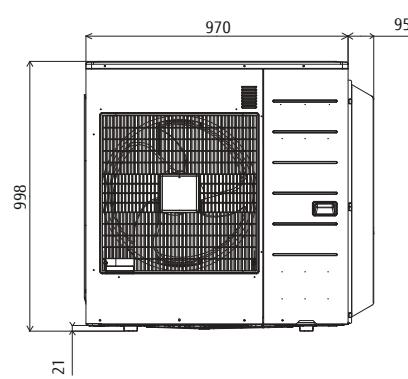

Front view

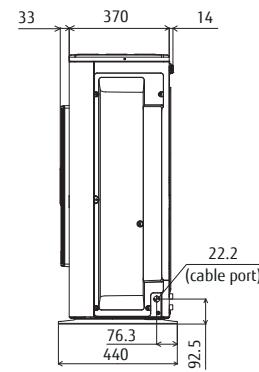

Side view

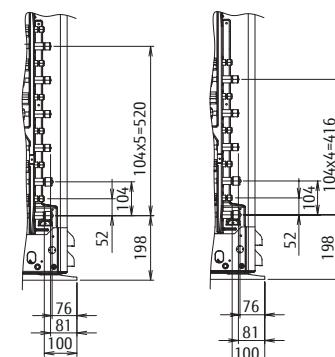



## PRODUCT LINEUP: MULTI SPLIT

### 8 Rooms Multi




#### Compact outdoor unit

The compact design outdoor unit allows to be installed below a window and in a narrow space.



#### High seasonal efficiency

The actual performance is conducted under various outside temperatures depending on weather and seasons, furthermore, especially for multi system, not all the rooms are operated all the time. So over 90% of actual operation time, air conditioners are operated at partial capacity instead of rated capacity. Considering these, we focused on energy-saving performance which is based on actual use. Efficiency of part load performance was drastically improved by developing ALL DC and our own inverter system.

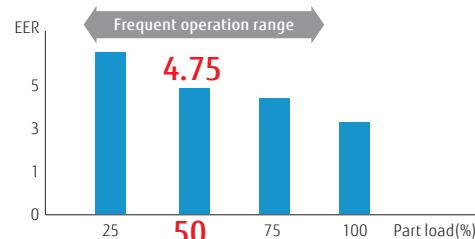

#### Innovated technology



**High efficiency large fan:**  
New high efficiency fan is mounted.



**DC fan motor:**  
High performance and high efficiency has been realized by using a small DC fan motor.




**Heat exchanger:**  
Reduced compact size and energy saving has been realized by utilizing high density piping design and 3-Row heat exchanger.



**High efficiency DC twin rotary compressor:**  
A high performance, low noise, large capacity DC twin rotary compressor is used.

#### Quick comfort by optimized refrigerant control

Every room meets the set point most quickly and comfortably by optimized refrigerant control.

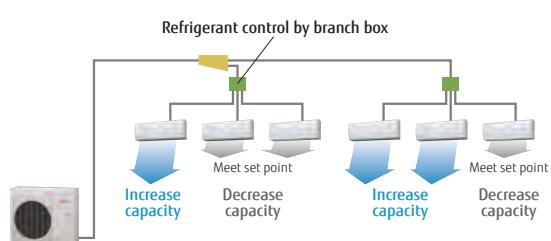

**8 Rooms: AOYG45LBT8****Branch Box: UTP-PY03A / UTP-PY02A****Specifications**




| Model Name                              |                                 |                          | AOYG45LBT8                   |
|---|---------------------------------|--------------------------|------------------------------|
| Maximum Connectable Indoor Unit         |                                 |                          | 8                            |
| Indoor Unit Connectable Capacity        | Cooling                         | kW                       | 11.0 - 17.5                  |
| Power source                            |                                 |                          | Single-phase, ~230V, 50Hz    |
| Rated Capacity                          | Cooling                         | kW                       | 14.0                         |
|   | Heating                         |                          | 16.0                         |
| Input Power                             | Cooling                         | kW                       | 5.20                         |
|   | Heating                         |                          | 5.07                         |
| Airflow rate                            | Cooling                         | m³/h                     | 4,650                        |
|   | Heating                         |                          | 4,800                        |
| Sound Pressure Level                    | Cooling                         | dB(A)                    | 56                           |
|   | Heating                         |                          | 58                           |
| Heat Exchanger Fin                      |                                 |                          | Plate fin coil               |
| Net Dimensions H × W × D                | mm                              |                          | 914×970×370                  |
| Weight                                  | kg(lbs)                         |                          | 98 (217)                     |
| Connection Pipe Diameter (Liquid / Gas) |                                 |                          | 9.52/15.88                   |
| Max Pipe Length                         |                                 |                          | 115 (Total)                  |
| Max Height Difference (O.U ~ I.U)       |                                 | m                        | 30                           |
| Operating Range                         | Cooling                         | °CDB                     | -5 to 46                     |
|   | Heating                         |                          | -15 to 24                    |
| Refrigerant                             | Type (Global Warming Potential) |                          | R410A (2,088)                |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) | 3.45 (7.2)                   |
| Model Name                              |                                 |                          | UTP-PY03A                    |
| Connectable Indoor Unit                 |                                 |                          | 1 to 3 Units                 |
| Power source                            |                                 |                          | Single-phase, ~230V, 50Hz    |
| Available Voltage Range                 |                                 |                          | 198-264V                     |
| Power Consumption                       | W                               |                          | 10                           |
| Running Current                         | A                               |                          | 0.05                         |
| Net Dimensions H × W × D                | mm                              |                          | 195×433×370                  |
| Weight                                  | kg(lbs)                         |                          | 9 (20)                       |
| Connection pipe diameter                | Liquid                          | °CDB                     | Main: 9.52×1, Branch:6.35×3  |
|   | Gas                             |                          | Main: 15.88×1, Branch:12.7×3 |
|   | Method                          |                          | Flare                        |
| Model Name                              |                                 |                          | UTP-PY02A                    |
| Connectable Indoor Unit                 |                                 |                          | 1 to 2 Units                 |
| Power source                            |                                 |                          | Single-phase, ~230V, 50Hz    |
| Available Voltage Range                 |                                 |                          | 198-264V                     |
| Power Consumption                       | W                               |                          | 10                           |
| Running Current                         | A                               |                          | 0.05                         |
| Net Dimensions H × W × D                | mm                              |                          | 195×433×370                  |
| Weight                                  | kg(lbs)                         |                          | 9 (20)                       |
| Connection pipe diameter                | Liquid                          | °CDB                     | Main: 9.52×1, Branch:6.35×2  |
|   | Gas                             |                          | Main: 15.88×1, Branch:12.7×2 |
|   | Method                          |                          | Flare                        |

Note: Specifications are based on the following conditions.

- In case of connecting two indoor units(7 kW class).
- These are the measured values in the manufacturer's anechoic chamber.
- Cooling: Indoor temp. of 27°CDB/19°CWB, outdoor temp. of 35°CDB/24°CWB Heating: Indoor temp. of 20°CDB/15°CWB, outdoor temp. of 7°CDB/6°CWB  
Pipe length: 5 m (Outdoor unit - Branch box), 3 m (Branch box - Indoor unit) Height difference : 0 m

**Dimensions**

(Unit : mm)

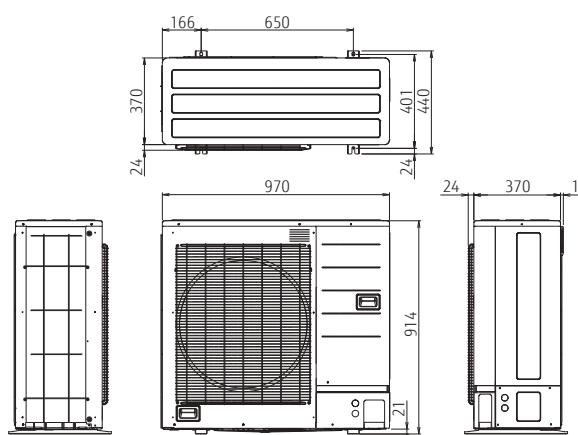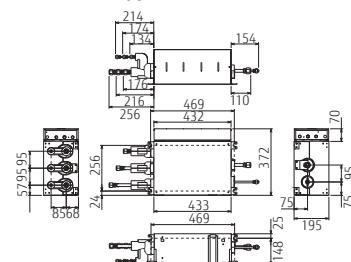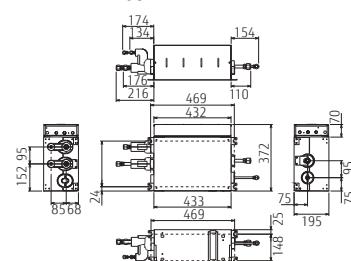**Outdoor Unit:  
AOYG45LBT8****Branch Box:  
UTP-PY03A (3 branches type)****Branch Box:  
UTP-PY02A (2 branches type)**




## PRODUCT LINEUP: MULTI SPLIT




Can support various installation scenes from office to commercial space by same place multi connection of up to 3 units.

Indoor units distributed layout according to the shape and number of people and lighting conditions of the room.  
Ideal comfortable air flow distribution can be realized.


Installation according to floor layout



Installation according to lighting conditions




Installation according to layout and lighting conditions



### Simultaneous control

Max 16 indoor units are simultaneously controlled with a wired remote controller.

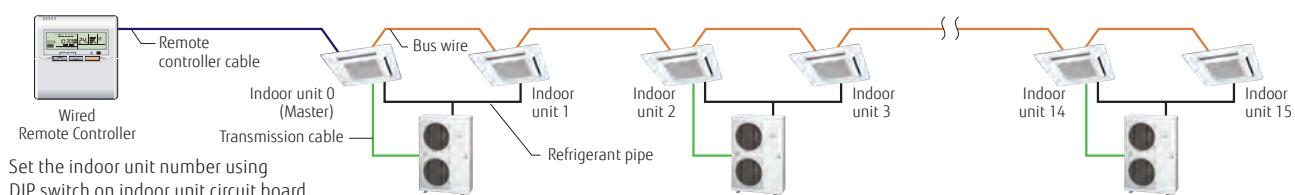

### Indoor unit lineup

3 types 9 models indoor units are provided, so you can select them depending on your room size and conditions.



Compact Cassette



Slim Duct



Duct



Floor/Ceiling Universal

**Model : A0YG36LTB / A0YG45LTB / A0YG54LTB  
AOYG36LATT [3phase] / A0YG45LATT [3phase] / A0YG54LATT [3phase]**



### Specifications




| Model No.                               | Indoor unit                     |                          | Compact Cassette |                  |                                       |
|---|---------------------------------|--------------------------|------------------|------------------|---------------------------------------|
|   |                                 |                          | AUYG18LVBL       | AUYG22LVLA       | AUYG24LVLA                            |
| Power Source                            | Single-phase, ~230V, 50Hz       |                          |                  |                  |                                       |
| Airflow Rate (High)                     | Cooling                         | H/M/L/Q                  | m³/h             | 680/580/490/410  | 930/830/600/450                       |
| Net Dimension H × W × D                 |                                 | mm                       |                  | 245×570×570      | 245×570×570                           |
| Weight                                  |                                 | kg(lbs)                  |                  | 15 (33)          | 16 (35)                               |
| Cassette Grille                         |                                 |                          |                  | UTG-UFYD-W       | UTG-UFYD-W                            |
| Model No.                               | Indoor unit                     |                          | Duct             |                  | Floor/Ceiling Universal               |
|   |                                 |                          | ARYG18LLTB       | ARYG22LMLA       | ARYG24LMLA                            |
| Power Source                            | Single-phase, ~230V, 50Hz       |                          |                  |                  |                                       |
| Airflow Rate (High)                     | Cooling                         | H/M/L/Q                  | m³/h             | 940/880/820/750  | 1100/910/750/580                      |
| Net Dimension H × W × D                 |                                 | mm                       |                  | 198 × 900 × 620  | 270 × 1135 × 700                      |
| Weight                                  |                                 | kg(lbs)                  |                  | 38 (84)          | 38 (84)                               |
| Model No.                               | Outdoor unit                    |                          | A0YG36LTB        | A0YG45LTB        | A0YG54LTB                             |
| Capacity                                | Cooling                         | kW                       | 10.0             | 12.1             | 13.3                                  |
|   | Heating                         |                          | 11.2             | 14.0             | 15.0                                  |
| Power Source                            | Single-phase, ~230V, 50Hz       |                          |                  |                  |                                       |
| Pdesign                                 | Cooling                         | kW                       | 10.0             | -                | -                                     |
|   | Heating (-10°C)                 |                          | 10.0             | -                | -                                     |
| SEER                                    | Cooling                         | W/W                      | 5.56             | -                | -                                     |
|   | Heating                         |                          | 3.90             | -                | -                                     |
| SCOP                                    | Cooling                         | kWh/a                    | 629              | -                | -                                     |
|   | Heating                         |                          | 3588             | -                | -                                     |
| Annual Energy Consumption               | Cooling                         | kWh/a                    | A                | -                | -                                     |
|   | Heating                         |                          | A                | -                | -                                     |
| Energy Efficiency Class                 | Cooling                         | dB(A)                    | 52               | 54               | 55                                    |
|   | Heating                         |                          | 69               | 70               | 72                                    |
| Sound Pressure Level (High)             | Cooling                         | mm                       | 1290×900×330     | 1290×900×330     | 1290×900×330                          |
| Sound Power Level (High)                | Heating                         |                          | 93(205)          | 93(205)          | 93(205)                               |
| Net Dimension H × W × D                 |                                 | kg(lbs)                  |                  |                  |                                       |
| Weight                                  |                                 |                          |                  |                  |                                       |
| Connection Pipe Diameter (Liquid / Gas) |                                 | mm                       | 9.52/15.88       | 9.52/15.88       | 9.52/15.88                            |
| Max Pipe Length (Pre-Charge)            |                                 | m                        | 75(30)           | 75(30)           | 75(30)                                |
| Height Difference                       |                                 |                          | 30               | 30               | 30                                    |
| Operation Range                         | Cooling                         | °CDB                     | -15 to 46        | -15 to 46        | -15 to 46                             |
|   | Heating                         |                          | -15 to 24        | -15 to 24        | -15 to 24                             |
| Refrigerant                             | Type (Global Warming Potential) |                          | R410A (2,088)    | R410A (2,088)    | R410A (2,088)                         |
|   | Charge                          | kg(CO <sub>2</sub> eq-T) | 3.45 (7.2)       | 3.45 (7.2)       | 3.45 (7.2)                            |
| Separation tube                         |                                 |                          | UTP-SX236A(Twin) | UTP-SX254A(Twin) | UTP-SX254A(Twin) / UTP-SX354A(Triple) |

\*Different type and capacity indoor units can not be connected .

\*The above table is the value for connecting with cassette type.

### Dimensions

(Unit : mm)

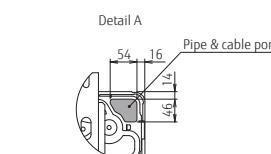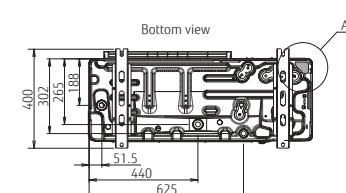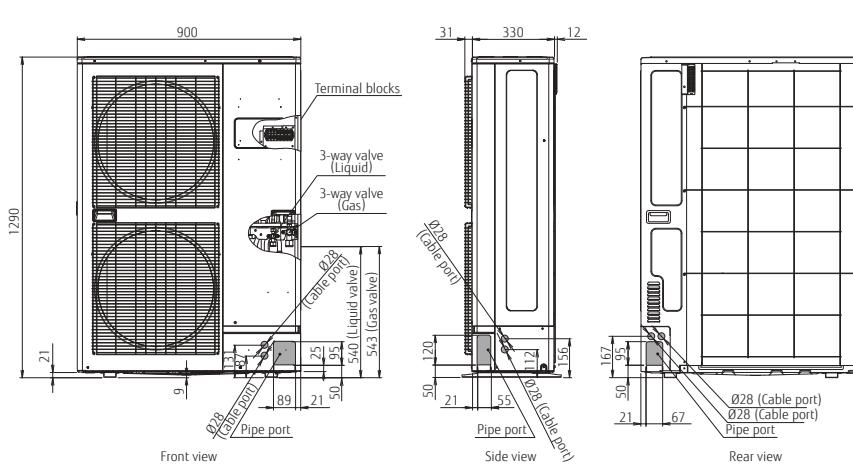




## PRODUCT LINEUP: MULTI SPLIT




Can support various applications from large open plan offices to retail stores with up to 4 indoor units.

Indoor units distributed layout according to the shape and number of people and lighting conditions of the room even on wide floors. Ideal comfortable air flow distribution can be realized.


Installation according to floor layout




Installation according to lighting conditions



Installation according to layout and lighting conditions




Installation according to large space



### Simultaneous control

Max 16 indoor units are simultaneously controlled with a wired remote controller.

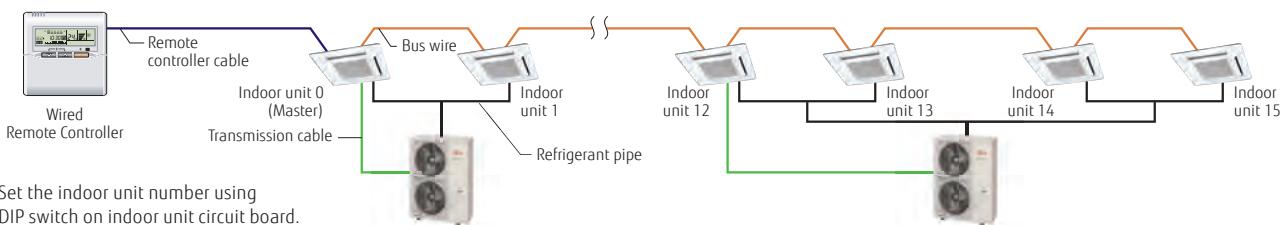

\*When using a wireless remote controller, the following functions cannot be used: Timer operation, Sleep Timer operation, 10°C Heat operation

### Indoor unit lineup

5 types 18 models indoor units are provided, so you can select them depending on your room size and conditions.



Compact Cassette



Cassette



Duct



Floor/Ceiling Universal



Ceiling

**Model: AOYG72LRLA [3phase] / AOYG90LRLA [3phase]****Specifications**

| Model No.                               | Indoor unit                     | Compact Cassette, Cassette |                      |                   |                  |                     |                     |                     |
|---|---------------------------------|----------------------------|----------------------|-------------------|------------------|---------------------|---------------------|---------------------|
|   |                                 | AUYG18LVLB                 | AUYG22LVLA           | AUYG24LVLA        | AUYG30LRLE       | AUYG36LRLE          | AUYG45LRLA          |                     |
| Power Source                            |                                 | Single-phase, ~230V, 50Hz  |                      |                   |                  |                     |                     |                     |
| Airflow Rate (Cooling)                  | H/M/L/Q                         | m³/h                       | 680/580/490/410      | 930/830/600/450   | 930/830/600/450  | 1600/1400/1270/1150 | 1800/1400/1270/1150 | 1900/1640/1460/1250 |
| Net Dimension H × W × D                 | mm                              |                            | 245×570×570          | 245×570×570       | 245×570×570      | 288 × 840 × 840     | 288 × 840 × 840     | 288 × 840 × 840     |
| Weight                                  | kg(lbs)                         |                            | 15 (33)              | 16 (35)           | 16 (35)          | 26 (57)             | 26 (57)             | 26 (57)             |
| Cassette Grille                         |                                 |                            | UTG-UFYD-W           |                   | UTG-UGYA-W       |                     |                     |                     |
| Model No.                               | Indoor unit                     | Duct                       |                      |                   |                  |                     |                     |                     |
|   |                                 | ARYG18LLTB                 | ARYG22LMLA           | ARYG24LMLA        | ARYG30LMLE       | ARYG36LMLE          | ARYG45LMLA          |                     |
| Power Source                            |                                 | Single-phase, ~230V, 50Hz  |                      |                   |                  |                     |                     |                     |
| Airflow Rate (Cooling)                  | H/M/L/Q                         | m³/h                       | 940/880/820/750      | 1100/910/750/580  | 1100/910/750/580 | 1900/1620/1270/980  | 1900/1620/1270/980  | 2100/1750/1350/1070 |
| Net Dimension H × W × D                 | mm                              |                            | 198 × 900 × 620      | 270 × 1135 × 700  | 270 × 1135 × 700 | 270 × 1135 × 700    | 270 × 1135 × 700    | 270 × 1135 × 700    |
| Weight                                  | kg(lbs)                         |                            | 23 (51)              | 38 (84)           | 38 (84)          | 40 (88)             | 40 (88)             | 40 (88)             |
| Model No.                               | Indoor unit                     | Floor/Ceiling, Ceiling     |                      |                   |                  |                     |                     |                     |
|   |                                 | ABYG18LVTB                 | ABYG22LVTA           | ABYG24LVTA        | ABYG30LRTE       | ABYG36LRTE          | ABYG45LRTA          |                     |
| Power Source                            |                                 | Single-phase, ~230V, 50Hz  |                      |                   |                  |                     |                     |                     |
| Airflow Rate (Cooling)                  | H/M/L/Q                         | m³/h                       | 780/700/560/500      | 980/820/680/540   | 980/820/680/540  | 1660/1500/1200/1000 | 1900/1500/1200/1000 | 2100/1700/1400/1100 |
| Net Dimension H × W × D                 | mm                              |                            | 199 × 990 × 655      | 199 × 990 × 655   | 199 × 990 × 655  | 240 × 1660 × 700    | 240 × 1660 × 700    | 240 × 1660 × 700    |
| Weight                                  | kg(lbs)                         |                            | 27 (60)              | 27 (60)           | 27 (60)          | 46 (101)            | 46 (101)            | 46 (101)            |
| Model No.                               | Outdoor unit                    |                            | AOYG72LRLA           |                   |                  | AOYG90LRLA          |                     |                     |
| Capacity                                | Cooling                         | kW                         |                      | 19.0              |                  | 22.0                |                     |                     |
|   | Heating                         |                            |                      | 22.4              |                  | 27.0                |                     |                     |
| Power Source                            |                                 |                            | 3-phase, ~400V, 50Hz |                   |                  |                     |                     |                     |
| Sound Pressure Level (High)             | Cooling                         | dB(A)                      |                      | 55                |                  | 55                  |                     |                     |
| Net Dimension H × W × D                 | mm                              |                            |                      | 1428 × 1080 × 480 |                  | 1428 × 1080 × 480   |                     |                     |
| Weight                                  | kg(lbs)                         |                            |                      | 163 (359)         |                  | 172 (378)           |                     |                     |
| Connection Pipe Diameter (Liquid / Gas) | mm                              |                            |                      | 12.7/25.4         |                  | 12.7/25.4           |                     |                     |
| Max Pipe Length (Pre-Charge)            | m                               |                            |                      | 100 (30)          |                  | 100 (30)            |                     |                     |
| Height Difference                       |                                 |                            |                      | 30                |                  | 30                  |                     |                     |
| Operation Range                         | Cooling                         | °CDB                       |                      | -15 to 46         |                  | -15 to 46           |                     |                     |
|   | Heating                         |                            |                      | -20 to 24         |                  | -20 to 24           |                     |                     |
| Refrigerant                             | Type (Global Warming Potential) |                            |                      | R410A (2,088)     |                  | R410A (2,088)       |                     |                     |
|   | Charge                          | kg(CO <sub>2</sub> eq-T)   |                      | 5.6 (11.7)        |                  | 7.1 (14.8)          |                     |                     |


\*: That specification is not fixed yet.

• Different type and capacity indoor units can not be connected.

• The above table is the value for connecting with cassette type.

**Dimensions**

(Unit : mm)

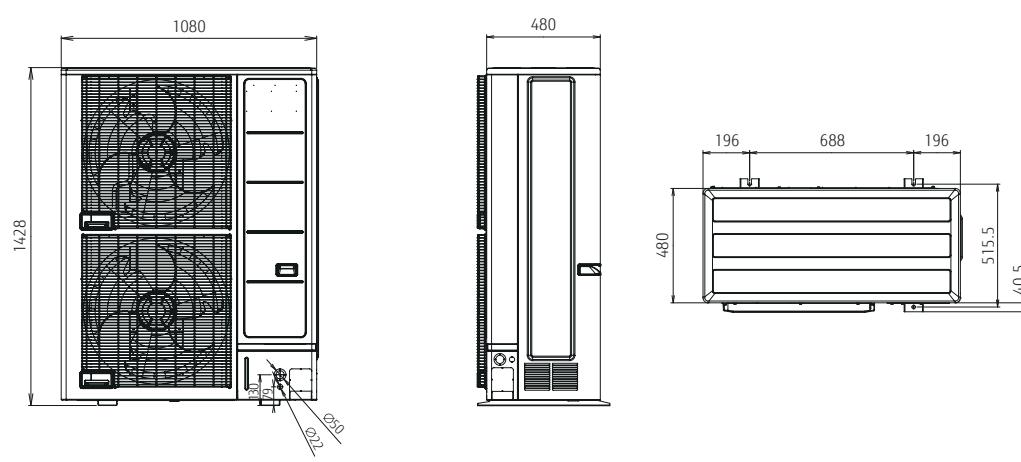




## PRODUCT LINEUP: MULTI SPLIT

### Connectable Indoor Units — Indoor Unit Lineup —

| MULTI SPLIT<br>Outdoor Unit | Type             | 2 Rooms    |            | 3 Rooms    |            | 4 Rooms    | 5 Rooms     | 6 Rooms     | 8 Rooms    |      |
|-----------------------------|------------------|------------|------------|------------|------------|------------|-------------|-------------|------------|------|
|                             | Model name       | AOYG14LAC2 | AOYG18LAC2 | AOYG18LAT3 | AOYG24LAT3 | AOYG30LAT4 | AOYG36LBLA5 | AOYG45LBLA6 | AOYG45LBT8 |      |
|                             | Capacity<br>(kW) | Cooling    | 4.0        | 5.0        | 5.4        | 6.8        | 8.0         | 10.0        | 12.5       | 14.0 |
|                             | Heating          | 4.4        | 5.6        | 6.8        | 8.0        | 9.6        | 12.0        | 13.5        | 16.0       |      |
| Indoor Unit                 | BTU              | kW Class   |            |            |            |            |             |             |            |      |
| ASYG07/09/12/14LMCE         | 7000             | 2.0        | ●          | ●          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 9000             | 2.5        | ●          | ●          | ●          | ●          | ●           | ●           | ●          |      |
| ASYG07/09/12/14LUCA         | 12000            | 3.5        | ●          | ●          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 14000            | 4.0        | —          | ●          | ●          | ●          | ●           | ●           | ●          |      |
| ASYG18/24LF                 | 18000            | 5.0        | —          | —          | —          | ●          | ●           | ●           | ●          |      |
|                             | 24000            | 7.0        | —          | —          | —          | —          | ●           | —           | ●          |      |
| AGYG09/12/14LV              | 9000             | 2.5        | —          | ●          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 12000            | 3.5        | —          | ●          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 14000            | 4.0        | —          | —          | ●          | ●          | ●           | ●           | ●          |      |
| AUYG07/09/12/<br>14/18LV    | 7000             | 2.0        | —          | ●          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 9000             | 2.5        | —          | ●          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 12000            | 3.5        | —          | ●          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 14000            | 4.0        | —          | —          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 18000            | 5.0        | —          | —          | —          | ●          | ●           | ●           | ●          |      |
| ABYG14/18LV                 | 14000            | 4.0        | —          | —          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 18000            | 5.0        | —          | —          | —          | ●          | ●           | ●           | ●          |      |
| ARYG07/09/12/<br>14/18LSAP  | 7000             | 2.0        | —          | ●          | ●          | ●          | ●           | ●           | —          |      |
|                             | 9000             | 2.5        | —          | ●          | ●          | ●          | ●           | ●           | —          |      |
|                             | 12000            | 3.5        | —          | ●          | ●          | ●          | ●           | ●           | —          |      |
|                             | 14000            | 4.0        | —          | —          | ●          | ●          | ●           | ●           | —          |      |
|                             | 18000            | 5.0        | —          | —          | —          | ●          | ●           | ●           | —          |      |
| ARYG07/09/12/<br>14/18LL    | 7000             | 2.0        | —          | ●          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 9000             | 2.5        | —          | ●          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 12000            | 3.5        | —          | ●          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 14000            | 4.0        | —          | —          | ●          | ●          | ●           | ●           | ●          |      |
|                             | 18000            | 5.0        | —          | —          | —          | ●          | ●           | ●           | ●          |      |

| SIMULTANEOUS MULTI<br>Outdoor Unit | Type             | 4HP        |                  | 5HP              |                 | 6HP              |                  | 8HP              |                                       | 10HP             |                  |                                       |             |      |      |      |
|------------------------------------|------------------|------------|------------------|------------------|-----------------|------------------|------------------|------------------|---------------------------------------|------------------|------------------|---------------------------------------|-------------|------|------|------|
|                                    | Model name       | AOYG36LBTB | AOYG36LATT       | AOYG45LBTB       | AOYG45LATT      | AOYG54LBTB       | AOYG54LATT       | AOYG72RLA        |                                       | AOYG90LRLA       |                  |                                       |             |      |      |      |
|                                    | Capacity<br>(kW) | Cooling    | 10.0             | 12.1             | 12.5            | 13.3             | 14.0             | 10.0             | 12.5                                  | Heating          | 11.2             | 14.0                                  | 14.0        | 15.0 | 16.0 | 12.0 |
| Indoor Unit                        | BTU              | kW Class   | Twin             |                  |                 |                  | Triple           | Twin             | Triple                                | Double Twin      | Twin             | Triple                                | Double Twin |      |      |      |
| AUYG18/22/24LV                     | 18000            | 5.0        | ● ×2             | —                | —               | ● ×3             | —                | —                | ● ×4                                  | —                | —                | —                                     |             |      |      |      |
|                                    | 22000            | 6.5        | —                | ● ×2             | —               | —                | —                | —                | —                                     | —                | —                | ● ×4                                  |             |      |      |      |
|                                    | 24000            | 7.0        | —                | —                | ● ×2            | —                | —                | ● ×3             | —                                     | —                | —                | —                                     |             |      |      |      |
| AUYG30/36/45LR                     | 30000            | 8.8        | —                | —                | —               | —                | —                | —                | —                                     | ● ×3             | —                | —                                     |             |      |      |      |
|                                    | 36000            | 10.6       | —                | —                | —               | —                | ● ×2             | —                | —                                     | —                | —                | —                                     |             |      |      |      |
|                                    | 45000            | 12.5       | —                | —                | —               | —                | —                | —                | —                                     | ● ×2             | —                | —                                     |             |      |      |      |
| ARYG18LL                           | 18000            | 5.0        | ● ×2             | —                | —               | ● ×3             | —                | —                | ● ×4                                  | —                | —                | —                                     |             |      |      |      |
| ARYG22/24/<br>30/36/45LM           | 22000            | 6.5        | —                | ● ×2             | —               | —                | —                | —                | —                                     | —                | —                | ● ×4                                  |             |      |      |      |
|                                    | 24000            | 7.0        | —                | —                | ● ×2            | —                | —                | ● ×3             | —                                     | —                | —                | —                                     |             |      |      |      |
|                                    | 30000            | 8.8        | —                | —                | —               | —                | —                | —                | —                                     | ● ×3             | —                | —                                     |             |      |      |      |
|                                    | 36000            | 10.6       | —                | —                | —               | —                | ● ×2             | —                | —                                     | —                | —                | —                                     |             |      |      |      |
|                                    | 45000            | 12.5       | —                | —                | —               | —                | —                | —                | —                                     | ● ×2             | —                | —                                     |             |      |      |      |
| ABYG/18/22/24LV                    | 18000            | 5.0        | ● ×2             | —                | —               | ● ×3             | —                | —                | ● ×4                                  | —                | —                | —                                     |             |      |      |      |
|                                    | 22000            | 6.5        | —                | ● ×2             | —               | —                | —                | —                | —                                     | —                | —                | ● ×4                                  |             |      |      |      |
|                                    | 24000            | 7.0        | —                | —                | ● ×2            | —                | —                | ● ×3             | —                                     | —                | —                | —                                     |             |      |      |      |
| ABYG30/36/45LR                     | 30000            | 8.8        | —                | —                | —               | —                | —                | —                | —                                     | ● ×3             | —                | —                                     |             |      |      |      |
|                                    | 36000            | 10.6       | —                | —                | —               | —                | ● ×2             | —                | —                                     | —                | —                | —                                     |             |      |      |      |
|                                    | 45000            | 12.5       | —                | —                | —               | —                | —                | —                | —                                     | ● ×2             | —                | —                                     |             |      |      |      |
| Separation tube                    |                  |            | UTP-SX236A<br>×1 | UTP-SX254A<br>×1 | UTP-SX254<br>×1 | UTP-SX354A<br>×1 | UTP-SX272A<br>×1 | UTP-SX372A<br>×1 | UTP-SX272A<br>×1,<br>UTP-SX236A<br>×2 | UTP-SX272A<br>×1 | UTP-SX372A<br>×1 | UTP-SX272A<br>×1,<br>UTP-SX254A<br>×2 |             |      |      |      |



## PRODUCT LINEUP: MULTI SPLIT

# MULTI SPLIT Indoor Units Specifications

Compact wall mounted



| Model No.                | Indoor unit |         |         | ASYG07LUCA      | ASYG09LUCA      | ASYG12LUCA      | ASYG14LUCA      |
|--------------------------|-------------|---------|---------|-----------------|-----------------|-----------------|-----------------|
| kW Class                 |             |         | kW      | 2.0             | 2.5             | 3.5             | 4.0             |
| Power Source             |             |         |         |                 |                 |                 |                 |
| Sound Pressure Level     | Cooling     | H/M/L/Q | dB(A)   | 35/30/28/21     | 36/32/28/21     | 37/34/31/21     | 41/36/33/25     |
|                          | Heating     |         |         | 35/30/28/21     | 36/32/28/21     | 37/34/31/21     | 41/36/34/27     |
| Sound Power Level        | Cooling     | H       | dB(A)   | 53              | 54              | 55              | 59              |
|                          | Heating     |         |         | 53              | 54              | 55              | 59              |
| Airflow Rate             | Cooling     | H/M/L/Q | m³/h    | 570/520/470/330 | 600/550/470/330 | 660/600/530/330 | 710/640/570/390 |
|                          | Heating     |         |         | 570/520/470/330 | 600/550/470/330 | 660/600/530/330 | 710/640/590/430 |
| Net Dimensions           |             |         | mm      | 282×870×185     | 282×870×185     | 282×870×185     | 282×870×185     |
| Weight                   |             |         | kg(lbs) | 9.5 (21)        | 9.5 (21)        | 9.5 (21)        | 9.5 (21)        |
| Connection Pipe Diameter | Liquid/Gas  | mm      |         | 6.35/9.52       | 6.35/9.52       | 6.35/9.52       | 6.35/12.7       |

Wall mounted



| Model No.                | Indoor unit |         |         | ASYG18LFCA      | ASYG24LFCC       |
|--------------------------|-------------|---------|---------|-----------------|------------------|
| kW Class                 |             |         | kW      | 5.0             | 7.0              |
| Power Source             |             |         |         |                 |                  |
| Sound Pressure Level     | Cooling     | H/M/L/Q | dB(A)   | 43/37/33/26     | 49/42/37/33      |
|                          | Heating     |         |         | 42/37/33/25     | 48/42/37/33      |
| Sound Power Level        | Cooling     | H       | dB(A)   | 58              | 64               |
|                          | Heating     |         |         | 58              | 64               |
| Airflow Rate             | Cooling     | H/M/L/Q | m³/h    | 900/740/620/550 | 1120/900/740/620 |
|                          | Heating     |         |         | 900/740/620/550 | 1100/900/740/620 |
| Net Dimensions           |             |         | mm      | 320×998×238     | 320×998×238      |
| Weight                   |             |         | kg(lbs) | 14 (30.8)       | 14 (30.8)        |
| Connection Pipe Diameter | Liquid/Gas  | mm      |         | 6.35/12.7       | Ø6.35/Ø15.88     |

Compact wall mounted



| Model No.                | Indoor unit |         |         | ASYG07LMCE      | ASYG09LMCE      | ASYG12LMCE      | ASYG14LMCE      |
|--------------------------|-------------|---------|---------|-----------------|-----------------|-----------------|-----------------|
| kW Class                 |             |         | kW      | 2.0             | 2.5             | 3.5             | 4.0             |
| Power Source             |             |         |         |                 |                 |                 |                 |
| Sound Pressure Level     | Cooling     | H/M/L/Q | dB(A)   | 36/32/29/21     | 37/33/29/21     | 40/36/30/21     | 42/38/33/25     |
|                          | Heating     |         |         | 36/32/29/22     | 37/33/29/22     | 40/36/31/22     | 42/38/35/27     |
| Sound Power Level        | Cooling     | H       | dB(A)   | 51              | 52              | 54              | 56              |
|                          | Heating     |         |         | 51              | 52              | 55              | 57              |
| Airflow Rate             | Cooling     | H/M/L/Q | m³/h    | 560/500/430/310 | 600/520/430/310 | 660/560/450/310 | 730/600/530/360 |
|                          | Heating     |         |         | 560/500/430/330 | 600/520/430/330 | 660/560/470/330 | 730/615/560/375 |
| Net Dimensions           |             |         | mm      | 270×870×204     | 270×870×204     | 270×870×204     | 270×870×204     |
| Weight                   |             |         | kg(lbs) | 8.5 (18.7)      | 8.5 (18.7)      | 8.5 (18.7)      | 8.5 (18.7)      |
| Connection Pipe Diameter | Liquid/Gas  | mm      |         | 6.35/9.52       | 6.35/9.52       | 6.35/9.52       | 6.35/12.7       |

Floor



| Model No.                | Indoor unit |         |         | AGYG09LVCA      | AGYG12LVCA      | AGYG14LVCA      |
|--------------------------|-------------|---------|---------|-----------------|-----------------|-----------------|
| kW Class                 |             |         | kW      | 2.5             | 3.5             | 4.0             |
| Power Source             |             |         |         |                 |                 |                 |
| Sound Pressure Level     | Cooling     | H/M/L/Q | dB(A)   | 39/34/28/22     | 42/36/30/22     | 44/38/31/22     |
|                          | Heating     |         |         | 39/35/30/22     | 42/38/32/22     | 44/39/33/22     |
| Sound Power Level        | Cooling     | H       | dB(A)   | 52              | 55              | 56              |
|                          | Heating     |         |         | 52              | 55              | 56              |
| Airflow Rate             | Cooling     | H/M/L/Q | m³/h    | 530/440/360/270 | 600/490/380/270 | 650/520/400/270 |
|                          | Heating     |         |         | 530/460/380/270 | 600/510/410/270 | 650/540/430/270 |
| Net Dimensions           |             |         | mm      | 600×740×200     | 600×740×200     | 600×740×200     |
| Weight                   |             |         | kg(lbs) | 14 (30.7)       | 14 (30.7)       | 14 (30.7)       |
| Connection Pipe Diameter | Liquid/Gas  | mm      |         | 6.35/9.52       | 6.35/9.52       | 6.35/12.7       |



## Floor ceiling



| Model No.                | Indoor unit |         | ABYG14LVTA |  | ABYG18LVTB      |  |
|--------------------------|-------------|---------|------------|--|-----------------|--|
| kW Class                 |             |         | kW         |  | 4.0             |  |
| Power Source             |             |         |            |  |                 |  |
| Sound Pressure Level     | Cooling     | H/M/L/Q | dB(A)      | 36/34/33/29 (Under ceiling)<br>39/37/36/32 (Floor console) |                 | 41/38/34/32 (Under ceiling)<br>44/41/37/35 (Floor console) |
|                          | Heating     |         |            | 36/34/33/29 (Under ceiling)<br>39/37/36/32 (Floor console) |                 | 41/38/34/32 (Under ceiling)<br>44/41/37/35 (Floor console) |
| Sound Power Level        | Cooling     | H       | dB(A)      | 51   | 55              | 55   |
|                          | Heating     |         |            | 51   |                 |  |
| Airflow Rate             | Cooling     | H/M/L/Q | m³/h       | 640/590/540/480  | 780/700/560/500 |  |
|                          | Heating     |         |            | 640/590/540/480  | 780/700/560/500 |  |
| Net Dimensions           |             |         | mm         | 199×990×655  | 199×990×655     |  |
| Weight                   |             |         | kg(lbs)    | 27 (60)  | 27 (60)         |  |
| Connection Pipe Diameter | Liquid/Gas  |         | mm         | 6.35/12.7  | 6.35/12.7       |  |

## Compact cassette



| Model No.                | Indoor unit |         | AUYG07LVLA | AUYG09LVLA      | AUYG12LVLB      | AUYG14LVLB      | AUYG18LVLB      |
|--------------------------|-------------|---------|------------|-----------------|-----------------|-----------------|-----------------|
| kW Class                 |             |         | kW         | 2.0             | 2.5             | 3.5             | 4.0             |
| Power Source             |             |         |            |                 |                 |                 |                 |
| Sound Pressure Level     | Cooling     | H/M/L/Q | dB(A)      | 33/31/29/27     | 33/31/29/27     | 37/33/31/28     | 40/35/32/29     |
|                          | Heating     |         |            | 34/32/29/27     | 34/32/29/27     | 37/33/31/28     | 40/37/34/29     |
| Sound Power Level        | Cooling     | H       | dB(A)      | 46              | 46              | 49              | 52              |
|                          | Heating     |         |            | 47              | 47              | 49              | 52              |
| Airflow Rate             | Cooling     | H/M/L/Q | m³/h       | 540/490/440/390 | 540/490/440/390 | 610/530/470/410 | 680/580/490/410 |
|                          | Heating     |         |            | 540/490/440/390 | 540/490/440/390 | 610/530/470/410 | 750/610/520/410 |
| Net Dimensions           |             |         | mm         | 245×570×570     | 245×570×570     | 245×570×570     | 245×570×570     |
| Weight                   |             |         | kg(lbs)    | 15(33.1)        | 15 (33.1)       | 15 (33.1)       | 15 (33.1)       |
| Panel                    |             |         |            |                 | UTG-UFYD-W      |                 |                 |
| Connection Pipe Diameter | Liquid/Gas  | mm      |            | 6.35/9.52       | 6.35/9.52       | 6.35/12.7       | 6.35/12.7       |

## Mini duct



| Model No.                | Indoor unit |         | ARYG07LSAP | ARYG09LSAP      | ARYG012LSAP     | ARYG14LSAP      | ARYG18LSAP      |
|--------------------------|-------------|---------|------------|-----------------|-----------------|-----------------|-----------------|
| kW Class                 |             |         | kW         | 2.0             | 2.5             | 3.5             | 4.0             |
| Power Source             |             |         |            |                 |                 |                 |                 |
| Sound Pressure Level     | Cooling     | H/M/L/Q | dB(A)      | 29/26/24/23     | 29/26/24/23     | 31/27/25/23     | 35/30/27/23     |
|                          | Heating     |         |            | 29/26/24/23     | 29/26/24/23     | 31/27/25/23     | 35/30/27/23     |
| Sound Power Level        | Cooling     | H       | dB(A)      | 52              | 54              | 55              | 60              |
|                          | Heating     |         |            | 53              | 56              | 57              | 62              |
| Airflow Rate             | Cooling     | H/M/L/Q | m³/h       | 550/440/390/360 | 600/450/400/360 | 650/490/430/360 | 800/640/530/360 |
|                          | Heating     |         |            | 550/440/390/360 | 600/450/400/360 | 650/490/430/360 | 940/750/540/480 |
| Net Dimensions           |             |         | mm         | 198×700×450     | 198×700×450     | 198×700×450     | 198×900×450     |
| Weight                   |             |         | kg(lbs)    |                 | 15.5 (34.1)     |                 | 18.5 (40.7)     |
| Connection Pipe Diameter | Liquid/Gas  | mm      |            | 6.35/9.52       |                 | 6.35/12.70      |                 |
| External static pressure |             | Pa      |            | 0 to 30         |                 | 0 to 50         |                 |
| Drain pump               |             |         |            | Standard        |                 |                 |                 |

## Slim duct



| Model No.                | Indoor unit |         | ARYG07LLTA | ARYG09LLTA      | ARYG12LLTB      | ARYG14LLTB      | ARYG18LLTB      |
|--------------------------|-------------|---------|------------|-----------------|-----------------|-----------------|-----------------|
| kW Class                 |             |         | kW         | 2.0             | 2.5             | 3.5             | 4.0             |
| Power Source             |             |         |            |                 |                 |                 |                 |
| Sound Pressure Level     | Cooling     | H/M/L/Q | dB(A)      | 28/26/25/24     | 28/27/26/25     | 29/28/27/26     | 32/30/28/26     |
|                          | Heating     |         |            | 28/26/25/24     | 28/26/25/24     | 29/28/27/24     | 33/30/28/25     |
| Sound Power Level        | Cooling     | H       | dB(A)      | 57              | 57              | 58              | 60              |
|                          | Heating     |         |            | 57              | 57              | 58              | 61              |
| Airflow Rate             | Cooling     | H/M/L/Q | m³/h       | 550/490/470/440 | 600/550/500/450 | 650/600/550/480 | 800/700/600/480 |
|                          | Heating     |         |            | 550/490/470/440 | 600/550/500/450 | 650/600/550/480 | 940/880/820/750 |
| Net Dimensions           |             |         | mm         | 198×700×620     | 198×700×620     | 198×700×620     | 198×900×620     |
| Weight                   |             |         | kg(lbs)    | 17 (37.5)       | 19 (41.8)       | 19 (41.8)       | 23 (50.6)       |
| Connection Pipe Diameter | Liquid/Gas  | mm      |            | 6.35/9.52       | 6.35/9.52       | 6.35/9.52       | 6.35/12.7       |
| External static pressure |             | Pa      |            | 0 to 90         | Standard        | 6.35/12.7       |                 |
| Drain pump               |             |         |            |                 |                 |                 |                 |

## PRODUCT LINEUP: MULTI SPLIT

# MULTI SPLIT Combination Table for 2 & 3 Rooms-Cooling/Heating

### 2 Rooms Multi cooling

| AOYG14LAC2 | Combination of Indoor Unit | COOLING OPERATION |        |                          |                       |      |               |         |      |
|------------|----------------------------|-------------------|--------|--------------------------|-----------------------|------|---------------|---------|------|
|            |                            | Cooling Capacity  |        |                          | Input Power (min-max) | EER  | Seasonal Data |         |      |
|            |                            | Room 1            | Room 2 | Total Capacity (min-max) |                       |      | kW            | Pdesign | SEER |
| 2 Room     | 7 7                        | 2.00              | 2.00   | 4.00 (1.4 - 4.4)         | 1.09 (0.35 - 1.40)    | 3.67 | 4.0           | 6.7     | A++  |
|            | 7 9                        | 1.95              | 2.05   | 4.00 (1.4 - 4.4)         | 1.09 (0.35 - 1.40)    | 3.67 | 4.0           | 6.6     | A++  |
|            | 7 12                       | 1.65              | 2.35   | 4.00 (1.4 - 4.6)         | 1.05 (0.35 - 1.47)    | 3.81 | 4.0           | 6.5     | A++  |
|            | 9 9                        | 2.00              | 2.00   | 4.00 (1.4 - 4.5)         | 1.09 (0.35 - 1.43)    | 3.67 | 4.0           | 6.6     | A++  |
|            | 9 12                       | 1.70              | 2.30   | 4.00 (1.4 - 4.7)         | 1.05 (0.35 - 1.47)    | 3.81 | 4.0           | 6.5     | A++  |

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h models

- The above is the value for connecting with Wall Mounted type.
- 2 or more indoor units should be connected.
- Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).
- Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
- The Total ability of connected indoor unit is up to 21000Btu from 14000Btu.

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h models

- The above is the value for connecting with Wall Mounted type.
- 2 or more indoor units should be connected.
- Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).
- Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
- The Total ability of connected indoor unit is up to 24000Btu from 14000Btu.
- Where "14" means "wall mounted type" only models. Other types of indoor units can not be connected.

### 3 Rooms Multi cooling

| AOYG18LAT3 | Combination of Indoor Unit | COOLING OPERATION |        |        |                          |                       |      |               |         |      |
|------------|----------------------------|-------------------|--------|--------|--------------------------|-----------------------|------|---------------|---------|------|
|            |                            | Cooling Capacity  |        |        |                          | Input Power (min-max) | EER  | Seasonal Data |         |      |
|            |                            | Room 1            | Room 2 | Room 3 | Total Capacity (min-max) |                       |      | kW            | Pdesign | SEER |
| 2 Room     | 7 7 -                      | 2.30              | 2.30   | -      | 4.60 (1.8 - 5.0)         | 1.22 (0.50 - 1.43)    | 3.77 | 4.6           | 6.3     | A++  |
|            | 7 9 -                      | 2.30              | 2.70   | -      | 5.00 (1.8 - 5.7)         | 1.35 (0.50 - 1.81)    | 3.70 | 5.0           | 6.2     | A++  |
|            | 7 12 -                     | 1.98              | 3.02   | -      | 5.00 (1.8 - 6.1)         | 1.34 (0.50 - 2.06)    | 3.73 | 5.0           | 6.2     | A++  |
|            | 7 14 -                     | 1.88              | 3.42   | -      | 5.30 (1.8 - 6.6)         | 1.34 (0.50 - 2.06)    | 3.96 | 5.3           | 6.1     | A++  |
|            | 9 9 -                      | 2.50              | 2.50   | -      | 5.00 (1.8 - 6.2)         | 1.35 (0.50 - 2.06)    | 3.70 | 5.0           | 6.2     | A++  |
|            | 9 12 -                     | 2.18              | 2.82   | -      | 5.00 (1.8 - 6.3)         | 1.35 (0.50 - 2.06)    | 3.70 | 5.0           | 6.2     | A++  |
|            | 9 14 -                     | 2.07              | 3.23   | -      | 5.30 (1.8 - 6.7)         | 1.35 (0.50 - 2.06)    | 3.93 | 5.3           | 6.1     | A++  |
|            | 12 12 -                    | 2.55              | 2.55   | -      | 5.10 (1.8 - 6.3)         | 1.35 (0.50 - 2.06)    | 3.78 | 5.1           | 6.1     | A++  |
|            | 12 14 -                    | 2.41              | 2.89   | -      | 5.30 (1.8 - 6.7)         | 1.35 (0.50 - 2.06)    | 3.93 | 5.3           | 6.1     | A++  |
|            | 7 7 7                      | 1.80              | 1.80   | 1.80   | 5.40 (1.8 - 6.8)         | 1.35 (0.50 - 2.06)    | 4.00 | 5.4           | 6.9     | A++  |
| 3 Room     | 7 7 9                      | 1.70              | 2.00   | 2.00   | 5.40 (1.8 - 6.8)         | 1.35 (0.50 - 2.06)    | 4.00 | 5.4           | 6.9     | A++  |
|            | 7 7 12                     | 1.53              | 2.33   | 2.33   | 5.40 (1.8 - 6.8)         | 1.35 (0.50 - 2.06)    | 4.00 | 5.4           | 6.7     | A++  |
|            | 7 7 14                     | 1.41              | 2.58   | 2.58   | 5.40 (2.0 - 6.8)         | 1.35 (0.60 - 2.06)    | 4.00 | 5.4           | 6.7     | A++  |
|            | 7 9 9                      | 1.61              | 1.89   | 1.89   | 5.40 (1.8 - 6.8)         | 1.35 (0.50 - 2.06)    | 4.00 | 5.4           | 6.8     | A++  |
|            | 7 9 12                     | 1.46              | 1.72   | 2.22   | 5.40 (1.8 - 6.8)         | 1.35 (0.50 - 2.06)    | 4.00 | 5.4           | 6.7     | A++  |
|            | 7 9 14                     | 1.35              | 1.58   | 2.47   | 5.40 (2.0 - 6.8)         | 1.35 (0.60 - 2.06)    | 4.00 | 5.4           | 6.7     | A++  |
|            | 9 9 9                      | 1.80              | 1.80   | 1.80   | 5.40 (1.8 - 6.8)         | 1.35 (0.50 - 2.06)    | 4.00 | 5.4           | 6.8     | A++  |
|            | 9 9 12                     | 1.64              | 1.64   | 2.12   | 5.40 (1.8 - 6.8)         | 1.35 (0.50 - 2.06)    | 4.00 | 5.4           | 6.7     | A++  |
|            | 7 7 14                     | 2.23              | 2.23   | 2.23   | 6.70 (1.8 - 7.4)         | 1.89 (0.50 - 2.37)    | 3.54 | 6.7           | 6.4     | A++  |
|            | 7 7 17                     | 2.14              | 2.14   | 2.52   | 6.80 (1.8 - 7.8)         | 1.94 (0.60 - 2.87)    | 3.51 | 6.8           | 6.4     | A++  |

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h models

- The above is the value for connecting with Wall Mounted type.
- 2 or more indoor units should be connected.
- Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).
- Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
- The total ability of connectable indoor units is up to 36000Btu from 14000Btu.

\*1: When ASYG18L is connected, connect at least 1 wall mounted type of 9000Btu.

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h models

- The above is the value for connecting with Wall Mounted type.
- 2 or more indoor units should be connected.
- Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).
- Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
- The total ability of connectable indoor units is up to 36000Btu from 14000Btu.

Note: \*1: When ASYG18L is connected, connect at least 1 wall mounted type of 9000Btu.

## 2 Rooms Multi heating

| AOYG14LAC2 | Combination of Indoor Unit | HEATING OPERATION |        |                          |                       |      |               |     |         |                         |
|------------|----------------------------|-------------------|--------|--------------------------|-----------------------|------|---------------|-----|---------|-------------------------|
|            |                            | Heating Capacity  |        |                          | Input Power (min-max) | EER  | Seasonal Data |     |         |                         |
|            |                            | Room 1            | Room 2 | Total Capacity (min-max) |                       |      | kW            | kW  | Pdesign | Energy efficiency class |
| 2 Room     | 7 7                        | 2.20              | 2.20   | 4.40 (1.1 - 5.4)         | 1.03 (0.25 - 1.78)    | 4.27 | 3.8           | 4.1 | A+      |                         |
|            | 7 9                        | 2.15              | 2.25   | 4.40 (1.1 - 5.4)         | 1.03 (0.25 - 1.78)    | 4.27 | 3.8           | 4.1 | A+      |                         |
|            | 7 12                       | 1.95              | 2.45   | 4.40 (1.1 - 5.5)         | 1.02 (0.25 - 1.76)    | 4.31 | 3.8           | 4.0 | A+      |                         |
|            | 9 9                        | 2.20              | 2.20   | 4.40 (1.1 - 5.4)         | 1.03 (0.25 - 1.78)    | 4.27 | 3.8           | 4.0 | A+      |                         |
|            | 9 12                       | 2.00              | 2.40   | 4.40 (1.1 - 5.5)         | 1.02 (0.25 - 1.76)    | 4.31 | 3.8           | 4.0 | A+      |                         |
|            |                            |                   |        |                          |                       |      |               |     |         |                         |

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h models

- The above is the value for connecting with Wall Mounted type.
- 2 or more indoor units should be connected.
- Heating capacity is based on 20°CDB (indoor temperature), 7°CDB/6°CWB (outdoor temperature).
- Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
- The Total ability of connected indoor unit is up to 21000Btu from 14000Btu.

\*The above is the value for connecting with Wall Mounted type.

| AOYG18LAC2 | Combination of Indoor Unit | HEATING OPERATION |        |                          |                       |      |               |     |         |                         |
|------------|----------------------------|-------------------|--------|--------------------------|-----------------------|------|---------------|-----|---------|-------------------------|
|            |                            | Heating Capacity  |        |                          | Input Power (min-max) | EER  | Seasonal Data |     |         |                         |
|            |                            | Room 1            | Room 2 | Total Capacity (min-max) |                       |      | kW            | kW  | Pdesign | Energy efficiency class |
| 2 Room     | 7 7                        | 2.70              | 2.70   | 5.40 (1.8 - 6.0)         | 1.24 (0.50 - 1.61)    | 4.37 | 3.8           | 4.1 | A+      |                         |
|            | 7 9                        | 2.50              | 3.00   | 5.50 (1.8 - 6.0)         | 1.36 (0.50 - 1.87)    | 4.04 | 4.0           | 4.1 | A+      |                         |
|            | 7 12                       | 2.30              | 3.30   | 5.60 (1.8 - 6.1)         | 1.38 (0.50 - 1.88)    | 4.06 | 4.2           | 4.0 | A+      |                         |
|            | 7 14                       | 2.25              | 3.35   | 5.60 (1.9 - 6.2)         | 1.35 (0.55 - 1.86)    | 4.15 | 4.2           | 4.0 | A+      |                         |
|            | 9 9                        | 2.80              | 2.80   | 5.60 (1.8 - 6.1)         | 1.41 (0.50 - 1.90)    | 3.97 | 4.2           | 4.1 | A+      |                         |
|            | 9 12                       | 2.45              | 3.15   | 5.60 (1.8 - 6.2)         | 1.38 (0.50 - 1.88)    | 4.07 | 4.2           | 4.0 | A+      |                         |
|            | 9 14                       | 2.35              | 3.25   | 5.60 (1.9 - 6.3)         | 1.35 (0.55 - 1.86)    | 4.15 | 4.2           | 4.0 | A+      |                         |
|            | 12 12                      | 2.80              | 2.80   | 5.60 (1.8 - 6.3)         | 1.34 (0.50 - 1.84)    | 4.18 | 4.2           | 4.0 | A+      |                         |
|            |                            |                   |        |                          |                       |      |               |     |         |                         |

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h models

- The above is the value for connecting with Wall Mounted type.
- 2 or more indoor units should be connected.
- Heating capacity is based on 20°CDB (indoor temperature), 7°CDB/6°CWB (outdoor temperature).
- Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
- The Total ability of connected indoor unit is up to 24000Btu from 14000Btu.
- Where "14" means "wall mounted type" only models. Other types of indoor units can not be connected.

## 3 Rooms Multi heating

| AOYG18LAT3 | Combination of Indoor Unit | HEATING OPERATION |        |        |                       |                    |               |     |         |                         |
|------------|----------------------------|-------------------|--------|--------|-----------------------|--------------------|---------------|-----|---------|-------------------------|
|            |                            | Heating Capacity  |        |        | Input Power (min-max) | EER                | Seasonal Data |     |         |                         |
|            |                            | Room 1            | Room 2 | Room 3 |                       |                    | kW            | kW  | Pdesign | Energy efficiency class |
| 2 Room     | 7 7 -                      | 2.70              | 2.70   | -      | 5.40 (2.0 - 6.1)      | 1.59 (0.52 - 1.93) | 3.40          | 4.0 | 4.1     | A+                      |
|            | 7 9 -                      | 2.75              | 3.25   | -      | 6.00 (2.0 - 6.4)      | 1.87 (0.52 - 2.06) | 3.21          | 4.0 | 4.1     | A+                      |
|            | 7 12 -                     | 2.59              | 3.71   | -      | 6.30 (2.0 - 6.5)      | 1.98 (0.52 - 2.06) | 3.18          | 4.0 | 4.1     | A+                      |
|            | 7 14 -                     | 2.51              | 4.29   | -      | 6.80 (2.0 - 7.1)      | 1.92 (0.50 - 2.06) | 3.54          | 4.0 | 4.1     | A+                      |
|            | 9 9 -                      | 3.15              | 3.15   | -      | 6.30 (2.0 - 6.5)      | 1.98 (0.52 - 2.06) | 3.18          | 4.0 | 4.1     | A+                      |
|            | 9 12 -                     | 2.89              | 3.51   | -      | 6.40 (2.0 - 6.6)      | 1.99 (0.52 - 2.06) | 3.22          | 4.0 | 4.1     | A+                      |
|            | 9 14 -                     | 2.77              | 4.03   | -      | 6.80 (2.0 - 7.2)      | 1.91 (0.50 - 2.06) | 3.56          | 4.0 | 4.1     | A+                      |
|            | 12 12 -                    | 3.20              | 3.20   | -      | 6.40 (2.0 - 6.6)      | 1.98 (0.52 - 2.06) | 3.23          | 4.0 | 4.1     | A+                      |
|            | 12 14 -                    | 3.09              | 3.71   | -      | 6.80 (2.0 - 7.3)      | 1.90 (0.50 - 2.06) | 3.58          | 4.0 | 4.1     | A+                      |
|            |                            |                   |        |        |                       |                    |               |     |         |                         |
| 3 Room     | 7 7 7                      | 2.27              | 2.27   | 2.27   | 6.80 (2.0 - 7.7)      | 1.62 (0.50 - 2.06) | 4.20          | 5.0 | 4.3     | A+                      |
|            | 7 7 9                      | 2.14              | 2.14   | 2.52   | 6.80 (2.0 - 7.8)      | 1.62 (0.50 - 2.06) | 4.20          | 5.0 | 4.3     | A+                      |
|            | 7 7 12                     | 1.98              | 1.98   | 2.83   | 6.80 (2.0 - 7.8)      | 1.59 (0.50 - 2.06) | 4.28          | 5.0 | 4.3     | A+                      |
|            | 7 7 14                     | 1.83              | 1.83   | 3.14   | 6.80 (2.0 - 8.0)      | 1.61 (0.50 - 2.06) | 4.22          | 5.0 | 4.3     | A+                      |
|            | 7 9 9                      | 2.03              | 2.39   | 2.39   | 6.80 (2.0 - 7.8)      | 1.60 (0.50 - 2.06) | 4.25          | 5.0 | 4.3     | A+                      |
|            | 7 9 12                     | 1.89              | 2.22   | 2.69   | 6.80 (2.0 - 7.9)      | 1.59 (0.50 - 2.06) | 4.28          | 5.0 | 4.3     | A+                      |
|            | 7 9 14                     | 1.75              | 2.06   | 2.99   | 6.80 (2.0 - 8.0)      | 1.60 (0.50 - 2.06) | 4.25          | 5.0 | 4.3     | A+                      |
|            | 9 9 9                      | 2.27              | 2.27   | 2.27   | 6.80 (2.0 - 7.9)      | 1.59 (0.50 - 2.06) | 4.28          | 5.0 | 4.3     | A+                      |
|            | 9 9 12                     | 2.12              | 2.12   | 2.57   | 6.80 (2.0 - 7.9)      | 1.59 (0.50 - 2.06) | 4.28          | 5.0 | 4.3     | A+                      |
|            |                            |                   |        |        |                       |                    |               |     |         |                         |

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h models

- The above is the value for connecting with Wall Mounted type.
- 2 or more indoor units should be connected.
- Heating capacity is based on 20°CDB (indoor temperature), 7°CDB/6°CWB (outdoor temperature).
- Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
- The Total ability of connected indoor unit is up to 36000Btu from 14000Btu.
- \*1: When ASYG18L is connected, connect at least 1 wall mounted type for 9000Btu.

## PRODUCT LINEUP: MULTI SPLIT

# MULTI SPLIT Combination Table for 4 Rooms-Cooling/Heating

### 4 Rooms Multi cooling

| AOYG30LAT4 | Combination of Indoor Unit | COOLING OPERATION |        |        |        |                       |                    |                          |     |         |      |         |    | EER  | Seasonal Data           |  |  |
|------------|----------------------------|-------------------|--------|--------|--------|-----------------------|--------------------|--------------------------|-----|---------|------|---------|----|------|-------------------------|--|--|
|            |                            | Cooling Capacity  |        |        |        | Input Power (min-max) | kW                 | Seasonal Data            |     |         |      | Pdesign | kW | SEER | Energy efficiency class |  |  |
|            |                            | Room 1            | Room 2 | Room 3 | Room 4 |                       |                    | Total Capacity (min-max) | kW  | Pdesign | SEER |         |    |      |                         |  |  |
| 3 Room     | 7 7 14 -                   | 1.96              | 1.96   | 3.27   | -      | 7.20 (1.6 - 8.9)      | 2.22 (0.68 - 3.43) | 3.24                     | 7.2 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 7 7 18 -                   | 1.81              | 1.81   | 4.08   | -      | 7.70 (2.8 - 10.0)     | 2.22 (0.98 - 3.55) | 3.47                     | 7.7 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 7 7 24 -                   | 1.61              | 1.61   | 4.57   | -      | 7.80 (2.8 - 10.1)     | 2.19 (0.98 - 3.53) | 3.56                     | 7.8 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 7 9 12 -                   | 2.08              | 2.34   | 2.78   | -      | 7.20 (1.6 - 8.9)      | 2.22 (0.68 - 3.41) | 3.24                     | 7.2 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 7 9 14 -                   | 1.90              | 2.14   | 3.16   | -      | 7.20 (2.8 - 9.1)      | 2.22 (0.98 - 3.56) | 3.24                     | 7.2 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 7 9 18 -                   | 1.76              | 1.98   | 3.96   | -      | 7.70 (2.8 - 9.9)      | 2.22 (0.98 - 3.56) | 3.47                     | 7.7 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 7 9 24 -                   | 1.57              | 1.77   | 4.46   | -      | 7.80 (2.8 - 10.1)     | 2.19 (0.98 - 3.53) | 3.56                     | 7.8 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 7 12 12 -                  | 1.96              | 2.62   | 2.62   | -      | 7.20 (1.6 - 9.1)      | 2.22 (0.68 - 3.54) | 3.24                     | 7.2 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 7 12 14 -                  | 1.83              | 2.43   | 3.04   | -      | 7.30 (2.8 - 9.2)      | 2.22 (0.98 - 3.56) | 3.29                     | 7.3 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 7 12 18 -                  | 1.68              | 2.24   | 3.78   | -      | 7.70 (2.8 - 9.9)      | 2.22 (0.98 - 3.56) | 3.47                     | 7.7 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 7 12 24 -                  | 1.51              | 2.01   | 4.28   | -      | 7.80 (2.8 - 10.1)     | 2.19 (0.98 - 3.56) | 3.56                     | 7.8 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 7 14 14 -                  | 1.68              | 2.81   | 2.81   | -      | 7.30 (2.8 - 9.3)      | 2.22 (0.98 - 3.58) | 3.29                     | 7.3 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 7 14 18 -                  | 1.57              | 2.61   | 3.52   | -      | 7.70 (3.5 - 10.0)     | 2.22 (1.17 - 3.58) | 3.47                     | 7.7 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 7 14 24 -                  | 1.44              | 2.39   | 4.07   | -      | 7.90 (3.5 - 10.1)     | 2.20 (1.17 - 3.58) | 3.59                     | 7.9 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 7 18 18 -                  | 1.42              | 3.19   | 3.19   | -      | 7.80 (3.5 - 10.1)     | 2.22 (1.17 - 3.58) | 3.51                     | 7.8 | 5.7     | A+   |         |    |      |                         |  |  |
|            | 7 18 24 -                  | 1.30              | 2.92   | 3.68   | -      | 7.90 (4.7 - 10.1)     | 2.22 (1.27 - 3.58) | 3.56                     | 7.9 | 5.7     | A+   |         |    |      |                         |  |  |
|            | 9 9 9 -                    | 2.40              | 2.40   | 2.40   | -      | 7.20 (2.8 - 8.9)      | 2.22 (0.98 - 3.42) | 3.24                     | 7.2 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 9 9 12 -                   | 2.26              | 2.26   | 2.68   | -      | 7.20 (2.8 - 9.1)      | 2.22 (0.98 - 3.54) | 3.24                     | 7.2 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 9 9 14 -                   | 2.10              | 2.10   | 3.11   | -      | 7.30 (2.8 - 9.2)      | 2.22 (0.98 - 3.57) | 3.29                     | 7.3 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 9 9 18 -                   | 1.93              | 1.93   | 3.85   | -      | 7.70 (2.8 - 9.9)      | 2.22 (0.98 - 3.56) | 3.47                     | 7.7 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 9 9 24 -                   | 1.73              | 1.73   | 4.35   | -      | 7.80 (2.8 - 10.1)     | 2.20 (1.17 - 3.54) | 3.55                     | 7.8 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 9 12 12 -                  | 2.14              | 2.53   | 2.53   | -      | 7.20 (2.8 - 9.1)      | 2.22 (0.98 - 3.54) | 3.24                     | 7.2 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 9 12 14 -                  | 1.99              | 2.36   | 2.95   | -      | 7.30 (2.8 - 9.2)      | 2.22 (0.98 - 3.57) | 3.29                     | 7.3 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 9 12 18 -                  | 1.84              | 2.18   | 3.68   | -      | 7.70 (2.8 - 9.9)      | 2.22 (0.98 - 3.56) | 3.47                     | 7.7 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 9 12 24 -                  | 1.66              | 1.97   | 4.18   | -      | 7.80 (2.8 - 10.1)     | 2.19 (0.98 - 3.56) | 3.56                     | 7.8 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 9 14 14 -                  | 1.84              | 2.73   | 2.73   | -      | 7.30 (3.5 - 9.3)      | 2.22 (1.17 - 3.58) | 3.29                     | 7.3 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 9 14 18 -                  | 1.74              | 2.58   | 3.48   | -      | 7.80 (3.5 - 10.0)     | 2.22 (1.17 - 3.58) | 3.51                     | 7.8 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 9 14 24 -                  | 1.58              | 2.34   | 3.98   | -      | 7.90 (3.5 - 10.1)     | 2.22 (1.27 - 3.56) | 3.56                     | 7.9 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 9 18 18 -                  | 1.56              | 3.12   | 3.12   | -      | 7.80 (4.7 - 10.1)     | 2.22 (1.27 - 3.58) | 3.51                     | 7.8 | 5.7     | A+   |         |    |      |                         |  |  |
|            | 12 12 12 -                 | 2.43              | 2.43   | 2.43   | -      | 7.30 (2.8 - 9.2)      | 2.22 (0.98 - 3.55) | 3.29                     | 7.3 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 12 12 14 -                 | 2.28              | 2.28   | 2.85   | -      | 7.40 (2.8 - 9.3)      | 2.22 (0.98 - 3.58) | 3.33                     | 7.4 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 12 12 18 -                 | 2.12              | 2.12   | 3.57   | -      | 7.80 (3.5 - 10.0)     | 2.22 (1.17 - 3.57) | 3.51                     | 7.8 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 12 12 24 -                 | 1.92              | 1.92   | 4.07   | -      | 7.90 (3.5 - 10.1)     | 2.20 (1.17 - 3.54) | 3.59                     | 7.9 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 12 14 14 -                 | 2.11              | 2.64   | 2.64   | -      | 7.40 (3.5 - 9.4)      | 2.22 (1.17 - 3.58) | 3.33                     | 7.4 | 5.9     | A+   |         |    |      |                         |  |  |
|            | 12 14 18 -                 | 1.98              | 2.48   | 3.34   | -      | 7.80 (3.5 - 10.1)     | 2.22 (1.17 - 3.58) | 3.51                     | 7.8 | 5.8     | A+   |         |    |      |                         |  |  |
|            | 12 18 18 -                 | 1.81              | 3.05   | 3.05   | -      | 7.90 (4.7 - 10.1)     | 2.22 (1.27 - 3.58) | 3.56                     | 7.9 | 5.7     | A+   |         |    |      |                         |  |  |
|            | 7 7 7 7 -                  | 1.93              | 1.93   | 1.93   | 1.93   | 7.70 (1.6 - 9.6)      | 2.20 (0.68 - 3.41) | 3.50                     | 7.7 | 6.2     | A++  |         |    |      |                         |  |  |
|            | 7 7 7 9 -                  | 1.89              | 1.89   | 2.13   | 1.89   | 7.80 (1.6 - 9.8)      | 2.22 (0.68 - 3.54) | 3.51                     | 7.8 | 6.2     | A++  |         |    |      |                         |  |  |
|            | 7 7 7 12 -                 | 1.83              | 1.83   | 2.41   | 1.83   | 7.90 (1.6 - 9.9)      | 2.22 (0.68 - 3.54) | 3.56                     | 7.9 | 6.1     | A++  |         |    |      |                         |  |  |
|            | 7 7 7 14 -                 | 1.70              | 1.70   | 2.80   | 1.70   | 7.90 (2.8 - 9.9)      | 2.22 (0.98 - 3.56) | 3.56                     | 7.9 | 6.1     | A++  |         |    |      |                         |  |  |
|            | 7 7 7 18 -                 | 1.52              | 1.52   | 3.43   | 1.52   | 8.00 (2.8 - 10.1)     | 2.20 (0.98 - 3.55) | 3.64                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 7 7 24 -                 | 1.50              | 2.09   | 2.09   | 1.86   | 7.90 (2.8 - 9.7)      | 2.22 (0.98 - 3.42) | 3.56                     | 7.9 | 6.2     | A++  |         |    |      |                         |  |  |
|            | 7 7 9 12 -                 | 1.78              | 1.99   | 2.35   | 1.99   | 7.90 (2.8 - 9.9)      | 2.22 (0.98 - 3.55) | 3.56                     | 7.9 | 6.1     | A++  |         |    |      |                         |  |  |
|            | 7 7 9 14 -                 | 1.68              | 1.88   | 2.76   | 1.68   | 8.00 (2.8 - 10.0)     | 2.22 (0.98 - 3.57) | 3.60                     | 8.0 | 6.1     | A++  |         |    |      |                         |  |  |
|            | 7 7 9 18 -                 | 1.49              | 1.49   | 3.35   | 1.67   | 8.00 (3.5 - 10.1)     | 2.20 (1.17 - 3.55) | 3.64                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 7 12 12 -                | 1.72              | 1.72   | 2.28   | 1.72   | 8.00 (2.8 - 10.0)     | 2.22 (0.98 - 3.55) | 3.60                     | 8.0 | 6.1     | A++  |         |    |      |                         |  |  |
|            | 7 7 12 14 -                | 1.61              | 1.61   | 2.13   | 2.13   | 8.00 (2.8 - 10.0)     | 2.22 (0.98 - 3.57) | 3.60                     | 8.0 | 6.1     | A++  |         |    |      |                         |  |  |
|            | 7 7 12 18 -                | 1.43              | 1.43   | 2.32   | 1.91   | 8.00 (3.5 - 10.1)     | 2.20 (1.17 - 3.56) | 3.64                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 7 14 14 -                | 1.50              | 2.50   | 2.50   | 1.86   | 8.00 (3.5 - 10.1)     | 2.22 (1.17 - 3.58) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 7 14 18 -                | 1.35              | 1.35   | 2.25   | 2.04   | 8.00 (3.5 - 10.0)     | 2.22 (1.17 - 3.58) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 9 9 9 -                  | 1.81              | 2.03   | 2.03   | 1.81   | 7.90 (2.8 - 9.9)      | 2.22 (0.98 - 3.56) | 3.56                     | 7.9 | 6.2     | A++  |         |    |      |                         |  |  |
|            | 7 9 9 12 -                 | 1.76              | 1.96   | 2.32   | 1.96   | 8.00 (2.8 - 10.0)     | 2.22 (0.98 - 3.56) | 3.60                     | 8.0 | 6.1     | A++  |         |    |      |                         |  |  |
|            | 7 9 9 14 -                 | 1.64              | 1.83   | 2.70   | 1.83   | 8.00 (3.5 - 10.1)     | 2.22 (1.17 - 3.58) | 3.60                     | 8.0 | 6.1     | A++  |         |    |      |                         |  |  |
|            | 7 9 9 18 -                 | 1.45              | 1.64   | 3.27   | 1.64   | 8.00 (3.5 - 10.1)     | 2.22 (1.17 - 3.56) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 9 9 24 -                 | 1.68              | 1.88   | 2.22   | 2.22   | 8.00 (2.8 - 10.0)     | 2.22 (0.98 - 3.56) | 3.60                     | 8.0 | 6.1     | A++  |         |    |      |                         |  |  |
|            | 7 9 12 14 -                | 1.57              | 1.76   | 2.08   | 1.57   | 7.59 (3.5 - 10.1)     | 2.22 (1.17 - 3.58) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 9 12 18 -                | 1.40              | 1.58   | 2.15   | 1.87   | 8.00 (3.5 - 10.1)     | 2.22 (1.17 - 3.56) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 9 12 24 -                | 1.32              | 1.49   | 2.21   | 1.88   | 8.00 (4.7 - 10.1)     | 2.22 (1.27 - 3.57) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 12 12 12 -               | 1.61              | 2.13   | 2.13   | 2.13   | 8.00 (2.8 - 10.1)     | 2.22 (0.98 - 3.56) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 12 12 14 -               | 1.51              | 2.00   | 2.49   | 2.00   | 8.00 (3.5 - 10.1)     | 2.22 (1.17 - 3.58) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 12 12 18 -               | 1.35              | 1.80   | 3.04   | 1.80   | 8.00 (3.5 - 10.1)     | 2.22 (1.17 - 3.56) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 7 12 14 14 -               | 1.41              | 1.89   | 2.35   | 2.35   | 8.00 (3.5 - 10.1)     | 2.22 (1.17 - 3.58) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 9 9 9 9 -                  | 2.00              | 2.00   | 2.00   | 1.91   | 8.00 (3.5 - 10.0)     | 2.22 (1.17 - 3.56) | 3.60                     | 8.0 | 6.2     | A++  |         |    |      |                         |  |  |
|            | 9 9 9 12 -                 | 1.91              | 1.91   | 2.27   | 1.91   | 8.00 (3.5 - 10.0)     | 2.22 (1.17 - 3.56) | 3.60                     | 8.0 | 6.1     | A++  |         |    |      |                         |  |  |
|            | 9 9 9 14 -                 | 1.79              | 1.79   | 2.63   | 1.83   | 8.00 (3.5 - 10.0)     | 2.22 (1.17 - 3.56) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 9 9 9 18* -                | 1.60              | 1.60   | 3.20   | 1.60   | 8.00 (4.7 - 10.0)     | 2.22 (1.17 - 3.56) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 9 9 9 12 -                 | 1.83              | 1.83   | 2.17   | 1.83   | 8.00 (3.5 - 10.0)     | 2.22 (1.17 - 3.56) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 9 9 9 14 -                 | 1.72              | 2.03   | 2.53   | 1.83   | 8.00 (3.5 - 10.0)     | 2.22 (1.17 - 3.56) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 9 9 9 18** -               | 1.54              | 1.54   | 3.09   | 1.83   | 8.00 (4.7 - 10.0)     | 2.22 (1.17 - 3.56) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 9 9 12 12 -                | 1.62              | 1.62   | 2.38   | 1.62   | 8.00 (3.5 - 10.0)     | 2.22 (1.17 - 3.56) | 3.60                     | 8.0 | 6.0     | A++  |         |    |      |                         |  |  |
|            | 9 12 12 12 -               | 1.76              | 2.08</ |        |        |                       |                    |                          |     |         |      |         |    |      |                         |  |  |

## 4 Rooms Multi heating

| AOYG30LAT4 | Combination<br>of Indoor Unit | HEATING OPERATION |              |              |              |                                |                       |      |               |      | EER                        | Seasonal Data |  |  |
|------------|-------------------------------|-------------------|--------------|--------------|--------------|--------------------------------|-----------------------|------|---------------|------|----------------------------|---------------|--|--|
|            |                               | Heating Capacity  |              |              |              |                                | Input Power (min-max) |      | Pdesign<br>kW | SEER | Energy<br>efficiency class |               |  |  |
|            |                               | Room 1<br>kW      | Room 2<br>kW | Room 3<br>kW | Room 4<br>kW | Total Capacity (min-max)<br>kW |                       |      |               |      |                            |               |  |  |
| 3 Room     | 7   7   14   -                | 2.42              | 2.42         | 4.15         | -            | 9.00 (1.8 - 10.1)              | 2.66 (0.58 - 3.53)    | 3.38 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   7   18   -                | 2.27              | 2.27         | 4.86         | -            | 9.40 (3.3 - 11.2)              | 2.46 (0.87 - 3.52)    | 3.82 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   7   24   -                | 2.03              | 2.03         | 5.44         | -            | 9.50 (3.3 - 11.5)              | 2.47 (0.87 - 3.52)    | 3.85 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   9   12   -                | 2.49              | 2.94         | 3.56         | -            | 9.00 (1.8 - 10.0)              | 2.69 (0.58 - 3.51)    | 3.35 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   9   14   -                | 2.33              | 2.75         | 4.00         | -            | 9.10 (3.3 - 10.2)              | 2.64 (0.87 - 3.50)    | 3.45 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   9   18   -                | 2.17              | 2.56         | 4.66         | -            | 9.40 (3.3 - 11.3)              | 2.45 (0.87 - 3.50)    | 3.84 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   9   24   -                | 1.98              | 2.33         | 5.29         | -            | 9.60 (3.3 - 11.5)              | 2.46 (0.87 - 3.51)    | 3.90 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   12   12   -               | 2.33              | 3.33         | 3.33         | -            | 9.00 (1.8 - 10.1)              | 2.66 (0.58 - 3.48)    | 3.38 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   12   14   -               | 2.22              | 3.17         | 3.80         | -            | 9.20 (3.3 - 10.3)              | 2.62 (0.87 - 3.48)    | 3.51 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   12   18   -               | 2.08              | 2.97         | 4.45         | -            | 9.50 (3.3 - 11.4)              | 2.44 (0.87 - 3.47)    | 3.89 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   12   24   -               | 1.88              | 2.69         | 5.03         | -            | 9.60 (3.3 - 11.7)              | 2.45 (0.87 - 3.56)    | 3.92 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   14   14   -               | 2.10              | 3.60         | 3.60         | -            | 9.30 (3.3 - 10.6)              | 2.59 (0.87 - 3.48)    | 3.59 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   14   18   -               | 1.96              | 3.35         | 4.19         | -            | 9.50 (3.7 - 11.5)              | 2.42 (0.97 - 3.52)    | 3.93 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   14   24   -               | 1.78              | 3.05         | 4.77         | -            | 9.60 (3.3 - 11.7)              | 2.45 (0.87 - 3.56)    | 3.92 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   18   18   -               | 1.82              | 3.89         | 3.89         | -            | 9.60 (3.7 - 12.0)              | 2.40 (0.97 - 3.52)    | 4.00 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   18   24   -               | 1.65              | 3.53         | 4.42         | -            | 9.60 (4.3 - 12.0)              | 2.40 (1.12 - 3.52)    | 4.00 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   9   9   -                 | 3.00              | 3.00         | 3.00         | -            | 9.00 (3.3 - 10.0)              | 2.69 (0.87 - 3.51)    | 3.35 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   9   12   -                | 2.80              | 2.80         | 3.39         | -            | 9.00 (3.3 - 10.1)              | 2.67 (0.87 - 3.48)    | 3.37 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   9   14   -                | 2.66              | 2.66         | 3.87         | -            | 9.20 (3.3 - 10.3)              | 2.63 (0.87 - 3.48)    | 3.50 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   9   18   -                | 2.49              | 2.49         | 4.52         | -            | 9.50 (3.7 - 11.4)              | 2.44 (0.97 - 3.48)    | 3.89 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   9   24   -                | 2.25              | 2.25         | 5.11         | -            | 9.60 (3.7 - 11.7)              | 2.45 (0.97 - 3.57)    | 3.92 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   12   12   -               | 2.65              | 3.22         | 3.22         | -            | 9.10 (3.3 - 10.3)              | 2.65 (0.87 - 3.52)    | 3.43 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   12   14   -               | 2.53              | 3.07         | 3.69         | -            | 9.30 (3.3 - 10.5)              | 2.61 (0.87 - 3.52)    | 3.56 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   12   18   -               | 2.36              | 2.86         | 4.29         | -            | 9.50 (3.7 - 11.4)              | 2.43 (0.97 - 3.47)    | 3.91 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   12   24   -               | 2.14              | 2.59         | 4.86         | -            | 9.60 (3.7 - 11.8)              | 2.44 (0.97 - 3.55)    | 3.93 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   14   14   -               | 2.38              | 3.46         | 3.46         | -            | 9.30 (3.7 - 10.7)              | 2.58 (0.97 - 3.46)    | 3.60 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   14   18   -               | 2.22              | 3.23         | 4.04         | -            | 9.50 (3.7 - 11.6)              | 2.41 (0.97 - 3.51)    | 3.94 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   14   24   -               | 2.03              | 2.95         | 4.62         | -            | 9.60 (4.3 - 11.9)              | 2.42 (1.12 - 3.57)    | 3.97 | 5.8           | 3.8  | A                          |               |  |  |
|            | 9   18   18   -               | 2.07              | 3.76         | 3.76         | -            | 9.60 (4.3 - 12.0)              | 2.40 (1.12 - 3.52)    | 4.00 | 5.8           | 3.8  | A                          |               |  |  |
|            | 12   12   12   -              | 3.07              | 3.07         | 3.07         | -            | 9.20 (3.3 - 10.3)              | 2.63 (0.87 - 3.49)    | 3.50 | 5.8           | 3.8  | A                          |               |  |  |
|            | 12   12   14   -              | 2.91              | 2.91         | 3.49         | -            | 9.30 (3.3 - 10.6)              | 2.59 (0.87 - 3.49)    | 3.59 | 5.8           | 3.8  | A                          |               |  |  |
|            | 12   12   18   -              | 2.71              | 2.71         | 4.07         | -            | 9.50 (3.7 - 11.6)              | 2.42 (0.97 - 3.52)    | 3.93 | 5.8           | 3.8  | A                          |               |  |  |
|            | 12   12   24   -              | 2.48              | 2.48         | 4.65         | -            | 9.60 (3.7 - 11.8)              | 2.43 (0.97 - 3.54)    | 3.95 | 5.8           | 3.8  | A                          |               |  |  |
|            | 12   14   14   -              | 2.36              | 3.32         | 3.32         | -            | 9.40 (3.7 - 10.8)              | 2.40 (0.97 - 3.50)    | 3.92 | 5.8           | 3.8  | A                          |               |  |  |
|            | 12   14   18   -              | 2.37              | 3.08         | 3.85         | -            | 9.50 (3.7 - 11.6)              | 2.40 (0.97 - 3.49)    | 3.96 | 5.8           | 3.8  | A                          |               |  |  |
|            | 12   18   18   -              | 2.40              | 3.60         | 3.60         | -            | 9.60 (4.3 - 12.0)              | 2.40 (1.12 - 3.52)    | 4.00 | 5.8           | 3.8  | A                          |               |  |  |
|            | 7   7   7   7   -             | 2.35              | 2.35         | 2.35         | -            | 9.40 (1.8 - 10.8)              | 2.43 (0.87 - 3.47)    | 3.87 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   7   9   -             | 2.27              | 2.27         | 2.27         | -            | 9.50 (1.8 - 10.9)              | 2.42 (0.85 - 3.51)    | 3.88 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   7   12   -            | 2.14              | 2.14         | 3.06         | -            | 9.50 (1.8 - 11.1)              | 2.41 (0.85 - 3.55)    | 3.94 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   7   14   -            | 2.04              | 2.04         | 3.49         | -            | 9.60 (3.3 - 11.3)              | 2.38 (0.87 - 3.56)    | 4.03 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   7   18   -            | 1.87              | 1.87         | 4.00         | -            | 9.60 (3.3 - 12.0)              | 2.27 (0.87 - 3.56)    | 4.23 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   9   9   -             | 2.18              | 2.18         | 2.57         | -            | 9.50 (3.3 - 10.9)              | 2.41 (0.87 - 3.44)    | 3.94 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   9   12   -            | 2.06              | 2.43         | 2.95         | -            | 9.50 (3.3 - 11.1)              | 2.40 (0.87 - 3.54)    | 3.96 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   9   14   -            | 1.96              | 2.31         | 3.36         | -            | 9.60 (3.3 - 11.4)              | 2.38 (0.87 - 3.54)    | 4.03 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   9   18   -            | 1.80              | 1.80         | 2.13         | -            | 9.60 (3.7 - 12.0)              | 2.27 (0.97 - 3.55)    | 4.23 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   12   12   -           | 1.98              | 1.98         | 2.82         | -            | 9.60 (3.3 - 11.3)              | 2.39 (0.87 - 3.57)    | 4.02 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   12   14   -           | 1.87              | 1.87         | 2.67         | -            | 9.60 (3.3 - 11.5)              | 2.36 (0.87 - 3.58)    | 4.07 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   12   18   -           | 1.72              | 1.72         | 2.46         | -            | 9.60 (3.7 - 12.0)              | 2.27 (0.97 - 3.58)    | 4.23 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   14   14   -           | 1.77              | 1.77         | 3.03         | -            | 9.60 (3.7 - 11.8)              | 2.34 (0.97 - 3.58)    | 4.10 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   7   14   18   -           | 1.64              | 1.64         | 2.81         | -            | 9.60 (3.7 - 12.0)              | 2.27 (0.97 - 3.56)    | 4.23 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   9   9   9   -             | 2.09              | 2.47         | 2.47         | -            | 9.50 (3.3 - 11.2)              | 2.40 (0.87 - 3.54)    | 4.00 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   9   9   12   -            | 2.01              | 2.36         | 2.36         | -            | 9.60 (3.3 - 11.3)              | 2.39 (0.87 - 3.58)    | 4.02 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   9   9   14   -            | 1.89              | 2.23         | 3.25         | -            | 9.60 (3.7 - 11.5)              | 2.37 (0.97 - 3.58)    | 4.05 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   9   9   18   -            | 1.75              | 2.06         | 3.74         | -            | 9.60 (3.7 - 12.0)              | 2.27 (0.97 - 3.58)    | 4.23 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   9   12   12   -           | 1.91              | 2.25         | 2.72         | -            | 9.60 (3.3 - 11.4)              | 2.38 (0.87 - 3.58)    | 4.03 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   9   12   14   -           | 1.80              | 2.13         | 3.09         | -            | 9.60 (3.7 - 11.6)              | 2.35 (0.97 - 3.58)    | 4.09 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   9   12   18   -           | 1.67              | 1.97         | 3.58         | -            | 9.60 (3.7 - 12.0)              | 2.27 (0.97 - 3.58)    | 4.23 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   9   14   14   -           | 1.71              | 2.02         | 2.94         | -            | 9.60 (3.7 - 11.8)              | 2.33 (0.97 - 3.58)    | 4.12 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   9   14   18   -           | 1.59              | 1.87         | 3.41         | -            | 9.60 (4.3 - 12.0)              | 2.27 (1.12 - 3.58)    | 4.23 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   12   12   12   -          | 1.81              | 2.59         | 2.59         | -            | 9.60 (3.3 - 11.5)              | 2.37 (0.87 - 3.58)    | 4.05 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   12   12   14   -          | 1.72              | 2.46         | 2.95         | -            | 9.60 (3.7 - 11.7)              | 2.34 (0.97 - 3.58)    | 4.10 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   12   12   18   -          | 1.60              | 2.29         | 3.43         | -            | 9.60 (3.7 - 12.0)              | 2.27 (0.97 - 3.56)    | 4.23 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 7   12   14   14   -          | 1.64              | 2.34         | 2.81         | -            | 9.60 (3.7 - 11.9)              | 2.32 (0.97 - 3.58)    | 4.14 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 9   9   9   9   -             | 2.40              | 2.40         | 2.40         | -            | 9.60 (3.7 - 11.3)              | 2.40 (0.97 - 3.58)    | 4.00 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 9   9   9   12   -            | 2.28              | 2.28         | 2.76         | -            | 9.60 (3.7 - 11.4)              | 2.38 (0.97 - 3.58)    | 4.03 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 9   9   9   14   -            | 2.16              | 2.16         | 3.14         | -            | 9.60 (3.7 - 11.6)              | 2.36 (0.97 - 3.58)    | 4.07 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 9   9   9   18*   -           | 1.99              | 1.99         | 3.62         | -            | 9.60 (4.3 - 12.0)              | 2.27 (1.12 - 3.58)    | 4.23 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 9   9   12   12   -           | 2.17              | 2.63         | 2.63         | -            | 9.60 (3.7 - 11.5)              | 2.37 (0.97 - 3.58)    | 4.05 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 9   9   12   14   -           | 2.06              | 2.06         | 2.99         | -            | 9.60 (3.7 - 11.7)              | 2.35 (0.97 - 3.58)    | 4.09 | 6.2           | 4.0  | A+                         |               |  |  |
|            | 9   9   12                    |                   |              |              |              |                                |                       |      |               |      |                            |               |  |  |



## 5 Rooms Multi cooling

| AOYG36LBLAS | Combination of Indoor Unit | COOLING OPERATION |              |              |              |                 |                                |                 |      |               |      | Seasonal Data           |  |  |
|-------------|----------------------------|-------------------|--------------|--------------|--------------|-----------------|--------------------------------|-----------------|------|---------------|------|-------------------------|--|--|
|             |                            | Cooling Capacity  |              |              |              |                 | Input Power (min-max)          |                 | EER  | Pdesign<br>kW | SEER | Energy efficiency class |  |  |
|             |                            | Room 1<br>kW      | Room 2<br>kW | Room 3<br>kW | Room 4<br>kW | Room 5<br>kW    | Total Capacity (min-max)<br>kW |                 |      |               |      |                         |  |  |
| 5 Room      | 7 7 7 7 7                  | 2.00              | 2.00         | 2.00         | 2.00         | 2.00            | 10.0 (3.5-12.5)                | 2.44 (0.8-3.88) | 4.10 | 10.0          | 7.0  | A++                     |  |  |
|             | 7 7 7 7 9                  | 1.89              | 1.89         | 1.89         | 1.89         | 2.44            | 10.0 (3.5-12.5)                | 2.44 (0.8-3.88) | 4.10 | 10.0          | 7.0  | A++                     |  |  |
|             | 7 7 7 7 12                 | 1.75              | 1.75         | 1.75         | 1.75         | 3.00            | 10.0 (3.5-12.5)                | 2.43 (0.8-3.88) | 4.11 | 10.0          | 7.0  | A++                     |  |  |
|             | 7 7 7 7 14                 | 1.67              | 1.67         | 1.67         | 1.67         | 3.32            | 10.0 (3.5-12.5)                | 2.42 (0.8-3.88) | 4.13 | 10.0          | 7.0  | A++                     |  |  |
|             | 7 7 7 7 18                 | 1.52              | 1.52         | 1.52         | 1.52         | 3.92            | 10.0 (3.5-12.5)                | 2.41 (0.8-3.88) | 4.15 | 10.0          | 6.9  | A++                     |  |  |
|             | 7 7 7 7 24                 | 1.35              | 1.35         | 1.35         | 1.35         | 4.60            | 10.0 (3.5-12.5)                | 2.39 (0.8-3.88) | 4.19 | 10.0          | 6.9  | A++                     |  |  |
|             | 7 7 7 9 9                  | 1.79              | 1.79         | 1.79         | 2.31         | 2.31            | 10.0 (3.5-12.5)                | 2.43 (0.8-3.88) | 4.11 | 10.0          | 7.0  | A++                     |  |  |
|             | 7 7 7 9 12                 | 1.67              | 1.67         | 2.14         | 2.85         | 10.0 (3.5-12.5) | 2.42 (0.8-3.88)                | 4.13            | 10.0 | 7.0           | A++  |                         |  |  |
|             | 7 7 7 9 14                 | 1.59              | 1.59         | 2.05         | 3.18         | 10.0 (3.5-12.5) | 2.42 (0.8-3.88)                | 4.14            | 10.0 | 7.0           | A++  |                         |  |  |
|             | 7 7 7 9 18                 | 1.46              | 1.46         | 1.46         | 3.74         | 10.0 (3.5-12.5) | 2.40 (0.8-3.88)                | 4.17            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 7 9 24                 | 1.30              | 1.30         | 1.67         | 4.43         | 10.0 (3.5-12.5) | 2.38 (0.8-3.88)                | 4.21            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 7 12 12                | 1.56              | 1.56         | 2.66         | 2.66         | 10.0 (3.5-12.5) | 2.41 (0.8-3.88)                | 4.15            | 10.0 | 7.0           | A++  |                         |  |  |
|             | 7 7 7 12 14                | 1.49              | 1.49         | 2.55         | 2.98         | 10.0 (3.5-12.5) | 2.40 (0.8-3.88)                | 4.16            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 7 12 18                | 1.37              | 1.37         | 2.35         | 3.54         | 10.0 (3.5-12.5) | 2.39 (0.8-3.88)                | 4.19            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 7 14 14                | 1.43              | 1.43         | 2.86         | 2.86         | 10.0 (3.5-12.5) | 2.40 (0.8-3.88)                | 4.17            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 7 14 18                | 1.32              | 1.32         | 2.64         | 3.40         | 10.0 (3.5-12.5) | 2.38 (0.8-3.88)                | 4.20            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 9 9 9                  | 1.70              | 1.70         | 2.20         | 2.20         | 10.0 (3.5-12.5) | 2.43 (0.8-3.88)                | 4.12            | 10.0 | 7.0           | A++  |                         |  |  |
|             | 7 7 9 9 12                 | 1.59              | 2.05         | 2.05         | 2.72         | 10.0 (3.5-12.5) | 2.42 (0.8-3.88)                | 4.14            | 10.0 | 7.0           | A++  |                         |  |  |
|             | 7 7 9 9 14                 | 1.52              | 1.52         | 1.96         | 3.04         | 10.0 (3.5-12.5) | 2.41 (0.8-3.88)                | 4.15            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 9 9 18                 | 1.40              | 1.40         | 1.80         | 3.60         | 10.0 (3.5-12.5) | 2.39 (0.8-3.88)                | 4.18            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 9 9 12 12              | 1.49              | 1.49         | 1.92         | 2.55         | 10.0 (3.5-12.5) | 2.40 (0.8-3.88)                | 4.16            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 9 9 12 18              | 1.43              | 1.43         | 2.45         | 2.85         | 10.0 (3.5-12.5) | 2.40 (0.8-3.88)                | 4.17            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 9 12 14 14             | 1.32              | 1.32         | 1.70         | 3.40         | 10.0 (3.5-12.5) | 2.38 (0.8-3.88)                | 4.20            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 9 14 14                | 1.37              | 1.37         | 1.76         | 2.75         | 10.0 (3.5-12.5) | 2.39 (0.8-3.88)                | 4.19            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 12 12 12               | 1.40              | 1.40         | 2.40         | 2.40         | 10.0 (3.5-12.5) | 2.39 (0.8-3.88)                | 4.18            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 12 12 14               | 1.35              | 1.35         | 2.31         | 2.68         | 10.0 (3.5-12.5) | 2.39 (0.8-3.88)                | 4.19            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 7 12 14 14               | 1.30              | 1.30         | 2.22         | 2.59         | 10.0 (3.5-12.5) | 2.38 (0.8-3.88)                | 4.21            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 9 9 9 9                  | 1.64              | 2.09         | 2.09         | 2.09         | 10.0 (3.5-12.5) | 2.42 (0.8-3.88)                | 4.13            | 10.0 | 7.0           | A++  |                         |  |  |
|             | 7 9 9 9 12                 | 1.52              | 1.96         | 1.96         | 2.60         | 10.0 (3.5-12.5) | 2.41 (0.8-3.88)                | 4.15            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 9 9 9 14                 | 1.46              | 1.88         | 1.88         | 2.90         | 10.0 (3.5-12.5) | 2.40 (0.8-3.88)                | 4.17            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 9 9 9 18                 | 1.35              | 1.73         | 1.73         | 3.46         | 10.0 (3.5-12.5) | 2.39 (0.8-3.88)                | 4.19            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 9 9 12 12                | 1.42              | 1.84         | 1.84         | 2.45         | 10.0 (3.5-12.5) | 2.40 (0.8-3.88)                | 4.17            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 9 9 12 14                | 1.37              | 1.76         | 2.35         | 2.76         | 10.0 (3.5-12.5) | 2.39 (0.8-3.88)                | 4.19            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 9 9 14 14                | 1.32              | 1.70         | 1.70         | 2.64         | 10.0 (3.5-12.5) | 2.38 (0.8-3.88)                | 4.20            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 9 12 12 12               | 1.34              | 1.73         | 2.31         | 2.31         | 10.0 (3.5-12.5) | 2.39 (0.8-3.88)                | 4.19            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 7 9 12 12 14               | 1.30              | 1.67         | 2.22         | 2.22         | 10.0 (3.5-12.5) | 2.38 (0.8-3.88)                | 4.21            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 9 9 9 9 9                  | 2.00              | 2.00         | 2.00         | 2.00         | 2.00            | 10.0 (3.5-12.5)                | 2.41 (0.8-3.88) | 4.15 | 10.0          | 7.0  | A++                     |  |  |
|             | 9 9 9 9 12                 | 1.88              | 1.88         | 1.88         | 2.48         | 10.0 (3.5-12.5) | 2.40 (0.8-3.88)                | 4.17            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 9 9 9 9 14                 | 1.80              | 1.80         | 1.80         | 2.80         | 10.0 (3.5-12.5) | 2.39 (0.8-3.88)                | 4.18            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 9 9 9 9 18                 | 1.67              | 1.67         | 1.67         | 3.32         | 10.0 (3.5-12.5) | 2.38 (0.8-3.88)                | 4.21            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 9 9 9 12 12                | 1.76              | 1.76         | 2.36         | 2.36         | 10.0 (3.5-12.5) | 2.39 (0.8-3.88)                | 4.19            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 9 9 9 12 14                | 1.70              | 1.70         | 1.70         | 2.26         | 10.0 (3.5-12.5) | 2.38 (0.8-3.88)                | 4.20            | 10.0 | 6.9           | A++  |                         |  |  |
|             | 9 9 12 12 12               | 1.67              | 1.67         | 2.22         | 2.22         | 10.0 (3.5-12.5) | 2.38 (0.8-3.88)                | 4.21            | 10.0 | 6.9           | A++  |                         |  |  |

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h / 24:24000Btu/h models


•The above is the value for connecting with Wall Mounted type.

•2 or more indoor units should be connected.

•Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•The Total ability of connected indoor unit is up to 54000Btu from 27000Btu.



## PRODUCT LINEUP: MULTI SPLIT

# MULTI SPLIT Combination Table for 5 Rooms-Heating

### 5 Rooms Multi heating

| AOYG36LBLA5 | Combination<br>of Indoor Unit | HEATING OPERATION |        |        |        |        |                       |                 |               | Seasonal Data |                            |    |
|-------------|-------------------------------|-------------------|--------|--------|--------|--------|-----------------------|-----------------|---------------|---------------|----------------------------|----|
|             |                               | Heating Capacity  |        |        |        |        | Input Power (min-max) | COP             | Pdesign<br>kW | SCOP          | Energy<br>efficiency class |    |
|             |                               | Room 1            | Room 2 | Room 3 | Room 4 | Room 5 |                       |                 |               |               |                            |    |
| 2 Room      | 7 24 - - -                    | 2.40              | 8.40   | -      | -      | -      | 10.8 (3.5-12.4)       | 2.97 (0.7-3.34) | 3.64          | 8.9           | 3.9                        | A  |
|             | 9 24 - - -                    | 3.00              | 8.40   | -      | -      | -      | 11.4 (3.5-13.2)       | 3.15 (0.7-3.58) | 3.62          | 9.0           | 3.9                        | A  |
|             | 12 24 - - -                   | 4.00              | 8.00   | -      | -      | -      | 12.0 (3.5-14.0)       | 3.34 (0.7-3.82) | 3.59          | 9.0           | 4.0                        | A+ |
|             | 14 24 - - -                   | 4.42              | 7.58   | -      | -      | -      | 12.0 (3.5-14.0)       | 3.33 (0.7-3.82) | 3.60          | 9.0           | 4.0                        | A+ |
|             | 18 18 - - -                   | 6.00              | 6.00   | -      | -      | -      | 12.0 (3.5-14.0)       | 3.34 (0.7-3.82) | 3.59          | 9.0           | 4.0                        | A+ |
|             | 18 24 - - -                   | 5.14              | 6.86   | -      | -      | -      | 12.0 (3.5-14.0)       | 3.32 (0.7-3.82) | 3.61          | 9.0           | 4.0                        | A+ |
|             | 24 24 - - -                   | 6.00              | 6.00   | -      | -      | -      | 12.0 (3.5-14.0)       | 3.31 (0.7-3.82) | 3.62          | 9.0           | 4.0                        | A+ |
|             | 7 7 14 - -                    | 2.40              | 2.40   | 4.80   | -      | -      | 9.6 (3.5-11.2)        | 2.45 (0.7-2.98) | 3.92          | 8.8           | 4.0                        | A+ |
|             | 7 7 18 - -                    | 2.40              | 2.40   | 6.00   | -      | -      | 10.8 (3.5-12.8)       | 2.80 (0.7-3.46) | 3.86          | 9.0           | 4.0                        | A+ |
|             | 7 7 24 - -                    | 2.21              | 2.21   | 7.58   | -      | -      | 12.0 (3.5-14.0)       | 3.14 (0.7-3.82) | 3.82          | 9.0           | 4.0                        | A+ |
|             | 7 9 12 - -                    | 2.40              | 3.00   | 4.20   | -      | -      | 9.6 (3.5-11.2)        | 2.45 (0.7-2.98) | 3.92          | 8.8           | 4.0                        | A+ |
|             | 7 9 14 - -                    | 2.40              | 3.00   | 4.80   | -      | -      | 10.2 (3.5-12.0)       | 2.63 (0.7-3.22) | 3.88          | 8.9           | 4.0                        | A+ |
| 3 Room      | 7 9 18 - -                    | 2.40              | 3.00   | 6.00   | -      | -      | 12.0 (3.5-14.0)       | 3.14 (0.7-3.82) | 3.82          | 9.0           | 4.0                        | A+ |
|             | 7 9 24 - -                    | 2.15              | 4.31   | 5.54   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.83          | 9.0           | 4.0                        | A+ |
|             | 7 14 14 - -                   | 1.87              | 3.73   | 6.40   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.84          | 9.0           | 4.0                        | A+ |
|             | 7 18 18 - -                   | 1.96              | 5.02   | 5.02   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.83          | 9.0           | 4.0                        | A+ |
|             | 7 18 24 - -                   | 1.71              | 4.41   | 5.88   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.84          | 9.0           | 4.0                        | A+ |
|             | 9 9 9 - -                     | 3.00              | 3.00   | 3.00   | -      | -      | 9.0 (3.5-10.8)        | 2.29 (0.7-2.86) | 3.93          | 8.8           | 4.0                        | A+ |
|             | 9 9 12 - -                    | 3.00              | 3.00   | 4.20   | -      | -      | 10.2 (3.5-12.0)       | 2.63 (0.7-3.22) | 3.88          | 8.9           | 4.0                        | A+ |
|             | 9 9 14 - -                    | 3.00              | 3.00   | 4.80   | -      | -      | 10.8 (3.5-12.8)       | 2.80 (0.7-3.46) | 3.86          | 9.0           | 4.0                        | A+ |
|             | 9 9 18 - -                    | 3.00              | 3.00   | 6.00   | -      | -      | 12.0 (3.5-14.0)       | 3.14 (0.7-3.82) | 3.82          | 9.0           | 4.0                        | A+ |
|             | 9 9 24 - -                    | 2.57              | 2.57   | 6.86   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.83          | 9.0           | 4.0                        | A+ |
|             | 9 12 12 - -                   | 3.00              | 4.20   | 4.20   | -      | -      | 11.4 (3.5-13.2)       | 2.96 (0.7-3.58) | 3.85          | 9.0           | 4.0                        | A+ |
|             | 9 12 14 - -                   | 3.00              | 4.20   | 4.80   | -      | -      | 12.0 (3.5-14.0)       | 3.14 (0.7-3.82) | 3.82          | 9.0           | 4.0                        | A+ |
|             | 9 12 18 - -                   | 2.77              | 3.69   | 5.54   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.83          | 9.0           | 4.0                        | A+ |
|             | 9 12 24 - -                   | 2.40              | 3.20   | 6.40   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.84          | 9.0           | 4.0                        | A+ |
|             | 9 14 14 - -                   | 2.92              | 4.54   | 4.54   | -      | -      | 12.0 (3.5-14.0)       | 3.14 (0.7-3.82) | 3.82          | 9.0           | 4.0                        | A+ |
|             | 9 14 18 - -                   | 2.63              | 4.10   | 5.27   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.83          | 9.0           | 4.0                        | A+ |
|             | 9 14 24 - -                   | 2.30              | 3.57   | 6.13   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.84          | 9.0           | 4.0                        | A+ |
|             | 9 18 18 - -                   | 2.40              | 4.80   | 4.80   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.84          | 9.0           | 4.0                        | A+ |
|             | 9 18 24 - -                   | 2.12              | 4.24   | 5.64   | -      | -      | 12.0 (3.5-14.0)       | 3.12 (0.7-3.82) | 3.85          | 9.0           | 4.0                        | A+ |
|             | 12 12 12 - -                  | 4.00              | 4.00   | 4.00   | -      | -      | 12.0 (3.5-14.0)       | 3.14 (0.7-3.82) | 3.82          | 9.0           | 4.0                        | A+ |
|             | 12 12 14 - -                  | 3.79              | 3.79   | 4.42   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.83          | 9.0           | 4.0                        | A+ |
|             | 12 12 18 - -                  | 3.43              | 3.43   | 5.14   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.83          | 9.0           | 4.0                        | A+ |
|             | 12 12 24 - -                  | 3.00              | 3.00   | 6.00   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.84          | 9.0           | 4.0                        | A+ |
|             | 12 14 14 - -                  | 3.60              | 4.20   | 4.20   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.83          | 9.0           | 4.0                        | A+ |
|             | 12 14 18 - -                  | 3.27              | 3.82   | 4.91   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.83          | 9.0           | 4.0                        | A+ |
|             | 12 14 24 - -                  | 2.88              | 3.36   | 5.76   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.84          | 9.0           | 4.0                        | A+ |
|             | 12 18 18 - -                  | 3.00              | 4.50   | 4.50   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.84          | 9.0           | 4.0                        | A+ |
|             | 12 18 24 - -                  | 2.67              | 4.00   | 5.33   | -      | -      | 12.0 (3.5-14.0)       | 3.12 (0.7-3.82) | 3.85          | 9.0           | 4.0                        | A+ |
|             | 14 14 14 - -                  | 4.00              | 4.00   | 4.00   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.83          | 9.0           | 4.0                        | A+ |
|             | 14 14 18 - -                  | 3.65              | 3.65   | 4.70   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.84          | 9.0           | 4.0                        | A+ |
|             | 14 14 24 - -                  | 3.23              | 3.23   | 5.54   | -      | -      | 12.0 (3.5-14.0)       | 3.12 (0.7-3.82) | 3.85          | 9.0           | 4.0                        | A+ |
|             | 14 18 18 - -                  | 3.36              | 4.32   | 4.32   | -      | -      | 12.0 (3.5-14.0)       | 3.13 (0.7-3.82) | 3.84          | 9.0           | 4.0                        | A+ |
|             | 18 18 18 - -                  | 4.00              | 4.00   | 4.00   | -      | -      | 12.0 (3.5-14.0)       | 3.12 (0.7-3.82) | 3.85          | 9.0           | 4.0                        | A+ |
| 4 Room      | 7 7 7 7 -                     | 2.40              | 2.40   | 2.40   | 2.40   | -      | 9.6 (3.5-11.2)        | 2.31 (0.7-2.98) | 4.16          | 8.8           | 4.2                        | A+ |
|             | 7 7 7 9 -                     | 2.40              | 2.40   | 2.40   | 3.00   | -      | 10.2 (3.5-12.0)       | 2.47 (0.7-3.22) | 4.13          | 8.9           | 4.2                        | A+ |
|             | 7 7 7 12 -                    | 2.40              | 2.40   | 2.40   | 4.20   | -      | 11.4 (3.5-13.2)       | 2.79 (0.7-3.58) | 4.09          | 9.0           | 4.2                        | A+ |
|             | 7 7 7 14 -                    | 2.40              | 2.40   | 2.40   | 4.80   | -      | 12.0 (3.5-14.0)       | 2.95 (0.7-3.82) | 4.07          | 9.0           | 4.2                        | A+ |
|             | 7 7 7 18 -                    | 2.15              | 2.15   | 2.15   | 5.55   | -      | 12.0 (3.5-14.0)       | 2.94 (0.7-3.82) | 4.08          | 9.0           | 4.2                        | A+ |
|             | 7 7 7 24 -                    | 1.87              | 1.87   | 1.87   | 6.39   | -      | 12.0 (3.5-14.0)       | 2.93 (0.7-3.82) | 4.10          | 9.0           | 4.2                        | A+ |
|             | 7 7 9 9 -                     | 2.40              | 2.40   | 3.00   | 3.00   | -      | 10.8 (3.5-12.8)       | 2.64 (0.7-3.46) | 4.09          | 9.0           | 4.2                        | A+ |
|             | 7 7 9 12 -                    | 2.40              | 2.40   | 3.00   | 4.20   | -      | 12.0 (3.5-14.0)       | 2.95 (0.7-3.82) | 4.07          | 9.0           | 4.2                        | A+ |
|             | 7 7 9 14 -                    | 2.27              | 2.27   | 2.92   | 4.54   | -      | 12.0 (3.5-14.0)       | 2.95 (0.7-3.82) | 4.07          | 9.0           | 4.2                        | A+ |
|             | 7 7 9 18 -                    | 2.05              | 2.05   | 2.63   | 5.27   | -      | 12.0 (3.5-14.0)       | 2.94 (0.7-3.82) | 4.08          | 9.0           | 4.2                        | A+ |
|             | 7 7 9 24 -                    | 1.79              | 1.79   | 2.30   | 6.12   | -      | 12.0 (3.5-14.0)       | 2.93 (0.7-3.82) | 4.10          | 9.0           | 4.2                        | A+ |
|             | 7 7 12 12 -                   | 2.21              | 2.21   | 3.79   | 3.79   | -      | 12.0 (3.5-14.0)       | 2.94 (0.7-3.82) | 4.08          | 9.0           | 4.2                        | A+ |
|             | 7 7 12 14 -                   | 2.10              | 2.10   | 3.60   | 4.20   | -      | 12.0 (3.5-14.0)       | 2.94 (0.7-3.82) | 4.08          | 9.0           | 4.2                        | A+ |
|             | 7 7 12 18 -                   | 1.91              | 1.91   | 3.27   | 4.91   | -      | 12.0 (3.5-14.0)       | 2.93 (0.7-3.82) | 4.09          | 9.0           | 4.2                        | A+ |
|             | 7 7 12 24 -                   | 1.68              | 1.68   | 2.88   | 5.76   | -      | 12.0 (3.5-14.0)       | 2.92 (0.7-3.82) | 4.11          | 9.0           | 4.2                        | A+ |
|             | 7 7 14 14 -                   | 2.00              | 2.00   | 4.00   | 4.00   | -      | 12.0 (3.5-14.0)       | 2.93 (0.7-3.82) | 4.09          | 9.0           | 4.2                        | A+ |
|             | 7 7 14 18 -                   | 1.83              | 1.83   | 3.65   | 4.69   | -      | 12.0 (3.5-14.0)       | 2.93 (0.7-3.82) | 4.10          | 9.0           | 4.2                        | A+ |
|             | 7 7 14 24 -                   | 1.62              | 1.62   | 3.23   | 5.53   | -      | 12.0 (3.5-14.0)       | 2.92 (0.7-3.82) | 4.11          | 9.0           | 4.2                        | A+ |
|             | 7 7 18 18 -                   | 1.68              | 1.68   | 4.32   | 4.32   | -      | 12.0 (3.5-14.0)       | 2.92 (0.7-3.82) | 4.11          | 9.0           | 4.2                        | A+ |
|             | 7 9 9 9 -                     | 2.40              | 3.00   | 3.00   | 3.00   | -      | 11.4 (3.5-13.6)       | 2.80 (0.7-3.70) | 4.07          | 9.0           | 4.2                        | A+ |
|             | 7 9 9 12 -                    | 2.27              | 2.27   | 2.92   | 3.89   | -      | 12.0 (3.5-14.0)       | 2.95 (0.7-3.82) | 4.07          | 9.0           | 4.2                        | A+ |
|             | 7 9 9 14 -                    | 2.15              | 2.77   | 2.77   | 4.31   | -      | 12.0 (3.5-14.0)       | 2.94 (0.7-3.82) | 4.08          | 9.0           | 4.2                        | A+ |
|             | 7 9 9 18 -                    | 1.95              | 2.51   | 2.51   | 5.03   | -      | 12.0 (3.5-14.0)       | 2.93 (0.7-3.82) | 4.09          | 9.0           | 4.2                        | A+ |
|             | 7 9 9 24 -                    | 1.71              | 2.20   | 2.20   | 5.89   | -      | 12.0 (3.5-14.0)       | 2.92 (0.7-3.82) | 4.11          | 9.0           | 4.2                        | A+ |
|             | 7 9 18 18 -                   | 1.62              | 2.08   | 4.15   | 4.15   | -      | 12.0 (3.5-14.0)       | 2.94 (0.7-3.82) | 4.08          | 9.0           | 4.2                        | A+ |
|             | 7 9 12 14 -</                 |                   |        |        |        |        |                       |                 |               |               |                            |    |

**5 Rooms Multi heating**

| AOYG36LBLA5 | Combination of Indoor Unit | HEATING OPERATION |              |              |              |                 |                                |                 |      |               |      | Seasonal Data           |  |  |
|-------------|----------------------------|-------------------|--------------|--------------|--------------|-----------------|--------------------------------|-----------------|------|---------------|------|-------------------------|--|--|
|             |                            | Heating Capacity  |              |              |              |                 | Input Power (min-max)          |                 | COP  | Pdesign<br>kW | SCOP | Energy efficiency class |  |  |
|             |                            | Room 1<br>kW      | Room 2<br>kW | Room 3<br>kW | Room 4<br>kW | Room 5<br>kW    | Total Capacity (min-max)<br>kW |                 |      |               |      |                         |  |  |
| 5 Room      | 7 7 7 7 7                  | 2.40              | 2.40         | 2.40         | 2.40         | 2.40            | 12.0 (3.5-14.0)                | 2.79 (0.7-3.82) | 4.30 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 7 9                  | 2.27              | 2.27         | 2.27         | 2.27         | 2.27            | 12.0 (3.5-14.0)                | 2.79 (0.7-3.82) | 4.30 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 7 12                 | 2.10              | 2.10         | 2.10         | 2.10         | 3.60            | 12.0 (3.5-14.0)                | 2.78 (0.7-3.82) | 4.31 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 7 14                 | 2.00              | 2.00         | 2.00         | 2.00         | 4.00            | 12.0 (3.5-14.0)                | 2.78 (0.7-3.82) | 4.32 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 7 18                 | 1.83              | 1.83         | 1.83         | 1.83         | 4.68            | 12.0 (3.5-14.0)                | 2.77 (0.7-3.82) | 4.33 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 7 24                 | 1.62              | 1.62         | 1.62         | 1.62         | 5.52            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 9 9                  | 2.15              | 2.15         | 2.15         | 2.77         | 2.77            | 12.0 (3.5-14.0)                | 2.78 (0.7-3.82) | 4.31 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 9 12                 | 2.00              | 2.00         | 2.00         | 2.57         | 3.43            | 12.0 (3.5-14.0)                | 2.78 (0.7-3.82) | 4.32 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 9 14                 | 1.91              | 1.91         | 1.91         | 2.45         | 3.82            | 12.0 (3.5-14.0)                | 2.78 (0.7-3.82) | 4.32 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 9 18                 | 1.75              | 1.75         | 1.75         | 2.25         | 4.50            | 12.0 (3.5-14.0)                | 2.77 (0.7-3.82) | 4.33 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 9 24                 | 1.56              | 1.56         | 1.56         | 2.00         | 5.32            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.35 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 12 12                | 1.87              | 1.87         | 1.87         | 3.20         | 3.20            | 12.0 (3.5-14.0)                | 2.77 (0.7-3.82) | 4.33 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 12 14                | 1.79              | 1.79         | 1.79         | 3.06         | 3.57            | 12.0 (3.5-14.0)                | 2.77 (0.7-3.82) | 4.33 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 12 18                | 1.65              | 1.65         | 1.65         | 2.82         | 4.23            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 14 14                | 1.71              | 1.71         | 1.71         | 3.43         | 3.43            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 7 14 18                | 1.58              | 1.58         | 1.58         | 3.17         | 4.09            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.35 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 9 9 9                  | 2.05              | 2.05         | 2.63         | 2.63         | 12.0 (3.5-14.0) | 2.78 (0.7-3.82)                | 4.31            | 9.0  | 4,4           | A+   |                         |  |  |
|             | 7 7 9 9 12                 | 1.91              | 1.91         | 2.45         | 2.45         | 3.28            | 12.0 (3.5-14.0)                | 2.78 (0.7-3.82) | 4.32 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 9 9 14                 | 1.83              | 1.83         | 2.35         | 2.35         | 3.64            | 12.0 (3.5-14.0)                | 2.77 (0.7-3.82) | 4.33 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 9 9 18                 | 1.68              | 1.68         | 2.16         | 2.16         | 4.32            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 9 12 12                | 1.79              | 1.79         | 2.30         | 3.06         | 3.06            | 12.0 (3.5-14.0)                | 2.77 (0.7-3.82) | 4.33 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 9 12 14                | 1.71              | 1.71         | 2.20         | 2.94         | 3.44            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 9 12 18                | 1.58              | 1.58         | 2.04         | 2.72         | 4.08            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.35 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 9 14 14                | 1.65              | 1.65         | 2.12         | 3.29         | 3.29            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 12 12 12               | 1.68              | 1.68         | 2.88         | 2.88         | 2.88            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 12 12 14               | 1.62              | 1.62         | 2.77         | 2.77         | 3.22            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 7 12 14 14               | 1.56              | 1.56         | 2.66         | 3.11         | 3.11            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.35 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 9 9 9 9                  | 1.96              | 2.51         | 2.51         | 2.51         | 2.51            | 12.0 (3.5-14.0)                | 2.78 (0.7-3.82) | 4.32 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 9 9 9 12                 | 1.83              | 2.35         | 2.35         | 2.35         | 3.12            | 12.0 (3.5-14.0)                | 2.77 (0.7-3.82) | 4.33 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 9 9 9 14                 | 1.75              | 2.25         | 2.25         | 2.25         | 3.50            | 12.0 (3.5-14.0)                | 2.77 (0.7-3.82) | 4.33 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 9 9 9 18                 | 1.62              | 2.08         | 2.08         | 2.08         | 4.14            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 9 9 12 12                | 1.72              | 2.20         | 2.20         | 2.94         | 2.94            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 9 9 12 14                | 1.65              | 2.12         | 2.12         | 2.82         | 3.29            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 9 9 14 14                | 1.58              | 2.04         | 2.04         | 3.17         | 3.17            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.35 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 9 12 12 12               | 1.61              | 2.08         | 2.77         | 2.77         | 2.77            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 7 9 12 12 14               | 1.56              | 2.00         | 2.67         | 2.67         | 3.10            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.35 | 9.0           | 4,4  | A+                      |  |  |
|             | 9 9 9 9 9                  | 2.40              | 2.40         | 2.40         | 2.40         | 2.40            | 12.0 (3.5-14.0)                | 2.77 (0.7-3.82) | 4.33 | 9.0           | 4,4  | A+                      |  |  |
|             | 9 9 9 9 12                 | 2.25              | 2.25         | 2.25         | 3.00         | 3.00            | 12.0 (3.5-14.0)                | 2.77 (0.7-3.82) | 4.33 | 9.0           | 4,4  | A+                      |  |  |
|             | 9 9 9 9 14                 | 2.16              | 2.16         | 2.16         | 3.36         | 3.36            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 9 9 9 9 18                 | 2.00              | 2.00         | 2.00         | 4.00         | 4.00            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.35 | 9.0           | 4,4  | A+                      |  |  |
|             | 9 9 9 12 12                | 2.12              | 2.12         | 2.12         | 2.82         | 2.82            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.34 | 9.0           | 4,4  | A+                      |  |  |
|             | 9 9 9 12 14                | 2.04              | 2.04         | 2.04         | 2.72         | 3.16            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.35 | 9.0           | 4,4  | A+                      |  |  |
|             | 9 9 12 12 12               | 2.00              | 2.00         | 2.67         | 2.67         | 2.67            | 12.0 (3.5-14.0)                | 2.76 (0.7-3.82) | 4.35 | 9.0           | 4,4  | A+                      |  |  |

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h / 24:24000Btu/h models

•The above is the value for connecting with Wall Mounted type.

•2 or more indoor units should be connected.

•Heating capacity is based on 20°CDB (indoor temperature), 7°CDB/6°CWB (outdoor temperature).


•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•The Total ability of connected indoor unit is up to 54000Btu from 27000Btu.



## 6 Rooms Multi cooling

| AOYG45LBLA6 | Combination of Indoor Unit |    | COOLING OPERATION |        |        |        |        |        |                          | Input Power (min-max) | EER |                 |      |
|-------------|----------------------------|----|-------------------|--------|--------|--------|--------|--------|--------------------------|-----------------------|-----|-----------------|------|
|             |                            |    | Room 1            | Room 2 | Room 3 | Room 4 | Room 5 | Room 6 | Total Capacity (min-max) |                       |     |                 |      |
|             |                            |    | kW                | kW     | kW     | kW     | kW     | kW     | kW                       |                       |     |                 |      |
| 4 Room      | 12                         | 12 | 12                | 12     | -      | -      | 3.13   | 3.13   | 3.13                     | -                     | -   | 3.75 (0.8-4.84) | 3.33 |
|             | 12                         | 12 | 12                | 14     | -      | -      | 3.00   | 3.00   | 3.00                     | 3.50                  | -   | 3.74 (0.8-4.84) | 3.34 |
|             | 12                         | 12 | 12                | 18     | -      | -      | 2.78   | 2.78   | 2.78                     | 4.16                  | -   | 3.71 (0.8-4.84) | 3.37 |
|             | 12                         | 12 | 12                | 24     | -      | -      | 2.50   | 2.50   | 2.50                     | 5.00                  | -   | 3.68 (0.8-4.84) | 3.40 |
|             | 12                         | 12 | 14                | 14     | -      | -      | 2.88   | 2.88   | 3.37                     | 3.37                  | -   | 3.73 (0.8-4.84) | 3.35 |
|             | 12                         | 12 | 14                | 18     | -      | -      | 2.68   | 2.68   | 3.13                     | 4.01                  | -   | 3.70 (0.8-4.84) | 3.38 |
|             | 12                         | 12 | 14                | 24     | -      | -      | 2.42   | 2.42   | 2.82                     | 4.84                  | -   | 3.67 (0.8-4.84) | 3.41 |
|             | 12                         | 12 | 18                | 18     | -      | -      | 2.50   | 2.50   | 3.75                     | 3.75                  | -   | 3.68 (0.8-4.84) | 3.40 |
|             | 12                         | 14 | 14                | 14     | -      | -      | 2.78   | 3.24   | 3.24                     | 3.24                  | -   | 3.71 (0.8-4.84) | 3.37 |
|             | 12                         | 14 | 14                | 18     | -      | -      | 2.59   | 3.02   | 3.02                     | 3.87                  | -   | 3.69 (0.8-4.84) | 3.39 |
|             | 12                         | 14 | 18                | 18     | -      | -      | 2.42   | 2.82   | 3.63                     | 3.63                  | -   | 3.67 (0.8-4.84) | 3.41 |
|             | 7                          | 7  | 7                 | 7      | 7      | -      | 2.00   | 2.00   | 2.00                     | 2.00                  | -   | 2.44 (0.8-3.13) | 4.10 |
|             | 7                          | 7  | 7                 | 7      | 9      | -      | 2.00   | 2.00   | 2.00                     | 2.50                  | -   | 2.72 (0.8-3.51) | 3.86 |
|             | 7                          | 7  | 7                 | 7      | 12     | -      | 2.00   | 2.00   | 2.00                     | 3.50                  | -   | 3.18 (0.8-4.08) | 3.62 |
|             | 7                          | 7  | 7                 | 7      | 14     | -      | 2.00   | 2.00   | 2.00                     | 4.00                  | -   | 3.41 (0.8-4.46) | 3.52 |
|             | 7                          | 7  | 7                 | 7      | 18     | -      | 1.90   | 1.90   | 1.90                     | 4.90                  | -   | 3.65 (0.8-4.84) | 3.42 |
|             | 7                          | 7  | 7                 | 7      | 24     | -      | 1.68   | 1.68   | 1.68                     | 5.78                  | -   | 3.61 (0.8-4.84) | 3.46 |
|             | 7                          | 7  | 7                 | 9      | 9      | -      | 2.00   | 2.00   | 2.50                     | 2.50                  | -   | 2.98 (0.8-3.89) | 3.69 |
|             | 7                          | 7  | 7                 | 9      | 12     | -      | 2.00   | 2.00   | 2.50                     | 3.50                  | -   | 3.41 (0.8-4.46) | 3.52 |
|             | 7                          | 7  | 7                 | 9      | 14     | -      | 2.00   | 2.00   | 2.50                     | 4.00                  | -   | 3.67 (0.8-4.84) | 3.41 |
|             | 7                          | 7  | 7                 | 9      | 18     | -      | 1.82   | 1.82   | 2.34                     | 4.70                  | -   | 3.64 (0.8-4.84) | 3.43 |
|             | 7                          | 7  | 7                 | 9      | 24     | -      | 1.62   | 1.62   | 2.08                     | 5.56                  | -   | 3.60 (0.8-4.84) | 3.47 |
|             | 7                          | 7  | 7                 | 12     | 12     | -      | 1.94   | 1.94   | 3.34                     | 3.34                  | -   | 3.65 (0.8-4.84) | 3.42 |
|             | 7                          | 7  | 7                 | 12     | 14     | -      | 1.86   | 1.86   | 3.19                     | 3.73                  | -   | 3.64 (0.8-4.84) | 3.43 |
|             | 7                          | 7  | 7                 | 12     | 18     | -      | 1.72   | 1.72   | 2.94                     | 4.40                  | -   | 3.62 (0.8-4.84) | 3.45 |
|             | 7                          | 7  | 7                 | 12     | 24     | -      | 1.54   | 1.54   | 2.63                     | 5.25                  | -   | 3.58 (0.8-4.84) | 3.49 |
|             | 7                          | 7  | 7                 | 14     | 14     | -      | 1.79   | 1.79   | 3.57                     | 3.57                  | -   | 3.63 (0.8-4.84) | 3.44 |
|             | 7                          | 7  | 7                 | 14     | 18     | -      | 1.65   | 1.65   | 3.30                     | 4.25                  | -   | 3.60 (0.8-4.84) | 3.47 |
|             | 7                          | 7  | 7                 | 14     | 24     | -      | 1.48   | 1.48   | 2.97                     | 5.09                  | -   | 3.57 (0.8-4.84) | 3.50 |
|             | 7                          | 7  | 7                 | 18     | 18     | -      | 1.54   | 1.54   | 3.94                     | 3.94                  | -   | 3.58 (0.8-4.84) | 3.49 |
|             | 7                          | 7  | 9                 | 9      | 9      | -      | 2.00   | 2.00   | 2.50                     | 2.50                  | -   | 3.24 (0.8-4.27) | 3.55 |
|             | 7                          | 7  | 9                 | 9      | 12     | -      | 2.00   | 2.00   | 2.50                     | 3.50                  | -   | 3.67 (0.8-4.84) | 3.41 |
|             | 7                          | 7  | 9                 | 9      | 14     | -      | 1.90   | 2.65   | 2.65                     | 3.80                  | -   | 3.65 (0.8-4.84) | 3.42 |
|             | 7                          | 7  | 9                 | 9      | 18     | -      | 1.75   | 2.25   | 2.25                     | 4.50                  | -   | 3.62 (0.8-4.84) | 3.45 |
|             | 7                          | 7  | 9                 | 9      | 24     | -      | 1.56   | 2.01   | 2.01                     | 5.36                  | -   | 3.59 (0.8-4.84) | 3.48 |
|             | 7                          | 7  | 9                 | 12     | 12     | -      | 1.86   | 2.40   | 3.19                     | 3.19                  | -   | 3.64 (0.8-4.84) | 3.43 |
|             | 7                          | 7  | 9                 | 12     | 14     | -      | 1.79   | 2.30   | 3.06                     | 3.56                  | -   | 3.63 (0.8-4.84) | 3.44 |
|             | 7                          | 7  | 9                 | 12     | 18     | -      | 1.65   | 2.12   | 2.83                     | 4.25                  | -   | 3.60 (0.8-4.84) | 3.47 |
|             | 7                          | 7  | 9                 | 12     | 24     | -      | 1.48   | 1.48   | 1.91                     | 5.09                  | -   | 3.57 (0.8-4.84) | 3.50 |
|             | 7                          | 7  | 9                 | 14     | 14     | -      | 1.72   | 1.72   | 2.20                     | 3.43                  | -   | 3.62 (0.8-4.84) | 3.45 |
|             | 7                          | 7  | 9                 | 14     | 18     | -      | 1.59   | 1.59   | 2.05                     | 3.18                  | -   | 3.59 (0.8-4.84) | 3.48 |
|             | 7                          | 7  | 9                 | 14     | 24     | -      | 1.43   | 1.43   | 1.84                     | 4.93                  | -   | 3.56 (0.8-4.84) | 3.51 |
|             | 7                          | 7  | 9                 | 18     | 18     | -      | 1.48   | 1.48   | 1.92                     | 3.81                  | -   | 3.57 (0.8-4.84) | 3.50 |
|             | 7                          | 7  | 12                | 12     | 12     | -      | 1.75   | 3.00   | 3.00                     | 3.00                  | -   | 3.62 (0.8-4.84) | 3.45 |
|             | 7                          | 7  | 12                | 12     | 14     | -      | 1.68   | 1.68   | 2.88                     | 2.88                  | -   | 3.61 (0.8-4.84) | 3.46 |
|             | 7                          | 7  | 12                | 12     | 18     | -      | 1.56   | 1.56   | 2.68                     | 2.68                  | -   | 3.59 (0.8-4.84) | 3.48 |
|             | 7                          | 7  | 12                | 12     | 24     | -      | 1.41   | 1.41   | 2.42                     | 4.84                  | -   | 3.55 (0.8-4.84) | 3.52 |
|             | 7                          | 7  | 12                | 14     | 18     | -      | 1.62   | 1.62   | 2.78                     | 3.24                  | -   | 3.60 (0.8-4.84) | 3.47 |
|             | 7                          | 7  | 12                | 18     | 18     | -      | 1.51   | 1.51   | 2.59                     | 3.02                  | -   | 3.57 (0.8-4.84) | 3.50 |
|             | 7                          | 7  | 12                | 18     | 24     | -      | 1.41   | 1.41   | 2.42                     | 3.63                  | -   | 3.55 (0.8-4.84) | 3.52 |
|             | 7                          | 7  | 14                | 14     | 14     | -      | 1.56   | 1.56   | 3.13                     | 3.13                  | -   | 3.59 (0.8-4.84) | 3.48 |
|             | 7                          | 7  | 14                | 14     | 18     | -      | 1.46   | 1.46   | 2.92                     | 3.74                  | -   | 3.56 (0.8-4.84) | 3.51 |
|             | 7                          | 9  | 9                 | 9      | 9      | -      | 2.00   | 2.50   | 2.50                     | 2.50                  | -   | 3.47 (0.8-4.65) | 3.46 |
|             | 7                          | 9  | 9                 | 9      | 12     | -      | 1.90   | 2.45   | 2.45                     | 3.25                  | -   | 3.65 (0.8-4.84) | 3.42 |
|             | 7                          | 9  | 9                 | 9      | 14     | -      | 1.82   | 2.34   | 2.34                     | 3.66                  | -   | 3.64 (0.8-4.84) | 3.43 |
|             | 7                          | 9  | 9                 | 9      | 18     | -      | 1.68   | 2.16   | 2.16                     | 4.34                  | -   | 3.61 (0.8-4.84) | 3.46 |
|             | 7                          | 9  | 9                 | 9      | 24     | -      | 1.51   | 1.94   | 1.94                     | 5.17                  | -   | 3.57 (0.8-4.84) | 3.50 |
|             | 7                          | 9  | 9                 | 12     | 12     | -      | 1.78   | 2.30   | 2.30                     | 3.06                  | -   | 3.63 (0.8-4.84) | 3.44 |
|             | 7                          | 9  | 9                 | 12     | 14     | -      | 1.72   | 2.21   | 2.21                     | 2.94                  | -   | 3.62 (0.8-4.84) | 3.45 |
|             | 7                          | 9  | 9                 | 12     | 18     | -      | 1.59   | 2.05   | 2.05                     | 4.08                  | -   | 3.59 (0.8-4.84) | 3.48 |
|             | 7                          | 9  | 9                 | 12     | 24     | -      | 1.43   | 1.84   | 1.84                     | 4.93                  | -   | 3.56 (0.8-4.84) | 3.51 |
|             | 7                          | 9  | 9                 | 14     | 14     | -      | 1.66   | 2.12   | 3.20                     | 3.30                  | -   | 3.60 (0.8-4.84) | 3.47 |
|             | 7                          | 9  | 9                 | 14     | 18     | -      | 1.54   | 1.97   | 1.97                     | 3.07                  | -   | 3.58 (0.8-4.84) | 3.49 |
|             | 7                          | 9  | 9                 | 14     | 24     | -      | 1.44   | 1.84   | 2.88                     | 3.69                  | -   | 3.56 (0.8-4.84) | 3.51 |
|             | 7                          | 9  | 9                 | 12     | 12     | -      | 1.69   | 2.17   | 2.88                     | 2.88                  | -   | 3.61 (0.8-4.84) | 3.46 |
|             | 7                          | 9  | 9                 | 12     | 14     | -      | 1.62   | 2.08   | 2.78                     | 3.24                  | -   | 3.60 (0.8-4.84) | 3.47 |
|             | 7                          | 9  | 9                 | 12     | 18     | -      | 1.51   | 1.94   | 2.59                     | 3.87                  | -   | 3.57 (0.8-4.84) | 3.50 |
|             | 7                          | 9  | 9                 | 12     | 24     | -      | 1.55   | 2.05   | 2.73                     | 4.08                  | -   | 3.59 (0.8-4.84) | 3.48 |
|             | 7                          | 9  | 9                 | 14     | 14     | -      | 1.55   | 2.01   | 2.68                     | 3.13                  | -   | 3.59 (0.8-4.84) | 3.48 |
|             | 7                          | 9  | 9                 | 14     | 18     | -      | 1.46   | 1.88   | 2.50                     | 2.92                  | -   | 3.56 (0.8-4.84) | 3.51 |
|             | 7                          | 9  | 9                 | 14     | 24     | -      | 1.50   | 1.94   | 3.02                     | 3.02                  | -   | 3.57 (0.8-4.84) | 3.50 |
|             | 7                          | 9  | 9                 | 18     | 18     | -      | 1.41   | 1.81   | 2.82                     | 3.64                  | -   | 3.55 (0.8-4.84) | 3.52 |
|             | 7                          | 12 | 12                | 12     | 12     | -      | 1.58   | 2.73   | 2.73                     | 2.73                  | -   | 3.59 (0.8-4.84) | 3.48 |
|             | 7                          | 12 | 12                | 12     | 14     | -      | 1.54   | 2.63   | 2.63                     | 3.07                  | -   | 3.58 (0.8-4.84) | 3.49 |
|             | 7                          | 12 | 12                | 12     | 18     | -      | 1.43   | 2.46   | 2.46                     | 3.69                  | -   | 3.56 (0.8-4.84) | 3.51 |
|             | 7                          | 12 | 12                | 12     | 24     | -      | 1.48   | 2.54   | 2.97                     | 2.97                  | -   | 3.57 (0.8-4.84) | 3.50 |
|             | 7                          | 12 | 14                | 14     | 14     | -      | 1.43   | 2.46   | 2.87                     | 2.87                  | -   | 3.56 (0.8-4.84) | 3.51 |
|             | 9                          | 9  | 9                 | 9      | 9      | -      | 2.50   | 2.50   | 2.50                     | 2.50                  | -   | 3.65 (0.8-4.84) | 3.42 |
|             | 9                          | 9  | 9                 | 9      | 12     | -</    |        |        |                          |                       |     |                 |      |



## PRODUCT LINEUP: MULTI SPLIT

# MULTI SPLIT Combination Table for 6 Rooms-Cooling/Heating

### 6 Rooms Multi cooling

| AOYG45LBLA6 | Combination of Indoor Unit | COOLING OPERATION |              |              |              |              |              |                                | Input Power (min-max)<br>kW | EER  |  |  |
|-------------|----------------------------|-------------------|--------------|--------------|--------------|--------------|--------------|--------------------------------|-----------------------------|------|--|--|
|             |                            | Cooling Capacity  |              |              |              |              |              | Total Capacity (min-max)<br>kW |                             |      |  |  |
|             |                            | Room 1<br>kW      | Room 2<br>kW | Room 3<br>kW | Room 4<br>kW | Room 5<br>kW | Room 6<br>kW |                                |                             |      |  |  |
| 6 Room      | 7 7 7 7 7 7 7              | 2.00              | 2.00         | 2.00         | 2.00         | 2.00         | 2.00         | 12.0 (3.5-13.4)                | 3.32 (0.8-4.46)             | 3.61 |  |  |
|             | 7 7 7 7 7 7 9              | 2.00              | 2.00         | 2.00         | 2.00         | 2.50         | 2.50         | 12.5 (3.5-14.0)                | 3.57 (0.8-4.84)             | 3.50 |  |  |
|             | 7 7 7 7 7 7 12             | 1.86              | 1.86         | 1.86         | 1.86         | 3.20         | 3.20         | 12.5 (3.5-14.0)                | 3.55 (0.8-4.84)             | 3.52 |  |  |
|             | 7 7 7 7 7 7 14             | 1.79              | 1.79         | 1.79         | 1.79         | 3.55         | 3.55         | 12.5 (3.5-14.0)                | 3.54 (0.8-4.84)             | 3.53 |  |  |
|             | 7 7 7 7 7 7 18             | 1.65              | 1.65         | 1.65         | 1.65         | 4.25         | 4.25         | 12.5 (3.5-14.0)                | 3.51 (0.8-4.84)             | 3.56 |  |  |
|             | 7 7 7 7 7 7 24             | 1.48              | 1.48         | 1.48         | 1.48         | 5.10         | 5.10         | 12.5 (3.5-14.0)                | 3.48 (0.8-4.84)             | 3.59 |  |  |
|             | 7 7 7 7 7 9 9              | 1.90              | 1.90         | 1.90         | 1.90         | 2.45         | 2.45         | 12.5 (3.5-14.0)                | 3.56 (0.8-4.84)             | 3.51 |  |  |
|             | 7 7 7 7 7 9 12             | 1.79              | 1.79         | 1.79         | 1.79         | 3.05         | 3.05         | 12.5 (3.5-14.0)                | 3.54 (0.8-4.84)             | 3.53 |  |  |
|             | 7 7 7 7 7 9 14             | 1.72              | 1.72         | 1.72         | 1.72         | 3.42         | 3.42         | 12.5 (3.5-14.0)                | 3.53 (0.8-4.84)             | 3.54 |  |  |
|             | 7 7 7 7 7 9 18             | 1.59              | 1.59         | 1.59         | 1.59         | 4.09         | 4.09         | 12.5 (3.5-14.0)                | 3.50 (0.8-4.84)             | 3.57 |  |  |
|             | 7 7 7 7 7 9 24             | 1.43              | 1.43         | 1.43         | 1.43         | 4.93         | 4.93         | 12.5 (3.5-14.0)                | 3.47 (0.8-4.84)             | 3.60 |  |  |
|             | 7 7 7 7 7 12 12            | 1.68              | 1.68         | 1.68         | 1.68         | 2.89         | 2.89         | 12.5 (3.5-14.0)                | 3.52 (0.8-4.84)             | 3.55 |  |  |
|             | 7 7 7 7 7 12 14            | 1.62              | 1.62         | 1.62         | 1.62         | 3.24         | 3.24         | 12.5 (3.5-14.0)                | 3.51 (0.8-4.84)             | 3.56 |  |  |
|             | 7 7 7 7 7 12 18            | 1.51              | 1.51         | 1.51         | 1.51         | 2.59         | 2.59         | 12.5 (3.5-14.0)                | 3.48 (0.8-4.84)             | 3.59 |  |  |
|             | 7 7 7 7 7 14 14            | 1.56              | 1.56         | 1.56         | 1.56         | 3.13         | 3.13         | 12.5 (3.5-14.0)                | 3.50 (0.8-4.84)             | 3.57 |  |  |
|             | 7 7 7 7 7 14 18            | 1.46              | 1.46         | 1.46         | 1.46         | 2.92         | 2.92         | 12.5 (3.5-14.0)                | 3.47 (0.8-4.84)             | 3.60 |  |  |
|             | 7 7 7 7 9 9 9              | 1.82              | 1.82         | 1.82         | 1.82         | 2.34         | 2.34         | 12.5 (3.5-14.0)                | 3.55 (0.8-4.84)             | 3.52 |  |  |
|             | 7 7 7 7 9 9 12             | 1.72              | 1.72         | 1.72         | 1.72         | 2.21         | 2.21         | 12.5 (3.5-14.0)                | 3.53 (0.8-4.84)             | 3.54 |  |  |
|             | 7 7 7 7 9 9 14             | 1.65              | 1.65         | 1.65         | 1.65         | 2.12         | 2.12         | 12.5 (3.5-14.0)                | 3.51 (0.8-4.84)             | 3.56 |  |  |
|             | 7 7 7 7 9 9 18             | 1.54              | 1.54         | 1.54         | 1.54         | 1.97         | 1.97         | 12.5 (3.5-14.0)                | 2.49 (0.8-4.84)             | 3.58 |  |  |
|             | 7 7 7 9 12 12              | 1.62              | 1.62         | 2.08         | 2.08         | 2.78         | 2.78         | 12.5 (3.5-14.0)                | 3.51 (0.8-4.84)             | 3.56 |  |  |
|             | 7 7 7 9 12 14              | 1.56              | 1.56         | 2.01         | 2.01         | 2.68         | 2.68         | 12.5 (3.5-14.0)                | 3.50 (0.8-4.84)             | 3.57 |  |  |
|             | 7 7 7 9 12 18              | 1.46              | 1.46         | 1.88         | 1.88         | 2.50         | 2.50         | 12.5 (3.5-14.0)                | 3.47 (0.8-4.84)             | 3.60 |  |  |
|             | 7 7 7 9 14 14              | 1.51              | 1.51         | 1.93         | 1.93         | 3.02         | 3.02         | 12.5 (3.5-14.0)                | 3.48 (0.8-4.84)             | 3.59 |  |  |
|             | 7 7 7 12 12 12             | 1.54              | 1.54         | 2.63         | 2.63         | 2.63         | 2.63         | 12.5 (3.5-14.0)                | 3.49 (0.8-4.84)             | 3.58 |  |  |
|             | 7 7 7 12 12 14             | 1.48              | 1.48         | 2.54         | 2.54         | 2.98         | 2.98         | 12.5 (3.5-14.0)                | 3.48 (0.8-4.84)             | 3.59 |  |  |
|             | 7 7 7 12 14 14             | 1.43              | 1.43         | 2.47         | 2.47         | 2.87         | 2.87         | 12.5 (3.5-14.0)                | 3.47 (0.8-4.84)             | 3.60 |  |  |
|             | 7 7 9 9 9 9 9              | 1.75              | 1.75         | 2.25         | 2.25         | 2.25         | 2.25         | 12.5 (3.5-14.0)                | 3.53 (0.8-4.84)             | 3.54 |  |  |
|             | 7 7 9 9 9 9 12             | 1.65              | 1.65         | 2.12         | 2.12         | 2.12         | 2.12         | 12.5 (3.5-14.0)                | 3.51 (0.8-4.84)             | 3.56 |  |  |
|             | 7 7 9 9 9 9 14             | 1.59              | 1.59         | 2.05         | 2.05         | 2.05         | 2.05         | 12.5 (3.5-14.0)                | 3.50 (0.8-4.84)             | 3.57 |  |  |
|             | 7 7 9 9 9 9 18             | 1.48              | 1.48         | 1.91         | 1.91         | 1.91         | 1.91         | 12.5 (3.5-14.0)                | 3.48 (0.8-4.84)             | 3.59 |  |  |
|             | 7 7 9 9 9 12 12            | 1.56              | 1.56         | 2.01         | 2.01         | 2.68         | 2.68         | 12.5 (3.5-14.0)                | 3.50 (0.8-4.84)             | 3.57 |  |  |
|             | 7 7 9 9 9 12 14            | 1.51              | 1.51         | 1.94         | 1.94         | 2.59         | 2.59         | 12.5 (3.5-14.0)                | 3.48 (0.8-4.84)             | 3.59 |  |  |
|             | 7 7 9 9 9 12 18            | 1.41              | 1.41         | 1.81         | 1.81         | 2.42         | 2.42         | 12.5 (3.5-14.0)                | 3.46 (0.8-4.84)             | 3.61 |  |  |
|             | 7 7 9 9 9 14 14            | 1.46              | 1.46         | 1.88         | 1.88         | 2.91         | 2.91         | 12.5 (3.5-14.0)                | 3.47 (0.8-4.84)             | 3.60 |  |  |
|             | 7 7 9 9 12 12 12           | 1.48              | 1.48         | 2.54         | 2.54         | 2.54         | 2.54         | 12.5 (3.5-14.0)                | 3.48 (0.8-4.84)             | 3.59 |  |  |
|             | 7 7 9 9 12 12 14           | 1.43              | 1.43         | 2.46         | 2.46         | 2.87         | 2.87         | 12.5 (3.5-14.0)                | 3.47 (0.8-4.84)             | 3.60 |  |  |
|             | 7 7 9 12 12 12 12          | 1.41              | 1.41         | 2.42         | 2.42         | 2.42         | 2.42         | 12.5 (3.5-14.0)                | 3.46 (0.8-4.84)             | 3.61 |  |  |
|             | 7 9 9 9 9 9 9              | 1.70              | 2.16         | 2.16         | 2.16         | 2.16         | 2.16         | 12.5 (3.5-14.0)                | 3.52 (0.8-4.84)             | 3.55 |  |  |
|             | 7 9 9 9 9 9 12             | 1.59              | 2.05         | 2.05         | 2.05         | 2.05         | 2.05         | 12.5 (3.5-14.0)                | 3.50 (0.8-4.84)             | 3.57 |  |  |
|             | 7 9 9 9 9 9 14             | 1.54              | 1.97         | 1.97         | 1.97         | 1.97         | 1.97         | 12.5 (3.5-14.0)                | 3.49 (0.8-4.84)             | 3.58 |  |  |
|             | 7 9 9 9 9 12 12            | 1.50              | 1.94         | 1.94         | 1.94         | 2.59         | 2.59         | 12.5 (3.5-14.0)                | 3.48 (0.8-4.84)             | 3.59 |  |  |
|             | 7 9 9 9 9 12 14            | 1.46              | 1.88         | 1.88         | 1.88         | 2.50         | 2.50         | 12.5 (3.5-14.0)                | 3.47 (0.8-4.84)             | 3.60 |  |  |
|             | 7 9 9 9 12 12 12           | 1.44              | 1.84         | 1.84         | 1.84         | 2.46         | 2.46         | 12.5 (3.5-14.0)                | 3.47 (0.8-4.84)             | 3.60 |  |  |
|             | 9 9 9 9 9 9 9              | 2.08              | 2.08         | 2.08         | 2.08         | 2.08         | 2.08         | 12.5 (3.5-14.0)                | 3.51 (0.8-4.84)             | 3.56 |  |  |
|             | 9 9 9 9 9 9 12             | 1.97              | 1.97         | 1.97         | 1.97         | 1.97         | 1.97         | 12.5 (3.5-14.0)                | 3.49 (0.8-4.84)             | 3.58 |  |  |
|             | 9 9 9 9 9 12 12            | 1.88              | 1.88         | 1.88         | 1.88         | 2.49         | 2.49         | 12.5 (3.5-14.0)                | 3.47 (0.8-4.84)             | 3.60 |  |  |

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h / 24:24000Btu/h models

The above is the value for connecting with Wall Mounted type.

•2 or more indoor units should be connected.

•Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•The Total ability of connected indoor unit is up to 62000Btu from 34000Btu.





**6 Rooms Multi heating**

| AOYG45LBLA6 | Combination of Indoor Unit | HEATING OPERATION |        |        |        |        |                 |                 | Input Power (min-max) | COP  |  |  |
|-------------|----------------------------|-------------------|--------|--------|--------|--------|-----------------|-----------------|-----------------------|------|--|--|
|             |                            | Heating Capacity  |        |        |        |        |                 | kW              |                       |      |  |  |
|             |                            | Room 1            | Room 2 | Room 3 | Room 4 | Room 5 | Room 6          |                 |                       |      |  |  |
| 6 Room      | 7 7 7 7 7 7 7              | 2.20              | 2.20   | 2.20   | 2.20   | 2.20   | 2.20            | 13.2 (3.5-15.3) | 3.28 (0.7-4.20)       | 4.02 |  |  |
|             | 7 7 7 7 7 7 9              | 2.15              | 2.15   | 2.15   | 2.15   | 2.15   | 2.75            | 13.5 (3.5-16.0) | 3.37 (0.7-4.41)       | 4.00 |  |  |
|             | 7 7 7 7 7 12 12            | 2.01              | 2.01   | 2.01   | 2.01   | 3.45   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 7 14 14            | 1.93              | 1.93   | 1.93   | 1.93   | 1.93   | 3.85            | 13.5 (3.5-16.0) | 3.37 (0.7-4.41)       | 4.00 |  |  |
|             | 7 7 7 7 7 18 18            | 1.78              | 1.78   | 1.78   | 1.78   | 4.60   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 7 24 24            | 1.60              | 1.60   | 1.60   | 1.60   | 5.50   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 9 9 9              | 2.05              | 2.05   | 2.05   | 2.05   | 2.65   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 9 12 12            | 1.93              | 1.93   | 1.93   | 1.93   | 2.48   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 9 14 14            | 1.85              | 1.85   | 1.85   | 1.85   | 2.38   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 9 18 18            | 1.72              | 1.72   | 1.72   | 2.21   | 4.41   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 9 24 24            | 1.55              | 1.55   | 1.55   | 1.99   | 5.31   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 12 12 12           | 1.82              | 1.82   | 1.82   | 3.11   | 3.11   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 12 14 14           | 1.75              | 1.75   | 1.75   | 3.00   | 3.50   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 12 18 18           | 1.63              | 1.63   | 1.63   | 2.79   | 4.19   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 14 14 14           | 1.69              | 1.69   | 1.69   | 3.37   | 3.37   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 7 14 18 18           | 1.58              | 1.58   | 1.58   | 3.15   | 4.03   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 9 9 9 9              | 1.97              | 1.97   | 1.97   | 2.53   | 2.53   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 9 9 12 12            | 1.85              | 1.85   | 1.85   | 2.38   | 3.19   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 9 9 14 14            | 1.78              | 1.78   | 1.78   | 2.29   | 3.58   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 9 9 18 18            | 1.66              | 1.66   | 2.13   | 4.26   | 4.26   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 9 12 12 12           | 1.75              | 1.75   | 2.25   | 3.00   | 3.00   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 9 12 14 14           | 1.69              | 1.69   | 2.17   | 2.89   | 3.37   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 9 12 18 18           | 1.58              | 1.58   | 2.03   | 2.70   | 4.03   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 9 14 14 14           | 1.63              | 1.63   | 2.09   | 3.26   | 3.26   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 12 12 12 12          | 1.66              | 1.66   | 2.84   | 2.84   | 2.84   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 12 12 14 14          | 1.60              | 1.60   | 2.75   | 2.75   | 3.20   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 7 12 14 14 14          | 1.55              | 1.55   | 2.65   | 3.10   | 3.10   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 9 9 9 9 9              | 1.89              | 1.89   | 2.43   | 2.43   | 2.43   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 9 9 9 12 12            | 1.78              | 1.78   | 2.29   | 2.29   | 3.07   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 9 9 9 14 14            | 1.72              | 1.72   | 2.21   | 2.21   | 3.43   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 9 9 9 18 18            | 1.60              | 1.60   | 2.06   | 2.06   | 4.12   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 9 9 12 12 12           | 1.69              | 1.69   | 2.17   | 2.17   | 2.89   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 9 9 12 14 14           | 1.63              | 1.63   | 2.09   | 2.09   | 3.27   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 9 9 12 18 18           | 1.52              | 1.52   | 1.96   | 2.61   | 3.93   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 9 9 14 14 14           | 1.58              | 1.58   | 2.03   | 2.03   | 3.14   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 9 12 12 12 12          | 1.60              | 2.05   | 2.75   | 2.75   | 3.27   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 9 12 12 14 14          | 1.55              | 1.55   | 1.99   | 2.66   | 3.09   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 7 12 12 12 12 12         | 1.53              | 1.53   | 2.61   | 2.61   | 2.61   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 9 9 9 9 9 9              | 1.80              | 2.34   | 2.34   | 2.34   | 2.34   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 9 9 9 9 9 12             | 1.72              | 2.21   | 2.21   | 2.21   | 2.94   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 9 9 9 9 9 14             | 1.66              | 2.13   | 2.13   | 2.13   | 3.32   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 9 9 9 9 12 12            | 1.65              | 2.09   | 2.09   | 2.09   | 2.79   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 9 9 9 12 12 14           | 1.58              | 2.03   | 2.03   | 2.03   | 2.69   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 7 9 9 9 12 12 12           | 1.54              | 1.99   | 1.99   | 2.66   | 2.66   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 9 9 9 9 9 9 9              | 2.25              | 2.25   | 2.25   | 2.25   | 2.25   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 9 9 9 9 9 9 12             | 2.13              | 2.13   | 2.13   | 2.13   | 2.85   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |
|             | 9 9 9 9 9 12 12            | 2.03              | 2.03   | 2.03   | 2.03   | 2.69   | 13.5 (3.5-16.0) | 3.37 (0.7-4.41) | 4.00                  |      |  |  |

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h / 24:24000Btu/h models


•The above is the value for connecting with Wall Mounted type.

•2 or more indoor units should be connected.

•Heating capacity is based on 20°CDB (indoor temperature), 7°CDB/6°CWB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•The Total ability of connected indoor unit is up to 54000Btu from 27000Btu.



## PRODUCT LINEUP: MULTI SPLIT


# MULTI SPLIT Combination Table for 8 Rooms-Cooling/Heating

### 8 Rooms Multi cooling

| AOYG45LT8 | Combination of Indoor Unit                         |              |              |              |              |              |              |              | COOLING OPERATION |       |      |  |  |  |  |  | Input power |
|-----------|--|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------------|-------|------|--|--|--|--|--|-------------|
|           |  |              |              |              |              |              |              |              | Cooling Capacity  |       |      |  |  |  |  |  |             |
|           | Room 1<br>kW                                       | Room 2<br>kW | Room 3<br>kW | Room 4<br>kW | Room 5<br>kW | Room 6<br>kW | Room 7<br>kW | Room 8<br>kW | Total<br>kW       |       |      |  |  |  |  |  |             |
| 2 Room    | 24 24  | - - - - -    | - - - - -    | 7.03         | 7.03         | -            | -            | -            | -                 | 14.06 | 5.20 |  |  |  |  |  |             |
|           | 18 24  | - - - - -    | - - - - -    | 5.27         | 7.03         | -            | -            | -            | -                 | 12.30 | 4.24 |  |  |  |  |  |             |
|           | 18 18 24   | - - - - -    | - - - - -    | 4.63         | 4.63         | 6.18         | -            | -            | -                 | 15.45 | 5.89 |  |  |  |  |  |             |
|           | 18 18 18   | - - - - -    | - - - - -    | 5.01         | 5.01         | 5.01         | -            | -            | -                 | 15.03 | 5.90 |  |  |  |  |  |             |
|           | 14 24 24   | - - - - -    | - - - - -    | 3.54         | 6.07         | 6.07         | -            | -            | -                 | 15.68 | 5.87 |  |  |  |  |  |             |
|           | 14 18 24   | - - - - -    | - - - - -    | 3.84         | 4.94         | 6.59         | -            | -            | -                 | 15.37 | 5.90 |  |  |  |  |  |             |
|           | 14 18 18   | - - - - -    | - - - - -    | 4.10         | 5.27         | 5.27         | -            | -            | -                 | 14.64 | 5.50 |  |  |  |  |  |             |
|           | 14 14 24   | - - - - -    | - - - - -    | 4.10         | 4.10         | 7.03         | -            | -            | -                 | 15.23 | 5.79 |  |  |  |  |  |             |
|           | 14 14 18   | - - - - -    | - - - - -    | 4.10         | 4.10         | 5.27         | -            | -            | -                 | 13.47 | 4.89 |  |  |  |  |  |             |
|           | 14 <sup>a)</sup> 14 <sup>a)</sup> 14 <sup>a)</sup> | - - - - -    | - - - - -    | 4.10         | 4.10         | 4.10         | -            | -            | -                 | 12.30 | 4.24 |  |  |  |  |  |             |
|           | 12 24  | 24           | - - - - -    | 3.09         | 6.18         | 6.18         | -            | -            | -                 | 15.45 | 5.89 |  |  |  |  |  |             |
|           | 12 18 24   | - - - - -    | - - - - -    | 3.35         | 5.01         | 6.68         | -            | -            | -                 | 15.04 | 5.90 |  |  |  |  |  |             |
|           | 12 18 18   | - - - - -    | - - - - -    | 3.52         | 5.27         | 5.27         | -            | -            | -                 | 14.06 | 5.20 |  |  |  |  |  |             |
|           | 12 14 24   | - - - - -    | - - - - -    | 3.52         | 4.10         | 7.03         | -            | -            | -                 | 14.65 | 5.50 |  |  |  |  |  |             |
|           | 12 14 18   | - - - - -    | - - - - -    | 3.52         | 4.10         | 5.27         | -            | -            | -                 | 12.89 | 4.57 |  |  |  |  |  |             |
|           | 12 <sup>a)</sup> 14 <sup>a)</sup> 14 <sup>a)</sup> | - - - - -    | - - - - -    | 3.52         | 4.10         | 4.10         | -            | -            | -                 | 11.72 | 3.91 |  |  |  |  |  |             |
| 3 Room    | 12 12 24   | - - - - -    | - - - - -    | 3.52         | 3.52         | 7.03         | -            | -            | -                 | 14.07 | 5.20 |  |  |  |  |  |             |
|           | 12 12 18   | - - - - -    | - - - - -    | 3.52         | 3.52         | 5.27         | -            | -            | -                 | 12.31 | 4.24 |  |  |  |  |  |             |
|           | 9 24 24  | - - - - -    | - - - - -    | 2.46         | 6.54         | 6.54         | -            | -            | -                 | 15.54 | 5.90 |  |  |  |  |  |             |
|           | 9 18 24  | - - - - -    | - - - - -    | 2.64         | 5.27         | 7.03         | -            | -            | -                 | 14.94 | 5.65 |  |  |  |  |  |             |
|           | 9 18 18  | - - - - -    | - - - - -    | 2.64         | 5.27         | 5.27         | -            | -            | -                 | 13.18 | 4.73 |  |  |  |  |  |             |
|           | 9 14 24  | - - - - -    | - - - - -    | 2.64         | 4.10         | 7.03         | -            | -            | -                 | 13.77 | 5.05 |  |  |  |  |  |             |
|           | 9 14 18  | - - - - -    | - - - - -    | 2.64         | 4.10         | 5.27         | -            | -            | -                 | 12.01 | 4.08 |  |  |  |  |  |             |
|           | 9 12 24  | - - - - -    | - - - - -    | 2.64         | 3.52         | 7.03         | -            | -            | -                 | 13.19 | 4.73 |  |  |  |  |  |             |
|           | 9 12 18  | - - - - -    | - - - - -    | 2.64         | 3.52         | 5.27         | -            | -            | -                 | 11.43 | 3.74 |  |  |  |  |  |             |
|           | 9 9 24   | - - - - -    | - - - - -    | 2.64         | 2.64         | 7.03         | -            | -            | -                 | 12.31 | 4.24 |  |  |  |  |  |             |
|           | 7 24 24  | - - - - -    | - - - - -    | 1.93         | 6.64         | 6.64         | -            | -            | -                 | 15.21 | 5.90 |  |  |  |  |  |             |
|           | 7 18 24  | - - - - -    | - - - - -    | 2.05         | 5.27         | 7.03         | -            | -            | -                 | 14.35 | 5.35 |  |  |  |  |  |             |
|           | 7 18 18  | - - - - -    | - - - - -    | 2.05         | 5.27         | 5.27         | -            | -            | -                 | 12.59 | 4.41 |  |  |  |  |  |             |
|           | 7 14 24  | - - - - -    | - - - - -    | 2.05         | 4.10         | 7.03         | -            | -            | -                 | 13.18 | 4.73 |  |  |  |  |  |             |
|           | 7 14 18  | - - - - -    | - - - - -    | 2.05         | 4.10         | 5.27         | -            | -            | -                 | 11.42 | 3.74 |  |  |  |  |  |             |
|           | 7 12 24  | - - - - -    | - - - - -    | 2.05         | 3.52         | 7.03         | -            | -            | -                 | 12.60 | 4.41 |  |  |  |  |  |             |
|           | 7 9 24   | - - - - -    | - - - - -    | 2.05         | 2.64         | 7.03         | -            | -            | -                 | 11.72 | 3.91 |  |  |  |  |  |             |
|           | 14 14 14 18  | - - - - -    | - - - - -    | 3.60         | 3.60         | 3.60         | 4.63         | -            | -                 | 15.45 | 5.89 |  |  |  |  |  |             |
|           | 14 14 14 14  | - - - - -    | - - - - -    | 3.84         | 3.84         | 3.84         | 3.84         | -            | -                 | 15.37 | 5.90 |  |  |  |  |  |             |
|           | 12 14 18 18  | - - - - -    | - - - - -    | 3.04         | 3.54         | 4.55         | -            | -            | -                 | 15.68 | 5.87 |  |  |  |  |  |             |
|           | 12 14 14 18  | - - - - -    | - - - - -    | 3.15         | 3.67         | 3.67         | 4.72         | -            | -                 | 15.21 | 5.90 |  |  |  |  |  |             |
|           | 12 14 14 14  | - - - - -    | - - - - -    | 3.35         | 3.90         | 3.90         | -            | -            | -                 | 15.04 | 5.90 |  |  |  |  |  |             |
|           | 12 12 18 18  | - - - - -    | - - - - -    | 3.09         | 3.09         | 4.63         | 4.63         | -            | -                 | 15.45 | 5.89 |  |  |  |  |  |             |
|           | 12 12 14 24  | - - - - -    | - - - - -    | 3.04         | 3.04         | 3.54         | 6.07         | -            | -                 | 15.69 | 5.87 |  |  |  |  |  |             |
|           | 12 12 14 18  | - - - - -    | - - - - -    | 3.30         | 3.30         | 3.84         | 4.94         | -            | -                 | 15.38 | 5.90 |  |  |  |  |  |             |
|           | 12 12 14 14  | - - - - -    | - - - - -    | 3.52         | 3.52         | 4.10         | -            | -            | -                 | 15.24 | 5.79 |  |  |  |  |  |             |
|           | 12 12 12 24  | - - - - -    | - - - - -    | 3.09         | 3.09         | 3.09         | 6.18         | -            | -                 | 15.45 | 5.89 |  |  |  |  |  |             |
|           | 12 12 12 18  | - - - - -    | - - - - -    | 3.35         | 3.35         | 5.01         | -            | -            | -                 | 15.05 | 5.90 |  |  |  |  |  |             |
|           | 12 12 12 12  | - - - - -    | - - - - -    | 3.52         | 3.52         | 3.52         | 4.10         | -            | -                 | 14.66 | 5.50 |  |  |  |  |  |             |
|           | 9 14 18 18   | - - - - -    | - - - - -    | 2.34         | 3.28         | 4.90         | -            | -            | -                 | 15.33 | 5.89 |  |  |  |  |  |             |
|           | 9 12 14 18   | - - - - -    | - - - - -    | 2.53         | 3.37         | 3.93         | 5.05         | -            | -                 | 14.87 | 5.90 |  |  |  |  |  |             |
|           | 9 12 14 14   | - - - - -    | - - - - -    | 2.64         | 3.52         | 4.10         | 4.10         | -            | -                 | 14.36 | 5.35 |  |  |  |  |  |             |
|           | 9 12 12 24   | - - - - -    | - - - - -    | 2.46         | 3.28         | 3.28         | 6.54         | -            | -                 | 15.55 | 5.90 |  |  |  |  |  |             |
|           | 9 12 12 18   | - - - - -    | - - - - -    | 2.64         | 3.52         | 3.52         | 5.27         | -            | -                 | 14.95 | 5.65 |  |  |  |  |  |             |
|           | 9 12 12 14   | - - - - -    | - - - - -    | 2.64         | 3.52         | 3.52         | 4.10         | -            | -                 | 13.78 | 5.05 |  |  |  |  |  |             |
|           | 9 12 12 12   | - - - - -    | - - - - -    | 2.64         | 3.52         | 3.52         | 3.52         | -            | -                 | 13.20 | 4.73 |  |  |  |  |  |             |
|           | 9 9 18 24  | - - - - -    | - - - - -    | 2.32         | 2.32         | 4.63         | 6.18         | -            | -                 | 15.45 | 5.89 |  |  |  |  |  |             |
|           | 9 9 18 18  | - - - - -    | - - - - -    | 2.51         | 2.51         | 5.01         | -            | -            | -                 | 15.04 | 5.90 |  |  |  |  |  |             |
|           | 9 9 14 24  | - - - - -    | - - - - -    | 2.47         | 2.47         | 3.84         | 6.59         | -            | -                 | 15.38 | 5.90 |  |  |  |  |  |             |
|           | 9 9 14 18  | - - - - -    | - - - - -    | 2.64         | 2.64         | 4.10         | 5.27         | -            | -                 | 14.65 | 5.50 |  |  |  |  |  |             |
|           | 9 9 14 14  | - - - - -    | - - - - -    | 2.64         | 2.64         | 4.10         | 4.10         | -            | -                 | 13.48 | 4.89 |  |  |  |  |  |             |
|           | 9 9 12 24  | - - - - -    | - - - - -    | 2.51         | 2.51         | 3.35         | 6.68         | -            | -                 | 15.05 | 5.90 |  |  |  |  |  |             |
|           | 9 9 12 18  | - - - - -    | - - - - -    | 2.64         | 2.64         | 3.52         | 5.27         | -            | -                 | 14.07 | 5.20 |  |  |  |  |  |             |
|           | 9 9 12 14  | - - - - -    | - - - - -    | 2.64         | 2.64         | 3.52         | 4.10         | -            | -                 | 12.90 | 4.57 |  |  |  |  |  |             |
|           | 9 9 12 12  | - - - - -    | - - - - -    | 2.64         | 2.64         | 3.52         | 3.52         | -            | -                 | 12.32 | 4.24 |  |  |  |  |  |             |
|           | 9 9 9 24   | - - - - -    | - - - - -    | 2.64         | 2.64         | 2.64         | 7.03         | -            | -                 | 14.95 | 5.65 |  |  |  |  |  |             |
|           | 9 9 9 18   | - - - - -    | - - - - -    | 2.64         | 2.64         | 2.64         | 5.27         | -            | -                 | 13.19 | 4.73 |  |  |  |  |  |             |
|           | 9 9 9 14   | - - - - -    | - - - - -    | 2.64         | 2.64         | 2.64         | 4.10         | -            | -                 | 12.02 | 4.08 |  |  |  |  |  |             |
|           | 7 18 18 18   | - - - - -    | - - - - -    | 1.79         | 4.59         | 4.59         | 4.59         | -            | -                 | 11.44 | 3.74 |  |  |  |  |  |             |
|           | 7 14 18 18   | - - - - -    | - - - - -    | 1.91         | 3.82         | 4.91         | 4.91         | -            | -                 | 15.56 | 5.88 |  |  |  |  |  |             |
|           | 7 14 14 24   | - - - - -    | - - - - -    | 1.82         | 3.64         | 3.64         | 6.24         | -            | -                 | 15.33 | 5.89 |  |  |  |  |  |             |
|           | 7 14 14 18   | - - - - -    | - - - - -    | 1.96         | 3.93         | 3.93         | 5.05         | -            | -                 | 14.87 | 5.90 |  |  |  |  |  |             |
|           | 7 14 14 14   | - - - - -    | - - - - -    | 2.05         | 4.10         | 4.10         | -            | -            | -                 | 14.35 | 5.35 |  |  |  |  |  |             |
|           | 7 12 18 24   | - - - - -    | - - - - -    | 1.79         | 3.07         | 4.59         | 6.12         | -            | -                 | 15.57 | 5.88 |  |  |  |  |  |             |
|           | 7 12 18 18   | - - - - -    | - - - - -    | 1.93         | 3.32         | 4.97         | 4.97         | -            | -                 | 15.21 | 5.90 |  |  |  |  |  |             |
|           | 7 12 14 24   | - - - - -    | - - - - -    | 1.91         |              |              |              |              |                   |       |      |  |  |  |  |  |             |

## 8 Rooms Multi cooling

| AOYG45LTB8 | Combination of Indoor Unit | COOLING OPERATION |              |              |              |              |              |              |              |             | Input power |  |
|------------|----------------------------|-------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|-------------|--|
|            |                            | Cooling Capacity  |              |              |              |              |              |              |              |             |             |  |
|            |                            | Room 1<br>kW      | Room 2<br>kW | Room 3<br>kW | Room 4<br>kW | Room 5<br>kW | Room 6<br>kW | Room 7<br>kW | Room 8<br>kW | Total<br>kW |             |  |
| 4 Room     | 7 7 14 18 - - - -          | 2.05              | 2.05         | 4.10         | 5.27         | -            | -            | -            | -            | 13.47       | 4.89        |  |
|            | 7 7 14 14 - - - -          | 2.05              | 2.05         | 4.10         | 4.10         | -            | -            | -            | -            | 12.30       | 4.24        |  |
|            | 7 7 12 24 - - - -          | 2.05              | 2.05         | 3.52         | 7.03         | -            | -            | -            | -            | 14.65       | 5.50        |  |
|            | 7 7 12 18 - - - -          | 2.05              | 2.05         | 3.52         | 5.27         | -            | -            | -            | -            | 12.89       | 4.57        |  |
|            | 7 7 12 14 - - - -          | 2.05              | 2.05         | 3.52         | 4.10         | -            | -            | -            | -            | 11.72       | 3.91        |  |
|            | 7 7 9 24 - - - -           | 2.05              | 2.05         | 2.64         | 7.03         | -            | -            | -            | -            | 13.77       | 5.05        |  |
|            | 7 7 9 18 - - - -           | 2.05              | 2.05         | 2.64         | 5.27         | -            | -            | -            | -            | 12.01       | 4.08        |  |
|            | 7 7 7 24 - - - -           | 2.05              | 2.05         | 2.05         | 7.03         | -            | -            | -            | -            | 13.18       | 4.73        |  |
|            | 7 7 7 18 - - - -           | 2.05              | 2.05         | 2.05         | 5.27         | -            | -            | -            | -            | 11.42       | 3.74        |  |
|            | 12 12 12 14 - - - -        | 3.04              | 3.04         | 3.04         | 3.54         | -            | -            | -            | -            | 15.69       | 5.87        |  |
|            | 12 12 12 12 - - - -        | 3.09              | 3.09         | 3.09         | 3.09         | -            | -            | -            | -            | 15.46       | 5.89        |  |
|            | 9 12 12 14 - - - -         | 2.30              | 3.07         | 3.07         | 3.57         | -            | -            | -            | -            | 15.57       | 5.88        |  |
|            | 9 12 12 12 14 - - -        | 2.34              | 3.12         | 3.12         | 3.63         | -            | -            | -            | -            | 15.34       | 5.89        |  |
|            | 9 12 12 12 12 - - -        | 2.46              | 3.27         | 3.27         | 3.27         | -            | -            | -            | -            | 15.55       | 5.90        |  |
|            | 9 9 14 14 - - - -          | 2.32              | 2.32         | 3.60         | 3.60         | -            | -            | -            | -            | 15.45       | 5.89        |  |
|            | 9 9 12 14 18 - - -         | 2.28              | 2.28         | 3.04         | 3.54         | 4.55         | -            | -            | -            | 15.69       | 5.87        |  |
|            | 9 9 12 14 14 - - -         | 2.36              | 2.36         | 3.15         | 3.67         | 3.67         | -            | -            | -            | 15.21       | 5.90        |  |
|            | 9 9 12 12 18 - - -         | 2.32              | 2.32         | 3.09         | 3.09         | 4.63         | -            | -            | -            | 15.45       | 5.89        |  |
|            | 9 9 12 12 14 - - -         | 2.47              | 2.47         | 3.30         | 3.30         | 3.84         | -            | -            | -            | 15.38       | 5.90        |  |
|            | 9 9 12 12 12 - - -         | 2.51              | 2.51         | 3.34         | 3.34         | 3.34         | -            | -            | -            | 15.05       | 5.90        |  |
|            | 9 9 9 14 18 - - -          | 2.34              | 2.34         | 3.64         | 4.67         | -            | -            | -            | -            | 15.33       | 5.89        |  |
|            | 9 9 9 14 14 - - -          | 2.49              | 2.49         | 2.49         | 3.87         | 3.87         | -            | -            | -            | 15.21       | 5.90        |  |
|            | 9 9 9 12 18 - - -          | 2.46              | 2.46         | 2.46         | 3.28         | 4.90         | -            | -            | -            | 15.55       | 5.90        |  |
|            | 9 9 9 9 14 - - -           | 2.53              | 2.53         | 2.53         | 3.37         | 3.93         | -            | -            | -            | 14.88       | 5.90        |  |
|            | 9 9 9 9 12 - - -           | 2.64              | 2.64         | 2.64         | 3.52         | 3.52         | -            | -            | -            | 14.96       | 5.65        |  |
|            | 9 9 9 9 9 18 - -           | 2.51              | 2.51         | 2.51         | 5.01         | -            | -            | -            | -            | 15.05       | 5.90        |  |
|            | 9 9 9 9 9 14 - -           | 2.64              | 2.64         | 2.64         | 4.10         | -            | -            | -            | -            | 14.66       | 5.50        |  |
|            | 9 9 9 9 12 - - -           | 2.64              | 2.64         | 2.64         | 3.52         | -            | -            | -            | -            | 14.08       | 5.20        |  |
|            | 9 9 9 9 9 - - -            | 2.64              | 2.64         | 2.64         | 2.64         | -            | -            | -            | -            | 13.20       | 4.73        |  |
|            | 7 12 14 14 14 - - -        | 1.79              | 3.07         | 3.57         | 3.57         | -            | -            | -            | -            | 15.57       | 5.88        |  |
|            | 7 12 12 14 14 - - -        | 1.82              | 3.12         | 3.12         | 3.64         | 3.64         | -            | -            | -            | 15.33       | 5.89        |  |
|            | 7 12 12 12 18 - - -        | 1.79              | 3.07         | 3.07         | 4.59         | -            | -            | -            | -            | 15.57       | 5.88        |  |
|            | 7 12 12 12 14 - - -        | 1.91              | 3.28         | 3.28         | 3.28         | 3.82         | -            | -            | -            | 15.55       | 5.90        |  |
|            | 7 12 12 12 12 - - -        | 1.93              | 3.32         | 3.32         | 3.32         | 3.32         | -            | -            | -            | 15.22       | 5.90        |  |
|            | 7 9 14 14 18 - - -         | 1.77              | 2.28         | 3.54         | 3.54         | 4.55         | -            | -            | -            | 15.68       | 5.87        |  |
|            | 7 9 14 14 14 - - -         | 1.84              | 2.36         | 3.67         | 3.67         | 3.67         | -            | -            | -            | 15.21       | 5.90        |  |
|            | 7 9 12 14 18 - - -         | 1.80              | 2.32         | 3.09         | 3.60         | 4.63         | -            | -            | -            | 15.45       | 5.89        |  |
|            | 7 9 12 14 14 - - -         | 1.92              | 2.47         | 3.30         | 3.84         | 3.84         | -            | -            | -            | 15.38       | 5.90        |  |
|            | 7 9 12 12 18 - - -         | 1.83              | 2.36         | 3.15         | 3.15         | 4.72         | -            | -            | -            | 15.21       | 5.90        |  |
|            | 7 9 12 12 14 - - -         | 1.95              | 2.51         | 3.35         | 3.35         | 3.90         | -            | -            | -            | 15.05       | 5.90        |  |
|            | 7 9 12 12 12 - - -         | 2.05              | 2.64         | 3.52         | 3.52         | 3.52         | -            | -            | -            | 15.25       | 5.79        |  |
|            | 7 9 9 18 18 - - -          | 1.79              | 2.30         | 2.30         | 4.59         | 4.59         | -            | -            | -            | 15.57       | 5.88        |  |
|            | 7 9 9 14 18 - - -          | 1.91              | 2.46         | 2.46         | 3.82         | 4.90         | -            | -            | -            | 15.54       | 5.90        |  |
|            | 7 9 9 14 14 - - -          | 1.96              | 2.53         | 2.53         | 3.93         | 3.93         | -            | -            | -            | 14.87       | 5.90        |  |
|            | 7 9 9 9 12 - - -           | 1.79              | 2.30         | 2.30         | 3.07         | 6.12         | -            | -            | -            | 15.57       | 5.88        |  |
|            | 7 9 9 12 18 - - -          | 1.93              | 2.49         | 2.49         | 3.32         | 4.97         | -            | -            | -            | 15.21       | 5.90        |  |
|            | 7 9 9 12 14 - - -          | 2.05              | 2.64         | 2.64         | 3.52         | 4.10         | -            | -            | -            | 14.95       | 5.65        |  |
|            | 7 9 9 12 12 - - -          | 2.05              | 2.64         | 2.64         | 3.52         | 3.52         | -            | -            | -            | 14.37       | 5.35        |  |
|            | 7 9 9 9 24 - - -           | 1.83              | 2.36         | 2.36         | 2.36         | 6.29         | -            | -            | -            | 15.21       | 5.90        |  |
|            | 7 9 9 9 18 - - -           | 2.05              | 2.64         | 2.64         | 5.27         | -            | -            | -            | -            | 15.24       | 5.79        |  |
|            | 7 9 9 9 14 - - -           | 2.05              | 2.64         | 2.64         | 4.10         | -            | -            | -            | -            | 14.07       | 5.20        |  |
|            | 7 9 9 9 12 - - -           | 2.05              | 2.64         | 2.64         | 3.52         | -            | -            | -            | -            | 13.49       | 4.89        |  |
|            | 7 9 9 9 9 - - -            | 2.05              | 2.64         | 2.64         | 2.64         | -            | -            | -            | -            | 12.61       | 4.41        |  |
|            | 7 7 14 14 18 - - -         | 1.80              | 1.80         | 1.80         | 3.60         | 4.63         | -            | -            | -            | 15.45       | 5.89        |  |
|            | 7 7 14 14 14 - - -         | 1.92              | 1.92         | 1.92         | 3.84         | 3.84         | -            | -            | -            | 15.37       | 5.90        |  |
|            | 7 7 12 18 18 - - -         | 1.77              | 1.77         | 3.04         | 4.55         | 4.55         | -            | -            | -            | 15.68       | 5.87        |  |
|            | 7 7 12 14 18 - - -         | 1.84              | 1.84         | 3.15         | 3.67         | 4.72         | -            | -            | -            | 15.21       | 5.90        |  |
|            | 7 7 12 14 14 - - -         | 1.95              | 1.95         | 3.35         | 3.90         | 3.90         | -            | -            | -            | 15.04       | 5.90        |  |
|            | 7 7 12 12 24 - - -         | 1.77              | 1.77         | 3.04         | 3.04         | 6.07         | -            | -            | -            | 15.69       | 5.87        |  |
|            | 7 7 12 12 14 - - -         | 2.05              | 2.05         | 3.52         | 4.10         | -            | -            | -            | -            | 15.24       | 5.79        |  |
|            | 7 7 12 12 12 - - -         | 2.05              | 2.05         | 3.52         | 3.52         | -            | -            | -            | -            | 14.66       | 5.50        |  |
|            | 7 7 9 18 18 - - -          | 1.82              | 1.82         | 2.34         | 3.32         | 4.67         | -            | -            | -            | 15.33       | 5.89        |  |
|            | 7 7 9 14 24 - - -          | 1.79              | 1.79         | 2.34         | 2.34         | 6.12         | -            | -            | -            | 15.57       | 5.88        |  |
|            | 7 7 9 14 18 - - -          | 1.79              | 1.79         | 2.30         | 3.57         | 6.12         | -            | -            | -            | 15.57       | 5.88        |  |
|            | 7 7 9 14 14 - - -          | 1.93              | 1.93         | 2.49         | 3.87         | 4.97         | -            | -            | -            | 15.21       | 5.90        |  |
|            | 7 7 9 14 12 - - -          | 2.05              | 2.05         | 2.64         | 4.10         | -            | -            | -            | -            | 14.94       | 5.65        |  |
|            | 7 7 9 12 24 - - -          | 1.82              | 1.82         | 2.34         | 3.12         | 6.23         | -            | -            | -            | 15.33       | 5.89        |  |
|            | 7 7 9 12 18 - - -          | 1.96              | 1.96         | 2.53         | 3.37         | 5.05         | -            | -            | -            | 14.87       | 5.90        |  |
|            | 7 7 9 12 14 - - -          | 2.05              | 2.05         | 2.64         | 3.52         | 4.10         | -            | -            | -            | 14.36       | 5.35        |  |
|            | 7 7 9 12 12 - - -          | 2.05              | 2.05         | 2.64         | 3.52         | 3.52         | -            | -            | -            | 13.78       | 5.05        |  |
|            | 7 7 9 9 24 - - -           | 1.92              | 1.92         | 2.47         | 2.47         | 6.59         | -            | -            | -            | 15.38       | 5.90        |  |
|            | 7 7 9 9 18 - - -           | 2.05              | 2.05         | 2.64         | 5.27         | -            | -            | -            | -            | 14.65       | 5.50        |  |
|            | 7 7 9 9 14 - - -           | 2.05              | 2.05         | 2.64         | 4.10         | -            | -            | -            | -            | 13.48       | 4.89        |  |
|            | 7 7 9 9 12 - - -           | 2.05              | 2.05         | 2.64         | 3.52         | -            | -            | -            | -            | 12.90       | 4.57        |  |
|            | 7 7 9 9 9 - - -            | 2.05              | 2.05         | 2.64         | 2.64         | -            | -            | -            | -            | 12.02       | 4.08        |  |
|            | 7 7 7 18 18 - - -          | 1.91              | 1.91         | 1.91         | 4.91         | 4.91         | -            | -            | -            | 15.54       | 5.90        |  |
|            | 7 7 7 14 18 - - -          | 1.96              | 1.96         | 1.96         | 3.93         | 5.05         | -            | -            | -            | 14.87       | 5.90        |  |
|            | 7 7 7 14 14 - - -          | 2.05              | 2.05         | 2.05         | 4.10         | 4.10         | -            | -            | -            | 14.35       | 5.35        |  |
|            | 7 7 7 12 24 - - -          | 1.91              | 1.91         | 1.91         | 3.28         | 6.54         | -            | -            | -            | 15.54       | 5.90        |  |
|            | 7 7 7 12 18 - - -          | 2.05              | 2.05         | 2.05         | 3.52         | 5.27         | -            | -            | -            | 14.94       | 5.65        |  |
|            | 7 7 7 12 14 - - -          | 2.05              | 2.05         | 2.05         | 3.52         | 4.10         | -            | -            | -            | 13.77       | 5.05        |  |
|            | 7 7 7 12 12 - - -          | 2.05              | 2.05         | 2.05         | 3.52         | 3.52         | -            | -            | -            | 13.19       | 4.73        |  |
|            | 7 7 7 9 24 - - -           | 1.95              | 1.95         | 1.95         | 2.51         | 6.68         | -            | -            | -            | 15.04       | 5.90        |  |
|            | 7 7 7 9 18 - - -           | 2.05              | 2.05         | 2.05         | 2.64         | 5.27         | -            | -            | -            |             |             |  |



## PRODUCT LINEUP: MULTI SPLIT

# MULTI SPLIT Combination Table for 8 Rooms-Cooling/Heating

### 8 Rooms Multi cooling

| AOYG45LTB8 | Combination<br>of Indoor Unit | COOLING OPERATION |              |              |              |              |              |              |              |             | Input power<br>kW |      |
|------------|-------------------------------|-------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|-------------------|------|
|            |                               | Cooling Capacity  |              |              |              |              |              |              |              |             |                   |      |
|            |                               | Room 1<br>kW      | Room 2<br>kW | Room 3<br>kW | Room 4<br>kW | Room 5<br>kW | Room 6<br>kW | Room 7<br>kW | Room 8<br>kW | Total<br>kW |                   |      |
| 6 Room     | 7 9 9 9 9 9 18 - -            | 1.79              | 2.30         | 2.30         | 2.30         | 2.30         | 4.59         | -            | -            | 15.57       | 5.88              |      |
|            | 7 9 9 9 9 9 12 - -            | 1.93              | 2.49         | 2.49         | 2.49         | 3.32         | -            | -            | -            | 15.22       | 5.90              |      |
|            | 7 9 9 9 9 9 9 - -             | 2.05              | 2.64         | 2.64         | 2.64         | 2.64         | -            | -            | -            | 15.25       | 5.79              |      |
|            | 7 7 12 12 12 12 - -           | 1.77              | 1.77         | 3.04         | 3.04         | 3.04         | -            | -            | -            | 15.69       | 5.87              |      |
|            | 7 7 9 12 12 14 - -            | 1.79              | 1.79         | 2.30         | 3.07         | 3.07         | 3.57         | -            | -            | 15.57       | 5.88              |      |
|            | 7 7 9 12 12 12 - -            | 1.82              | 1.82         | 2.34         | 3.12         | 3.12         | 3.12         | -            | -            | 15.34       | 5.89              |      |
|            | 7 7 9 9 14 14 - -             | 1.80              | 1.80         | 2.32         | 2.32         | 3.60         | 3.60         | -            | -            | 15.45       | 5.89              |      |
|            | 7 7 9 9 12 18 - -             | 1.77              | 1.77         | 2.28         | 2.28         | 3.04         | 4.55         | -            | -            | 15.69       | 5.87              |      |
|            | 7 7 9 9 12 14 - -             | 1.83              | 1.83         | 2.36         | 2.36         | 3.15         | 3.67         | -            | -            | 15.21       | 5.90              |      |
|            | 7 7 9 9 12 12 - -             | 1.92              | 1.92         | 2.47         | 2.47         | 3.30         | 3.30         | -            | -            | 15.38       | 5.90              |      |
|            | 7 7 9 9 18 - -                | 1.82              | 1.82         | 2.34         | 2.34         | 2.34         | 4.67         | -            | -            | 15.33       | 5.89              |      |
|            | 7 7 9 9 14 - -                | 1.93              | 1.93         | 2.49         | 2.49         | 3.87         | -            | -            | -            | 15.21       | 5.90              |      |
|            | 7 7 9 9 12 - -                | 1.96              | 1.96         | 2.53         | 2.53         | 2.53         | 3.37         | -            | -            | 14.88       | 5.90              |      |
|            | 7 7 9 9 9 9 - -               | 2.05              | 2.05         | 2.64         | 2.64         | 2.64         | -            | -            | -            | 14.66       | 5.50              |      |
|            | 7 7 7 12 14 - -               | 1.79              | 1.79         | 1.79         | 3.07         | 3.57         | 3.57         | -            | -            | 15.57       | 5.88              |      |
|            | 7 7 7 12 12 - -               | 1.82              | 1.82         | 1.82         | 3.12         | 3.12         | 3.64         | -            | -            | 15.33       | 5.89              |      |
|            | 7 7 7 12 12 - -               | 1.91              | 1.91         | 1.91         | 3.28         | 3.28         | 3.28         | -            | -            | 15.55       | 5.90              |      |
|            | 7 7 7 9 14 - -                | 1.77              | 1.77         | 2.28         | 2.28         | 3.54         | 4.55         | -            | -            | 15.68       | 5.87              |      |
|            | 7 7 7 9 14 - -                | 1.84              | 1.84         | 1.84         | 2.36         | 3.67         | -            | -            | -            | 15.21       | 5.90              |      |
|            | 7 7 7 9 12 - -                | 1.80              | 1.80         | 1.80         | 2.32         | 3.09         | 4.63         | -            | -            | 15.45       | 5.89              |      |
|            | 7 7 7 9 12 18 - -             | 1.92              | 1.92         | 1.92         | 2.47         | 3.30         | 3.84         | -            | -            | 15.38       | 5.90              |      |
|            | 7 7 7 9 12 12 - -             | 1.95              | 1.95         | 1.95         | 2.51         | 3.35         | 3.35         | -            | -            | 15.05       | 5.90              |      |
| 7 Room     | 7 7 7 9 18 - -                | 1.91              | 1.91         | 1.91         | 2.46         | 2.46         | 4.90         | -            | -            | 15.54       | 5.90              |      |
|            | 7 7 7 9 14 - -                | 1.96              | 1.96         | 1.96         | 2.53         | 2.53         | 3.93         | -            | -            | 14.87       | 5.90              |      |
|            | 7 7 7 9 12 - -                | 2.05              | 2.05         | 2.05         | 2.64         | 2.64         | 3.52         | -            | -            | 14.95       | 5.65              |      |
|            | 7 7 7 9 9 9 - -               | 2.05              | 2.05         | 2.05         | 2.64         | 2.64         | 2.64         | -            | -            | 14.07       | 5.20              |      |
|            | 7 7 7 7 14 - -                | 1.80              | 1.80         | 1.80         | 1.80         | 1.80         | 3.60         | -            | -            | 15.45       | 5.89              |      |
|            | 7 7 7 7 14 - -                | 1.92              | 1.92         | 1.92         | 1.92         | 1.92         | 3.84         | -            | -            | 15.37       | 5.90              |      |
|            | 7 7 7 7 12 - -                | 1.84              | 1.84         | 1.84         | 1.84         | 1.84         | 3.15         | 4.72         | -            | -           | 15.21             | 5.90 |
|            | 7 7 7 7 12 - -                | 1.95              | 1.95         | 1.95         | 1.95         | 1.95         | 3.35         | 3.90         | -            | -           | 15.04             | 5.90 |
|            | 7 7 7 7 12 - -                | 2.05              | 2.05         | 2.05         | 2.05         | 2.05         | 3.52         | 3.52         | -            | -           | 15.24             | 5.79 |
|            | 7 7 7 7 9 24 - -              | 1.79              | 1.79         | 1.79         | 1.79         | 1.79         | 2.30         | 6.12         | -            | -           | 15.57             | 5.88 |
|            | 7 7 7 7 9 18 - -              | 1.93              | 1.93         | 1.93         | 1.93         | 1.93         | 2.49         | 4.97         | -            | -           | 15.21             | 5.90 |
|            | 7 7 7 7 9 14 - -              | 2.05              | 2.05         | 2.05         | 2.05         | 2.05         | 2.64         | 4.10         | -            | -           | 14.94             | 5.65 |
|            | 7 7 7 7 9 12 - -              | 2.05              | 2.05         | 2.05         | 2.05         | 2.05         | 2.64         | 3.52         | -            | -           | 14.36             | 5.35 |
|            | 7 7 7 7 9 9 - -               | 2.05              | 2.05         | 2.05         | 2.05         | 2.05         | 2.64         | -            | -            | 13.48       | 4.89              |      |
|            | 7 7 7 7 7 7 24 - -            | 1.82              | 1.82         | 1.82         | 1.82         | 1.82         | 6.24         | -            | -            | 15.33       | 5.89              |      |
|            | 7 7 7 7 7 7 18 - -            | 1.96              | 1.96         | 1.96         | 1.96         | 1.96         | 5.05         | -            | -            | 14.87       | 5.90              |      |
|            | 7 7 7 7 7 7 12 - -            | 2.05              | 2.05         | 2.05         | 2.05         | 2.05         | 4.10         | -            | -            | 14.35       | 5.35              |      |
|            | 7 7 7 7 7 7 9 - -             | 2.05              | 2.05         | 2.05         | 2.05         | 2.05         | 2.64         | -            | -            | 13.77       | 5.05              |      |
|            | 7 7 7 7 7 7 7 - -             | 2.05              | 2.05         | 2.05         | 2.05         | 2.05         | 2.05         | -            | -            | 12.89       | 4.57              |      |
|            | 7 9 9 9 9 9 9 - -             | 1.78              | 2.30         | 2.30         | 2.30         | 2.30         | 2.30         | -            | -            | 15.57       | 5.88              |      |
| 8 Room     | 7 9 9 9 9 9 12 - -            | 1.77              | 2.28         | 2.28         | 2.28         | 2.28         | 3.04         | -            | -            | 15.69       | 5.87              |      |
|            | 7 9 9 9 9 9 9 - -             | 1.82              | 1.82         | 1.82         | 1.82         | 1.82         | 2.34         | 2.34         | -            | 15.34       | 5.89              |      |
|            | 7 7 9 9 9 9 14 - -            | 1.77              | 1.77         | 1.77         | 1.77         | 1.77         | 2.28         | 2.28         | 3.54         | -           | 15.69             | 5.87 |
|            | 7 7 7 9 9 9 12 - -            | 1.80              | 1.80         | 1.80         | 1.80         | 1.80         | 2.32         | 2.32         | 3.09         | -           | 15.45             | 5.89 |
|            | 7 7 7 9 9 9 12 - -            | 1.91              | 1.91         | 1.91         | 1.91         | 1.91         | 2.46         | 2.46         | 2.46         | -           | 15.55             | 5.90 |
|            | 7 7 7 7 12 12 - -             | 1.79              | 1.79         | 1.79         | 1.79         | 1.79         | 2.30         | 3.07         | 3.07         | -           | 15.57             | 5.88 |
|            | 7 7 7 7 9 14 - -              | 1.80              | 1.80         | 1.80         | 1.80         | 1.80         | 2.32         | 2.32         | 3.60         | -           | 15.45             | 5.89 |
|            | 7 7 7 7 9 12 - -              | 1.83              | 1.83         | 1.83         | 1.83         | 1.83         | 2.36         | 2.36         | 3.15         | -           | 15.21             | 5.90 |
|            | 7 7 7 7 9 9 - -               | 1.93              | 1.93         | 1.93         | 1.93         | 1.93         | 2.49         | 2.49         | 2.49         | -           | 15.21             | 5.90 |
|            | 7 7 7 7 7 12 14 - -           | 1.79              | 1.79         | 1.79         | 1.79         | 1.79         | 1.79         | 3.07         | 3.57         | -           | 15.57             | 5.88 |
|            | 7 7 7 7 7 12 12 - -           | 1.82              | 1.82         | 1.82         | 1.82         | 1.82         | 1.82         | 3.12         | -            | -           | 15.33             | 5.89 |
|            | 7 7 7 7 7 9 18 - -            | 1.77              | 1.77         | 1.77         | 1.77         | 1.77         | 2.28         | 2.28         | 4.55         | -           | 15.68             | 5.87 |
|            | 7 7 7 7 7 7 9 14 - -          | 1.84              | 1.84         | 1.84         | 1.84         | 1.84         | 1.84         | 1.84         | 3.67         | -           | 15.21             | 5.90 |
|            | 7 7 7 7 7 7 9 12 - -          | 1.92              | 1.92         | 1.92         | 1.92         | 1.92         | 1.92         | 2.47         | 3.30         | -           | 15.38             | 5.90 |
|            | 7 7 7 7 7 7 9 9 - -           | 1.96              | 1.96         | 1.96         | 1.96         | 1.96         | 1.96         | 1.96         | 2.53         | -           | 14.87             | 5.90 |
|            | 7 7 7 7 7 7 7 18 - -          | 1.80              | 1.80         | 1.80         | 1.80         | 1.80         | 1.80         | 1.80         | 4.63         | -           | 15.45             | 5.89 |
|            | 7 7 7 7 7 7 7 14 - -          | 1.92              | 1.92         | 1.92         | 1.92         | 1.92         | 1.92         | 1.92         | 3.84         | -           | 15.37             | 5.90 |
|            | 7 7 7 7 7 7 7 12 - -          | 1.95              | 1.95         | 1.95         | 1.95         | 1.95         | 1.95         | 1.95         | 3.35         | -           | 15.04             | 5.90 |
|            | 7 7 7 7 7 7 7 9 - -           | 2.05              | 2.05         | 2.05         | 2.05         | 2.05         | 2.05         | 2.05         | 2.64         | -           | 14.94             | 5.65 |
|            | 7 7 7 7 7 7 7 7 - -           | 2.05              | 2.05         | 2.05         | 2.05         | 2.05         | 2.05         | 2.05         | 2.05         | -           | 14.35             | 5.35 |

Note: • Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature)

• Pipe Length: 5 m (Outdoor unit to Branch box), 3 m (Branch box to Indoor unit)


• Height difference: 0 m (Outdoor unit to Indoor unit)

• The values in this table should be used only as a guide. These values are calculated at standard conditions.

To fix your selection of models, select them according to "Model Selection" in the D&T manual.

**8 Rooms Multi heating**

| AOYG45LTB8 | Combination of Indoor Unit | HEATING OPERATION |              |              |              |              |              |              |              |             | Input power |  |
|------------|----------------------------|-------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|-------------|--|
|            |                            | Heating Capacity  |              |              |              |              |              |              |              |             |             |  |
|            |                            | Room 1<br>kW      | Room 2<br>kW | Room 3<br>kW | Room 4<br>kW | Room 5<br>kW | Room 6<br>kW | Room 7<br>kW | Room 8<br>kW | Total<br>kW |             |  |
| 2 Room     | 24 24 - - - - - -          | 7.91              | 7.91         | -            | -            | -            | -            | -            | -            | 15.82       | 5.07        |  |
|            | 18 24 - - - - - -          | 5.86              | 7.91         | -            | -            | -            | -            | -            | -            | 13.77       | 4.21        |  |
|            | 18 18 24 - - - - -         | 5.32              | 5.32         | 7.18         | -            | -            | -            | -            | -            | 17.92       | 5.98        |  |
|            | 18 18 18 - - - - -         | 5.79              | 5.79         | 5.79         | -            | -            | -            | -            | -            | 17.38       | 5.63        |  |
|            | 14 24 24 - - - - -         | 4.26              | 7.02         | 7.02         | -            | -            | -            | -            | -            | 18.31       | 5.98        |  |
|            | 14 18 24 - - - - -         | 4.59              | 5.61         | 7.57         | -            | -            | -            | -            | -            | 16.46       | 5.11        |  |
|            | 14 18 18 - - - - -         | 4.78              | 5.84         | 5.84         | -            | -            | -            | -            | -            | 17.77       | 5.70        |  |
|            | 14 14 24 - - - - -         | 4.75              | 4.75         | 7.82         | -            | -            | -            | -            | -            | 17.32       | 5.23        |  |
|            | 14 14 18 - - - - -         | 4.80              | 4.80         | 5.86         | -            | -            | -            | -            | -            | 15.46       | 4.75        |  |
|            | 14*1 14*1 14*1 - - -       | 4.80              | 4.80         | 4.80         | -            | -            | -            | -            | -            | 14.40       | 4.21        |  |
|            | 12 24 24 - - - - -         | 3.58              | 7.15         | 7.15         | -            | -            | -            | -            | -            | 17.89       | 5.98        |  |
|            | 12 18 24 - - - - -         | 3.84              | 5.68         | 7.67         | -            | -            | -            | -            | -            | 17.19       | 5.43        |  |
|            | 12 18 18 - - - - -         | 3.96              | 5.86         | 5.86         | -            | -            | -            | -            | -            | 15.68       | 5.07        |  |
|            | 12 14 24 - - - - -         | 3.94              | 4.78         | 7.87         | -            | -            | -            | -            | -            | 16.59       | 5.11        |  |
|            | 12 14 18 - - - - -         | 3.96              | 4.80         | 5.86         | -            | -            | -            | -            | -            | 14.62       | 4.46        |  |
|            | 12*1 14*1 14*1 - - -       | 3.96              | 4.80         | 4.80         | -            | -            | -            | -            | -            | 13.56       | 4.00        |  |
|            | 12 12 24 - - - - -         | 3.96              | 3.96         | 7.91         | -            | -            | -            | -            | -            | 15.83       | 5.07        |  |
|            | 12 12 18 - - - - -         | 3.96              | 3.96         | 5.86         | -            | -            | -            | -            | -            | 13.78       | 4.21        |  |
|            | 9 24 24 - - - - -          | 2.85              | 7.54         | 7.54         | -            | -            | -            | -            | -            | 17.93       | 5.87        |  |
|            | 9 18 24 - - - - -          | 2.97              | 5.83         | 7.87         | -            | -            | -            | -            | -            | 16.67       | 5.16        |  |
|            | 9 18 18 - - - - -          | 2.99              | 5.86         | 5.86         | -            | -            | -            | -            | -            | 14.71       | 4.60        |  |
|            | 9 14 24 - - - - -          | 2.99              | 4.80         | 7.91         | -            | -            | -            | -            | -            | 15.70       | 4.91        |  |
|            | 9 14 18 - - - - -          | 2.99              | 4.80         | 5.86         | -            | -            | -            | -            | -            | 13.65       | 4.10        |  |
|            | 9 12 24 - - - - -          | 2.99              | 3.96         | 7.91         | -            | -            | -            | -            | -            | 14.86       | 4.60        |  |
|            | 9 12 18 - - - - -          | 2.99              | 3.96         | 5.86         | -            | -            | -            | -            | -            | 12.81       | 3.90        |  |
|            | 9 9 24 - - - - -           | 2.99              | 2.99         | 7.91         | -            | -            | -            | -            | -            | 13.89       | 4.21        |  |
|            | 7 24 24 - - - - -          | 2.28              | 7.61         | 7.61         | -            | -            | -            | -            | -            | 17.51       | 5.56        |  |
|            | 7 18 24 - - - - -          | 2.37              | 5.85         | 7.90         | -            | -            | -            | -            | -            | 16.12       | 5.08        |  |
|            | 7 18 18 - - - - -          | 2.37              | 5.86         | 5.86         | -            | -            | -            | -            | -            | 14.09       | 4.33        |  |
|            | 7 14 24 - - - - -          | 2.37              | 4.80         | 7.91         | -            | -            | -            | -            | -            | 15.08       | 4.60        |  |
|            | 7 14 18 - - - - -          | 2.37              | 4.80         | 5.86         | -            | -            | -            | -            | -            | 13.03       | 3.90        |  |
|            | 7 12 24 - - - - -          | 2.37              | 3.96         | 7.91         | -            | -            | -            | -            | -            | 14.24       | 4.33        |  |
|            | 7 9 24 - - - - -           | 2.37              | 2.99         | 7.91         | -            | -            | -            | -            | -            | 13.27       | 4.00        |  |
|            | 14 14 14 18 - - -          | 4.30              | 4.30         | 5.24         | -            | -            | -            | -            | -            | 18.13       | 5.98        |  |
|            | 14 14 14 14 - - -          | 4.55              | 4.55         | 4.55         | -            | -            | -            | -            | -            | 18.20       | 5.70        |  |
|            | 12 14 18 18 - - -          | 3.53              | 4.28         | 5.22         | -            | -            | -            | -            | -            | 18.24       | 5.98        |  |
|            | 12 14 14 18 - - -          | 3.61              | 4.38         | 4.38         | 5.34         | -            | -            | -            | -            | 17.71       | 5.98        |  |
|            | 12 14 14 14 - - -          | 3.80              | 4.61         | 4.61         | 4.61         | -            | -            | -            | -            | 17.62       | 5.43        |  |
|            | 12 12 18 18 - - -          | 3.59              | 3.59         | 5.32         | 5.32         | -            | -            | -            | -            | 17.82       | 5.98        |  |
|            | 12 12 14 24 - - -          | 3.52              | 3.52         | 4.26         | 7.02         | -            | -            | -            | -            | 18.32       | 5.98        |  |
|            | 12 12 14 18 - - -          | 3.79              | 3.79         | 4.59         | 5.61         | -            | -            | -            | -            | 17.77       | 5.70        |  |
|            | 12 12 14 14 - - -          | 3.92              | 3.92         | 4.75         | 4.75         | -            | -            | -            | -            | 17.33       | 5.23        |  |
|            | 12 12 12 24 - - -          | 3.58              | 3.58         | 3.58         | 7.15         | -            | -            | -            | -            | 17.90       | 5.98        |  |
|            | 12 12 12 18 - - -          | 3.84              | 3.84         | 3.84         | 5.68         | -            | -            | -            | -            | 17.20       | 5.43        |  |
|            | 12 12 12 14 - - -          | 3.94              | 3.94         | 3.94         | 4.78         | -            | -            | -            | -            | 16.60       | 5.11        |  |
|            | 12 12 12 12 - - -          | 3.96              | 3.96         | 3.96         | 3.96         | -            | -            | -            | -            | 15.84       | 5.07        |  |
|            | 9 14 18 18 - - -           | 2.72              | 4.37         | 5.33         | 5.33         | -            | -            | -            | -            | 17.76       | 5.98        |  |
|            | 9 14 14 24 - - -           | 2.66              | 4.27         | 4.27         | 7.04         | -            | -            | -            | -            | 18.25       | 5.98        |  |
|            | 9 14 14 18 - - -           | 2.87              | 4.60         | 4.60         | 5.62         | -            | -            | -            | -            | 17.68       | 5.56        |  |
|            | 9 14 14 14 - - -           | 2.96              | 4.75         | 4.75         | 4.75         | -            | -            | -            | -            | 17.22       | 5.16        |  |
|            | 9 12 18 18 - - -           | 2.86              | 3.78         | 5.60         | 5.60         | -            | -            | -            | -            | 17.84       | 5.87        |  |
|            | 9 12 14 24 - - -           | 2.71              | 3.59         | 4.35         | 7.17         | -            | -            | -            | -            | 17.83       | 5.98        |  |
|            | 9 12 14 18 - - -           | 2.90              | 3.85         | 4.66         | 5.69         | -            | -            | -            | -            | 17.11       | 5.32        |  |
|            | 9 12 14 14 - - -           | 2.98              | 3.94         | 4.78         | 4.78         | -            | -            | -            | -            | 16.48       | 5.08        |  |
|            | 9 12 12 24 - - -           | 2.85              | 3.77         | 3.77         | 7.54         | -            | -            | -            | -            | 17.94       | 5.87        |  |
|            | 9 12 12 18 - - -           | 2.97              | 3.94         | 3.94         | 5.83         | -            | -            | -            | -            | 16.67       | 5.16        |  |
|            | 9 12 12 14 - - -           | 2.99              | 3.96         | 3.96         | 4.80         | -            | -            | -            | -            | 15.71       | 4.91        |  |
|            | 9 12 12 12 - - -           | 2.99              | 3.96         | 3.96         | 3.96         | -            | -            | -            | -            | 14.87       | 4.60        |  |
|            | 9 9 18 24 - - -            | 2.71              | 2.71         | 5.30         | 7.16         | -            | -            | -            | -            | 17.88       | 5.98        |  |
|            | 9 9 18 18 - - -            | 2.90              | 2.90         | 5.68         | 5.68         | -            | -            | -            | -            | 17.17       | 5.43        |  |
|            | 9 9 14 24 - - -            | 2.86              | 2.86         | 4.58         | 7.55         | -            | -            | -            | -            | 17.85       | 5.70        |  |
|            | 9 9 14 18 - - -            | 2.98              | 2.98         | 4.78         | 5.83         | -            | -            | -            | -            | 16.56       | 5.11        |  |
|            | 9 9 14 14 - - -            | 2.99              | 2.99         | 4.80         | 4.80         | -            | -            | -            | -            | 15.58       | 4.75        |  |
|            | 9 9 12 24 - - -            | 2.89              | 2.89         | 3.83         | 7.65         | -            | -            | -            | -            | 17.27       | 5.43        |  |
|            | 9 9 12 18 - - -            | 2.99              | 2.99         | 3.96         | 4.80         | -            | -            | -            | -            | 15.80       | 5.07        |  |
|            | 9 9 12 14 - - -            | 2.99              | 2.99         | 3.96         | 3.96         | -            | -            | -            | -            | 14.74       | 4.46        |  |
|            | 9 9 9 24 - - -             | 2.99              | 2.99         | 3.96         | 4.80         | -            | -            | -            | -            | 13.90       | 4.21        |  |
|            | 9 9 9 24 - - -             | 2.97              | 2.97         | 2.97         | 7.86         | -            | -            | -            | -            | 16.77       | 5.16        |  |
|            | 9 9 9 18 - - -             | 2.99              | 2.99         | 2.99         | 5.86         | -            | -            | -            | -            | 14.83       | 4.60        |  |
|            | 9 9 9 14 - - -             | 2.99              | 2.99         | 2.99         | 4.80         | -            | -            | -            | -            | 13.77       | 4.10        |  |
|            | 9 9 9 12 - - -             | 2.99              | 2.99         | 2.99         | 3.96         | -            | -            | -            | -            | 12.93       | 3.90        |  |
|            | 7 18 18 18 - - -           | 2.14              | 5.28         | 5.28         | 5.28         | -            | -            | -            | -            | 17.98       | 5.98        |  |
|            | 7 14 18 18 - - -           | 2.26              | 4.57         | 5.58         | 5.58         | -            | -            | -            | -            | 17.99       | 5.87        |  |
|            | 7 14 14 24 - - -           | 2.14              | 4.33         | 4.33         | 7.14         | -            | -            | -            | -            | 17.94       | 5.98        |  |
|            | 7 14 14 18 - - -           | 2.29              | 4.65         | 4.65         | 5.67         | -            | -            | -            | -            | 17.26       | 5.32        |  |
|            | 7 14 14 14 - - -           | 2.36              | 4.77         | 4.77         | 4.77         | -            | -            | -            | -            | 16.67       | 5.08        |  |
|            | 7 12 18 24 - - -           | 2.13              | 3.56         | 5.26         | 7.10         | -            | -            | -            | -            | 18.05       | 5.98        |  |
|            | 7 12 18 18 - - -           | 2.29              | 3.82         | 5.65         | 5.65         | -            | -            | -            | -            | 17.41       | 5.56        |  |
|            | 7 12 14 24 - - -           | 2.25              | 3.76         | 4.56         | 7.52         | -            | -            | -            | -            | 18.09       | 5.87        |  |
|            | 7 12 14 18 - - -           | 2.35              | 3.93         | 4.77         | 5.82         | -            | -            | -            | -            | 16.87       | 5.16        |  |
|            | 7 12 12 24 - - -           | 2.37              | 3.96         | 4.80         | 4.80         | -            | -            | -            | -            | 15.93       | 4.91        |  |
|            | 7 12 12 20 - - -           | 2.28              | 3.81         | 3.81         | 7.61         | -            | -            | -            | -            | 17.51       | 5.56        |  |
|            | 7 12 12 18 - - -           | 2.37              | 3.96         | 3.96         | 5.85         | -            | -            | -            | -            | 16.13       | 5.08        |  |
|            | 7 12 12 14 - - -           | 2.37              | 3.96         | 3.96         | 4.80         | -            | -            | -            | -            | 15.09       | 4.60        |  |
|            | 7 9 18 24 - - -            | 2.37              | 3.96         | 3.96         | 3.96         | -            | -            | -            | -            | 14.25       | 4.33        |  |
|            | 7 9 18 18 - - -            | 2.25              | 2.84         | 5.56         | 7.51         | -            | -            | -            | -            | 18.15       | 5.98        |  |
|            | 7 9 14 24 - - -            | 2.35              | 2.97         | 5.81         | 5.81         | -            | -            | -            | -            | 16.95       | 5.23        |  |
|            | 7 9 14 18 - - -            | 2.29              | 2.88         | 4.63         | 7.63         | -            | -            | -            | -            | 17.42       | 5.43        |  |
|            | 7 9 14 14 - - -            | 2.37              | 2.99         | 4.80         | 5.86         | -            | -            | -            | -            | 16.02       | 5.07        |  |
|            | 7 9 12 24 - - -            | 2.35              | 2.96         | 3.92         | 7.84         | -            | -            | -            | -            | 17.08       | 5.23        |  |
|            | 7 9 12 18 - - -            | 2.37              | 2.99         | 3.96         | 5.86         | -            | -            | -            | -            | 15.18       | 4.75        |  |
|            | 7 9 12 14 - - -            | 2.37              | 2.99         | 3.96         | 4.80         | -            | -            | -            | -            | 14.12       | 4.21        |  |
|            | 7 9 9 24                   |                   |              |              |              |              |              |              |              |             |             |  |



## PRODUCT LINEUP: MULTI SPLIT

# MULTI SPLIT Combination Table for 8 Rooms-Heating

### 8 Rooms Multi heating

| AOYG45LTB8 | Combination of Indoor Unit | HEATING OPERATION |              |              |              |              |              |              |              |             |      | Input power |  |
|------------|----------------------------|-------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|------|-------------|--|
|            |                            | Heating Capacity  |              |              |              |              |              |              |              |             |      |             |  |
|            |                            | Room 1<br>kW      | Room 2<br>kW | Room 3<br>kW | Room 4<br>kW | Room 5<br>kW | Room 6<br>kW | Room 7<br>kW | Room 8<br>kW | Total<br>kW | kW   |             |  |
| 4 Room     | 7 7 14 18 - - - -          | 2.37              | 2.37         | 4.80         | 5.86         | -            | -            | -            | -            | 15.40       | 4.75 |             |  |
|            | 7 7 14 14 - - - -          | 2.37              | 2.37         | 4.80         | 4.80         | -            | -            | -            | -            | 14.34       | 4.21 |             |  |
|            | 7 7 12 24 - - - -          | 2.36              | 2.36         | 3.94         | 7.87         | -            | -            | -            | -            | 16.53       | 5.11 |             |  |
|            | 7 7 12 18 - - - -          | 2.37              | 2.37         | 3.96         | 5.86         | -            | -            | -            | -            | 14.56       | 4.46 |             |  |
|            | 7 7 12 14 - - - -          | 2.37              | 2.37         | 3.96         | 4.80         | -            | -            | -            | -            | 13.50       | 4.00 |             |  |
|            | 7 7 9 24 - - - -           | 2.37              | 2.37         | 2.99         | 7.91         | -            | -            | -            | -            | 15.64       | 4.91 |             |  |
|            | 7 7 9 18 - - - -           | 2.37              | 2.37         | 2.99         | 5.86         | -            | -            | -            | -            | 13.59       | 4.10 |             |  |
|            | 7 7 7 24 - - - -           | 2.37              | 2.37         | 2.37         | 7.91         | -            | -            | -            | -            | 15.02       | 4.60 |             |  |
|            | 7 7 7 18 - - - -           | 2.37              | 2.37         | 2.37         | 5.86         | -            | -            | -            | -            | 12.97       | 3.90 |             |  |
|            | 12 12 12 12 14 - -         | 3.51              | 3.51         | 3.51         | 4.26         | -            | -            | -            | -            | 18.32       | 5.98 |             |  |
| 5 Room     | 12 12 12 12 12 - -         | 3.58              | 3.58         | 3.58         | 3.58         | -            | -            | -            | -            | 17.90       | 5.98 |             |  |
|            | 9 12 12 12 14 - -          | 2.66              | 3.52         | 3.52         | 4.27         | -            | -            | -            | -            | 18.26       | 5.98 |             |  |
|            | 9 12 12 12 12 - -          | 2.71              | 3.59         | 3.59         | 4.35         | -            | -            | -            | -            | 17.84       | 5.98 |             |  |
|            | 9 12 12 12 14 - -          | 2.85              | 3.77         | 3.77         | 3.77         | -            | -            | -            | -            | 17.95       | 5.87 |             |  |
|            | 9 9 14 14 14 - -           | 2.67              | 2.67         | 4.28         | 4.28         | -            | -            | -            | -            | 18.19       | 5.98 |             |  |
|            | 9 9 12 14 18 - -           | 2.66              | 2.66         | 3.52         | 4.26         | 5.21         | -            | -            | -            | 18.30       | 5.98 |             |  |
|            | 9 9 12 14 14 - -           | 2.72              | 2.72         | 3.60         | 4.37         | -            | -            | -            | -            | 17.77       | 5.98 |             |  |
|            | 9 9 12 12 18 - -           | 2.71              | 2.71         | 3.58         | 5.30         | -            | -            | -            | -            | 17.88       | 5.98 |             |  |
|            | 9 9 12 12 14 - -           | 2.86              | 2.86         | 3.78         | 4.58         | -            | -            | -            | -            | 17.86       | 5.70 |             |  |
|            | 9 9 12 12 12 - -           | 2.89              | 2.89         | 3.83         | 3.83         | -            | -            | -            | -            | 17.28       | 5.43 |             |  |
| 6 Room     | 9 9 9 14 18 - -            | 2.71              | 2.71         | 4.36         | 5.32         | -            | -            | -            | -            | 17.82       | 5.98 |             |  |
|            | 9 9 9 14 14 - -            | 2.86              | 2.86         | 4.59         | 4.59         | -            | -            | -            | -            | 17.77       | 5.56 |             |  |
|            | 9 9 9 12 18 - -            | 2.85              | 2.85         | 3.78         | 5.59         | -            | -            | -            | -            | 17.92       | 5.87 |             |  |
|            | 9 9 9 12 14 - -            | 2.90              | 2.90         | 3.84         | 4.65         | -            | -            | -            | -            | 17.19       | 5.32 |             |  |
|            | 9 9 9 12 12 - -            | 2.97              | 2.97         | 3.93         | 3.93         | -            | -            | -            | -            | 16.78       | 5.16 |             |  |
|            | 9 9 9 9 24 - -             | 2.70              | 2.70         | 2.70         | 7.14         | -            | -            | -            | -            | 17.94       | 5.98 |             |  |
|            | 9 9 9 9 18 - -             | 2.89              | 2.89         | 2.89         | 5.67         | -            | -            | -            | -            | 17.25       | 5.43 |             |  |
|            | 9 9 9 9 14 - -             | 2.97              | 2.97         | 2.97         | 4.77         | -            | -            | -            | -            | 16.67       | 5.11 |             |  |
|            | 9 9 9 9 12 - -             | 2.99              | 2.99         | 2.99         | 3.96         | -            | -            | -            | -            | 15.92       | 5.07 |             |  |
|            | 9 12 14 14 14 - -          | 2.10              | 3.51         | 4.25         | 4.25         | -            | -            | -            | -            | 18.37       | 5.98 |             |  |
| 7 Room     | 7 12 12 12 14 - -          | 2.14              | 3.57         | 4.33         | 4.33         | -            | -            | -            | -            | 17.95       | 5.98 |             |  |
|            | 7 12 12 12 18 - -          | 2.13              | 3.56         | 3.56         | 5.26         | -            | -            | -            | -            | 18.06       | 5.98 |             |  |
|            | 7 12 12 12 14 - -          | 2.25              | 3.76         | 3.76         | 4.56         | -            | -            | -            | -            | 18.10       | 5.87 |             |  |
|            | 7 12 12 12 12 - -          | 2.28              | 3.81         | 3.81         | 3.81         | -            | -            | -            | -            | 17.52       | 5.56 |             |  |
|            | 7 9 14 14 18 - -           | 2.09              | 2.64         | 4.24         | 5.18         | -            | -            | -            | -            | 18.40       | 5.98 |             |  |
|            | 7 9 14 14 14 - -           | 2.14              | 2.71         | 4.34         | 4.34         | -            | -            | -            | -            | 17.88       | 5.98 |             |  |
|            | 7 9 12 14 18 - -           | 2.13              | 2.69         | 3.57         | 4.32         | 5.28         | -            | -            | -            | 17.99       | 5.98 |             |  |
|            | 7 9 12 14 14 - -           | 2.26              | 2.85         | 3.77         | 4.57         | 4.57         | -            | -            | -            | 18.01       | 5.70 |             |  |
|            | 7 9 12 12 18 - -           | 2.25              | 2.84         | 3.76         | 3.76         | -            | -            | -            | -            | 18.16       | 5.98 |             |  |
|            | 7 9 12 12 14 - -           | 2.28              | 2.88         | 3.82         | 4.63         | -            | -            | -            | -            | 17.43       | 5.43 |             |  |
| 8 Room     | 7 9 12 12 12 - -           | 2.35              | 2.96         | 3.92         | 3.92         | -            | -            | -            | -            | 17.09       | 5.23 |             |  |
|            | 7 9 9 18 18 - -            | 2.13              | 2.89         | 2.69         | 5.27         | -            | -            | -            | -            | 18.04       | 5.98 |             |  |
|            | 7 9 9 14 18 - -            | 2.25              | 2.84         | 2.84         | 4.56         | 5.57         | -            | -            | -            | 18.07       | 5.87 |             |  |
|            | 7 9 9 14 14 - -            | 2.29              | 2.89         | 2.89         | 4.64         | 4.64         | -            | -            | -            | 17.34       | 5.32 |             |  |
|            | 7 9 9 12 24 - -            | 2.12              | 2.68         | 2.68         | 3.55         | 7.08         | -            | -            | -            | 18.11       | 5.98 |             |  |
|            | 7 9 9 12 18 - -            | 2.28              | 2.88         | 2.88         | 3.81         | 5.64         | -            | -            | -            | 17.49       | 5.56 |             |  |
|            | 7 9 9 12 14 - -            | 2.35              | 2.97         | 2.97         | 3.93         | 4.76         | -            | -            | -            | 16.97       | 5.16 |             |  |
|            | 7 9 9 12 12 - -            | 2.37              | 2.98         | 2.98         | 3.95         | -            | -            | -            | -            | 16.24       | 5.08 |             |  |
|            | 7 9 9 9 24 - -             | 2.17              | 2.74         | 2.74         | 7.24         | -            | -            | -            | -            | 17.63       | 5.98 |             |  |
|            | 7 9 9 9 18 - -             | 2.35              | 2.96         | 2.96         | 5.81         | -            | -            | -            | -            | 17.05       | 5.23 |             |  |
| 9 Room     | 7 9 9 9 14 - -             | 2.37              | 2.99         | 2.99         | 4.79         | -            | -            | -            | -            | 16.12       | 5.07 |             |  |
|            | 7 9 9 9 12 - -             | 2.37              | 2.99         | 2.99         | 3.96         | -            | -            | -            | -            | 15.30       | 4.75 |             |  |
|            | 7 9 9 9 9 - -              | 2.37              | 2.99         | 2.99         | 2.99         | -            | -            | -            | -            | 14.33       | 4.33 |             |  |
|            | 7 7 14 14 18 - -           | 2.12              | 2.12         | 4.30         | 4.30         | -            | -            | -            | -            | 18.10       | 5.98 |             |  |
|            | 7 7 14 14 14 - -           | 2.25              | 2.25         | 4.55         | 4.55         | -            | -            | -            | -            | 18.16       | 5.70 |             |  |
|            | 7 7 12 18 18 - -           | 2.11              | 3.53         | 5.23         | 5.23         | -            | -            | -            | -            | 18.21       | 5.98 |             |  |
|            | 7 7 12 14 18 - -           | 2.16              | 3.62         | 4.38         | 5.35         | -            | -            | -            | -            | 17.68       | 5.98 |             |  |
|            | 7 7 12 14 14 - -           | 2.28              | 2.28         | 3.80         | 4.61         | -            | -            | -            | -            | 17.58       | 5.43 |             |  |
|            | 7 7 12 12 24 - -           | 2.11              | 2.11         | 3.52         | 3.52         | 7.03         | -            | -            | -            | 18.29       | 5.98 |             |  |
|            | 7 7 12 12 12 - -           | 2.35              | 2.35         | 3.92         | 3.92         | 4.75         | -            | -            | -            | 17.28       | 5.23 |             |  |
| 10 Room    | 7 7 12 12 12 - -           | 2.36              | 2.36         | 3.94         | 3.94         | -            | -            | -            | -            | 16.54       | 5.11 |             |  |
|            | 7 7 9 14 24 - -            | 2.16              | 2.16         | 2.72         | 5.34         | 5.34         | -            | -            | -            | 17.73       | 5.98 |             |  |
|            | 7 7 9 14 18 - -            | 2.21              | 2.11         | 2.11         | 4.28         | 7.05         | -            | -            | -            | 18.22       | 5.98 |             |  |
|            | 7 7 9 14 14 - -            | 2.27              | 2.27         | 2.87         | 4.61         | 5.62         | -            | -            | -            | 17.64       | 5.56 |             |  |
|            | 7 7 9 14 10 - -            | 2.35              | 2.35         | 2.96         | 4.75         | 4.75         | -            | -            | -            | 17.16       | 5.16 |             |  |
|            | 7 7 9 12 24 - -            | 2.15              | 2.15         | 2.72         | 3.60         | 7.18         | -            | -            | -            | 17.80       | 5.98 |             |  |
|            | 7 7 9 12 18 - -            | 2.34              | 2.34         | 2.96         | 3.92         | 5.80         | -            | -            | -            | 17.36       | 5.32 |             |  |
|            | 7 7 9 12 14 - -            | 2.36              | 2.36         | 2.98         | 3.95         | 4.78         | -            | -            | -            | 16.43       | 5.08 |             |  |
|            | 7 7 9 12 12 - -            | 2.37              | 2.37         | 2.99         | 3.96         | 3.96         | -            | -            | -            | 15.65       | 4.91 |             |  |
|            | 7 7 9 9 24 - -             | 2.27              | 2.27         | 2.86         | 2.86         | 7.56         | -            | -            | -            | 17.81       | 5.70 |             |  |
| 11 Room    | 7 7 9 9 18 - -             | 2.36              | 2.36         | 2.98         | 5.83         | -            | -            | -            | -            | 16.51       | 5.11 |             |  |
|            | 7 7 9 9 14 - -             | 2.37              | 2.37         | 2.99         | 2.99         | -            | -            | -            | -            | 15.52       | 4.75 |             |  |
|            | 7 7 9 9 12 - -             | 2.37              | 2.37         | 2.99         | 3.96         | -            | -            | -            | -            | 14.68       | 4.46 |             |  |
|            | 7 7 9 9 9 - -              | 2.37              | 2.37         | 2.99         | 2.99         | -            | -            | -            | -            | 13.71       | 4.10 |             |  |
|            | 7 7 7 18 18 - -            | 2.26              | 2.26         | 2.26         | 5.58         | 5.58         | -            | -            | -            | 17.95       | 5.87 |             |  |
|            | 7 7 7 14 24 - -            | 2.14              | 2.14         | 4.34         | 4.34         | -            | -            | -            | -            | 17.91       | 5.98 |             |  |
|            | 7 7 7 14 18 - -            | 2.30              | 2.30         | 2.30         | 4.65         | 5.68         | -            | -            | -            | 17.22       | 5.32 |             |  |
|            | 7 7 7 14 14 - -            | 2.36              | 2.36         | 4.77         | 4.77         | -            | -            | -            | -            | 16.62       | 5.08 |             |  |
|            | 7 7 7 12 24 - -            | 2.25              | 2.25         | 3.77         | 7.52         | -            | -            | -            | -            | 18.05       | 5.87 |             |  |
|            | 7 7 7 12 18 - -            | 2.35              | 2.35         | 3.93         | 5.82         | -            | -            | -            | -            | 16.81       | 5.16 |             |  |
| 12 Room    | 7 7 7 12 14 - -            | 2.37              | 2.37         | 3.96         | 4.80         | -            | -            | -            | -            | 15.87       | 4.91 |             |  |
|            | 7 7 7 12 12 - -            | 2.37              | 2.37         | 3.27         | 3.27         | 5.86         | -            | -            | -            | 15.03       | 4.60 |             |  |
|            |                            |                   |              |              |              |              |              |              |              |             |      |             |  |

## 8 Rooms Multi heating

| AOYG45LTB8 | Combination of Indoor Unit | HEATING OPERATION |              |              |              |              |              |              |              |             | Input power<br>kW |  |
|------------|----------------------------|-------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|-------------------|--|
|            |                            | Heating Capacity  |              |              |              |              |              |              |              |             |                   |  |
|            |                            | Room 1<br>kW      | Room 2<br>kW | Room 3<br>kW | Room 4<br>kW | Room 5<br>kW | Room 6<br>kW | Room 7<br>kW | Room 8<br>kW | Total<br>kW |                   |  |
|            | 7 9 9 9 9 9 18 - -         | 2.12              | 2.68         | 2.68         | 2.68         | 2.68         | 5.25         | -            | -            | 18.10       | 5.98              |  |
|            | 7 9 9 9 9 9 12 - -         | 2.28              | 2.87         | 2.87         | 2.87         | 3.81         | -            | -            | -            | 17.57       | 5.56              |  |
|            | 7 9 9 9 9 9 9 - -          | 2.35              | 2.96         | 2.96         | 2.96         | 2.96         | -            | -            | -            | 17.16       | 5.23              |  |
|            | 7 7 12 12 12 12 - -        | 2.11              | 2.11         | 3.52         | 3.52         | 3.52         | -            | -            | -            | 18.29       | 5.98              |  |
|            | 7 7 9 12 12 14 - -         | 2.11              | 2.11         | 2.66         | 3.53         | 4.28         | -            | -            | -            | 18.23       | 5.98              |  |
|            | 7 7 9 12 12 12 - -         | 2.15              | 2.15         | 2.71         | 3.60         | 3.60         | -            | -            | -            | 17.81       | 5.98              |  |
|            | 7 7 9 9 14 14 - -          | 2.12              | 2.12         | 2.67         | 2.67         | 4.29         | 4.29         | -            | -            | 18.16       | 5.98              |  |
|            | 7 7 9 9 12 18 - -          | 2.11              | 2.11         | 2.66         | 2.66         | 3.52         | 5.21         | -            | -            | 18.27       | 5.98              |  |
|            | 7 7 9 9 12 14 - -          | 2.16              | 2.16         | 2.72         | 2.72         | 3.61         | 4.37         | -            | -            | 17.74       | 5.98              |  |
|            | 7 7 9 9 12 12 - -          | 2.27              | 2.27         | 2.86         | 2.86         | 3.78         | -            | -            | -            | 17.82       | 5.70              |  |
|            | 7 7 9 9 18 - -             | 2.15              | 2.15         | 2.72         | 2.72         | 2.72         | 5.33         | -            | -            | 17.79       | 5.98              |  |
|            | 7 7 9 9 14 - -             | 2.27              | 2.27         | 2.86         | 2.86         | 4.60         | -            | -            | -            | 17.73       | 5.56              |  |
|            | 7 7 9 9 12 - -             | 2.30              | 2.30         | 2.90         | 2.90         | 3.84         | -            | -            | -            | 17.15       | 5.32              |  |
|            | 7 7 9 9 9 - -              | 2.36              | 2.36         | 2.97         | 2.97         | 2.97         | -            | -            | -            | 16.61       | 5.11              |  |
|            | 7 7 7 12 14 - -            | 2.10              | 2.10         | 2.10         | 3.51         | 4.26         | 4.26         | -            | -            | 18.34       | 5.98              |  |
|            | 7 7 7 12 12 - -            | 2.14              | 2.14         | 2.14         | 3.58         | 3.58         | 4.34         | -            | -            | 17.92       | 5.98              |  |
|            | 7 7 7 12 12 - -            | 2.25              | 2.25         | 2.25         | 3.77         | 3.77         | 3.77         | -            | -            | 18.06       | 5.87              |  |
|            | 7 7 7 9 14 - -             | 2.10              | 2.10         | 2.10         | 2.65         | 4.25         | 5.19         | -            | -            | 18.38       | 5.98              |  |
|            | 7 7 7 9 14 - -             | 2.15              | 2.15         | 2.71         | 4.35         | 4.35         | -            | -            | -            | 17.85       | 5.98              |  |
| 6 Room     | 7 7 7 9 12 - -             | 2.14              | 2.14         | 2.70         | 3.57         | 5.28         | -            | -            | -            | 17.96       | 5.98              |  |
|            | 7 7 7 9 12 - -             | 2.26              | 2.26         | 2.85         | 3.77         | 4.57         | -            | -            | -            | 17.97       | 5.70              |  |
|            | 7 7 7 9 12 - -             | 2.29              | 2.29         | 2.89         | 3.82         | 3.82         | -            | -            | -            | 17.39       | 5.43              |  |
|            | 7 7 7 9 18 - -             | 2.25              | 2.25         | 2.84         | 2.84         | 5.57         | -            | -            | -            | 18.03       | 5.87              |  |
|            | 7 7 7 9 14 - -             | 2.29              | 2.29         | 2.89         | 2.89         | 4.64         | -            | -            | -            | 17.30       | 5.32              |  |
|            | 7 7 7 9 12 - -             | 2.35              | 2.35         | 2.97         | 2.97         | 3.93         | -            | -            | -            | 16.92       | 5.16              |  |
|            | 7 7 7 9 9 - -              | 2.37              | 2.37         | 2.37         | 2.99         | 2.99         | 2.99         | -            | -            | 16.07       | 5.07              |  |
|            | 7 7 7 7 14 - -             | 2.13              | 2.13         | 2.13         | 4.31         | 5.26         | -            | -            | -            | 18.07       | 5.98              |  |
|            | 7 7 7 7 14 - -             | 2.25              | 2.25         | 2.25         | 4.56         | 4.56         | -            | -            | -            | 18.12       | 5.70              |  |
|            | 7 7 7 7 12 - -             | 2.17              | 2.17         | 2.17         | 3.62         | 5.36         | -            | -            | -            | 17.65       | 5.98              |  |
|            | 7 7 7 7 12 - -             | 2.28              | 2.28         | 2.28         | 3.81         | 4.62         | -            | -            | -            | 17.54       | 5.43              |  |
|            | 7 7 7 7 12 - -             | 2.35              | 2.35         | 2.35         | 3.92         | 3.92         | -            | -            | -            | 17.23       | 5.23              |  |
|            | 7 7 7 7 9 24 - -           | 2.12              | 2.12         | 2.12         | 2.67         | 7.06         | -            | -            | -            | 18.19       | 5.98              |  |
|            | 7 7 7 7 9 18 - -           | 2.28              | 2.28         | 2.28         | 2.87         | 5.63         | -            | -            | -            | 17.60       | 5.56              |  |
|            | 7 7 7 7 9 14 - -           | 2.35              | 2.35         | 2.35         | 4.76         | -            | -            | -            | -            | 17.11       | 5.16              |  |
|            | 7 7 7 7 9 12 - -           | 2.36              | 2.36         | 2.36         | 2.98         | 3.95         | -            | -            | -            | 16.38       | 5.08              |  |
|            | 7 7 7 7 9 9 - -            | 2.37              | 2.37         | 2.37         | 2.99         | -            | -            | -            | -            | 15.46       | 4.75              |  |
|            | 7 7 7 7 7 24 - -           | 2.14              | 2.14         | 2.14         | 2.14         | 7.16         | -            | -            | -            | 17.88       | 5.98              |  |
|            | 7 7 7 7 7 18 - -           | 2.30              | 2.30         | 2.30         | 2.30         | 5.68         | -            | -            | -            | 17.18       | 5.32              |  |
|            | 7 7 7 7 7 14 - -           | 2.36              | 2.36         | 2.36         | 2.36         | 4.78         | -            | -            | -            | 16.57       | 5.08              |  |
|            | 7 7 7 7 7 12 - -           | 2.37              | 2.37         | 2.37         | 2.37         | 3.96         | -            | -            | -            | 15.81       | 4.91              |  |
|            | 7 7 7 7 7 9 - -            | 2.37              | 2.37         | 2.37         | 2.37         | 2.99         | -            | -            | -            | 14.84       | 4.46              |  |
| 7 Room     | 7 7 7 7 7 7 - -            | 2.37              | 2.37         | 2.37         | 2.37         | 2.37         | -            | -            | -            | 14.22       | 4.21              |  |
|            | 7 9 9 9 9 9 - -            | 2.12              | 2.67         | 2.67         | 2.67         | 2.67         | -            | -            | -            | 18.16       | 5.98              |  |
|            | 7 9 9 9 9 12 - -           | 2.10              | 2.10         | 2.65         | 2.65         | 2.65         | 3.51         | -            | -            | 18.33       | 5.98              |  |
|            | 7 9 9 9 9 9 - -            | 2.15              | 2.15         | 2.71         | 2.71         | 2.71         | -            | -            | -            | 17.85       | 5.98              |  |
|            | 7 7 9 9 9 14 - -           | 2.09              | 2.09         | 2.09         | 2.63         | 2.63         | 4.23         | -            | -            | 18.40       | 5.98              |  |
|            | 7 7 7 9 9 12 - -           | 2.13              | 2.13         | 2.69         | 2.69         | 2.69         | 3.56         | -            | -            | 18.02       | 5.98              |  |
|            | 7 7 7 9 9 9 - -            | 2.25              | 2.25         | 2.25         | 2.84         | 2.84         | 2.84         | -            | -            | 18.11       | 5.87              |  |
|            | 7 7 7 7 9 12 - -           | 2.11              | 2.11         | 2.11         | 2.67         | 3.53         | 3.53         | -            | -            | 18.20       | 5.98              |  |
|            | 7 7 7 7 9 14 - -           | 2.12              | 2.12         | 2.12         | 2.68         | 4.30         | -            | -            | -            | 18.13       | 5.98              |  |
|            | 7 7 7 7 9 12 - -           | 2.16              | 2.16         | 2.16         | 2.73         | 2.73         | 3.61         | -            | -            | 17.71       | 5.98              |  |
|            | 7 7 7 7 9 9 - -            | 2.27              | 2.27         | 2.27         | 2.87         | 2.87         | 2.87         | -            | -            | 17.68       | 5.56              |  |
|            | 7 7 7 7 7 12 - -           | 2.10              | 2.10         | 2.10         | 2.10         | 2.10         | 3.52         | 4.26         | -            | 18.31       | 5.98              |  |
|            | 7 7 7 7 7 12 - -           | 2.14              | 2.14         | 2.14         | 2.14         | 2.14         | 3.58         | 3.58         | -            | 17.89       | 5.98              |  |
|            | 7 7 7 7 7 9 18 - -         | 2.10              | 2.10         | 2.10         | 2.10         | 2.10         | 2.65         | 5.19         | -            | 18.35       | 5.98              |  |
|            | 7 7 7 7 7 9 14 - -         | 2.15              | 2.15         | 2.15         | 2.15         | 2.15         | 2.71         | 4.36         | -            | 17.82       | 5.98              |  |
|            | 7 7 7 7 7 9 12 - -         | 2.26              | 2.26         | 2.26         | 2.26         | 2.26         | 3.78         | -            | -            | 17.93       | 5.70              |  |
|            | 7 7 7 7 7 9 9 - -          | 2.29              | 2.29         | 2.29         | 2.29         | 2.29         | 2.89         | 2.89         | -            | 17.26       | 5.32              |  |
|            | 7 7 7 7 7 7 18 - -         | 2.13              | 2.13         | 2.13         | 2.13         | 2.13         | 5.26         | -            | -            | 18.04       | 5.98              |  |
|            | 7 7 7 7 7 7 14 - -         | 2.25              | 2.25         | 2.25         | 2.25         | 2.25         | 4.56         | -            | -            | 18.08       | 5.70              |  |
|            | 7 7 7 7 7 7 12 - -         | 2.28              | 2.28         | 2.28         | 2.28         | 2.28         | 3.81         | -            | -            | 17.50       | 5.43              |  |
|            | 7 7 7 7 7 7 9 - -          | 2.35              | 2.35         | 2.35         | 2.35         | 2.35         | 2.96         | -            | -            | 17.06       | 5.16              |  |
|            | 7 7 7 7 7 7 7 - -          | 2.36              | 2.36         | 2.36         | 2.36         | 2.36         | 2.36         | 2.36         | -            | 16.52       | 5.08              |  |
| 8 Room     | 7 7 7 7 7 7 9 - -          | 2.09              | 2.09         | 2.09         | 2.09         | 2.09         | 2.64         | 2.64         | 2.64         | 18.40       | 5.98              |  |
|            | 7 7 7 7 7 7 7 12 - -       | 2.11              | 2.11         | 2.11         | 2.11         | 2.11         | 2.68         | 2.68         | 2.68         | 18.10       | 5.98              |  |
|            | 7 7 7 7 7 7 7 9 - -        | 2.15              | 2.15         | 2.15         | 2.15         | 2.15         | 2.52         | 2.52         | 2.52         | 18.28       | 5.98              |  |
|            | 7 7 7 7 7 7 7 7 - -        | 2.25              | 2.25         | 2.25         | 2.25         | 2.25         | 2.25         | 2.25         | 2.25         | 18.04       | 5.70              |  |

Note: • Heating capacity is based on 20°CDB (indoor temperature), 7°CDB/6°CWB (outdoor temperature)

• Pipe Length: 5 m (Outdoor unit to Branch box), 3 m (Branch box to Indoor unit)

• Height difference: 0 m (Outdoor unit to Indoor unit)


• The values in this table should be used only as a guide. These values are calculated at standard conditions.

To fix your selection of models, select them according to "Model Selection" in the D&amp;T manual.

## PRODUCT LINEUP: SPLIT & MULTI SPLIT

### Feature Summary


| Type                   | Wall Mounted                          |                       |                       |                 |                 |                       |                       |                              |                 |                    |
|------------------------|---------------------------------------|-----------------------|-----------------------|-----------------|-----------------|-----------------------|-----------------------|------------------------------|-----------------|--------------------|
| Series                 | Flagship Range                        | Designer Range        | Standard Range        | ECO Range       | Designer Range  |                       | Standard Range        |                              |                 | ECO Range          |
|                        |                                       |                       |                       |                 |                 |                       |                       |                              |                 |                    |
| Model No.              | ASYG 09/12 KXCA                       | ASYG 07/09/12/14 KGTA | ASYG 07/09/12/14 KMTA | ASYG 18/24 KLCA | ASYG 09/12 LTCB | ASYG 07/09/12/14 LUCA | ASYG 07/09/12/14 LMCE | ASYG 18/30 LFCA, ASYG24 LFCC | ASYG 30/36 LMTA | ASYG 07/09/12 LLCE |
|                        |                                       |                       |                       |                 |                 |                       |                       |                              |                 |                    |
| Energy Saving Function | Dual side fans                        | ●                     |                       |                 |                 |                       |                       |                              |                 |                    |
|                        | Save human sensor                     | ●                     | ●                     |                 |                 | ●                     |                       |                              |                 | ●                  |
|                        | Save & Stop human sensor              |                       |                       |                 |                 |                       |                       |                              |                 |                    |
|                        | Economy mode                          | ●                     | ●                     | ●               | ●               | ●                     | ●                     | ●                            | ●               | ●                  |
|                        | Room temperature set point limitation |                       | ○                     | ○               |                 | ○                     | ○                     | ○                            | ○               | ○                  |
|                        | Set temperature auto return           |                       | ○                     | ○               |                 | ○                     | ○                     | ○                            | ○               | ○                  |
| Confortable Function   | Powerful heating                      |                       |                       |                 |                 | ●                     |                       |                              |                 |                    |
|                        | Power diffuser                        | ●                     |                       |                 |                 |                       |                       | ●                            | ●               |                    |
|                        | Server room operation                 |                       |                       |                 |                 |                       |                       |                              |                 | ●                  |
|                        | Powerful mode                         | ●                     | ●                     | ●               | ●               | ●                     | ●                     | ●                            | ●               | ●                  |
|                        | 10°C HEAT operation                   | ●                     | ●                     | ●               |                 | ●                     | ●                     | ●                            | ●               | ●                  |
|                        | Low noise mode                        | ●                     | ●                     | ●               |                 | ●                     | ●                     | ●                            | ●               | ●                  |
|                        | Auto-changeover                       | ●                     | ●                     | ●               | ●               | ●                     | ●                     | ●                            | ●               | ●                  |
|                        | Up/down swing flaps                   |                       | ●                     | ●               | ●               | ●                     | ●                     | ●                            |                 | ●                  |
|                        | Double swing automatic                | ●                     |                       |                 |                 |                       |                       |                              | ●               | ●                  |
|                        | Automatic fan speed                   | ●                     | ●                     | ●               | ●               | ●                     | ●                     | ●                            | ●               | ●                  |
|                        | Auto restart                          | ●                     | ●                     | ●               | ●               | ●                     | ●                     | ●                            | ●               | ●                  |
|                        | Connectable fresh air duct            |                       |                       |                 |                 |                       |                       |                              |                 |                    |
|                        | Fresh air intake                      |                       |                       |                 |                 |                       |                       |                              |                 |                    |
|                        | Connectable distributing duct         |                       |                       |                 |                 |                       |                       |                              |                 |                    |
|                        | Individual airflow direction control  |                       |                       |                 |                 |                       |                       |                              |                 |                    |
| Convenient Function    | Auto off timer                        |                       | ○                     | ○               |                 | ○                     | ○                     | ○                            | ○               | ○                  |
|                        | Sleep timer                           | ●                     | ●                     | ●               | ●               | ●                     | ●                     | ●                            | ●               | ●                  |
|                        | Program timer                         | ●                     | ●                     | ●               | ●               | ●                     | ●                     | ●                            | ●               | ●                  |
|                        | Weekly timer                          |                       | ●                     | ○               |                 | ●                     | ●                     |                              |                 | ●                  |
|                        | Weekly + setback timer                | ○                     | ○                     |                 |                 | ○                     | ○                     | ○                            | ○               | ○                  |
|                        | Filter sign                           | ●                     | ●                     | ●               | ●               | ●                     | ●                     | ●                            | ●               | ●                  |
|                        | External error output                 | ○                     | ○                     |                 |                 | ○                     | ○                     | ○                            | ○               | ○                  |
|                        | External ON/OFF input                 | ○                     | ○                     |                 |                 | ○                     | ○                     | ○                            | ○               | ○                  |
| Clean Function         | Wireless LAN control                  | ●                     | ○                     | ○               |                 | ○                     | ○                     | ○                            | ○               | ○                  |
|                        | Plasma air clean                      | ●                     |                       |                 |                 |                       |                       |                              |                 |                    |
|                        | Filter auto clean                     | ●                     |                       |                 |                 |                       |                       |                              |                 |                    |
|                        | Ion deodorization filter              |                       | ○                     | ○               |                 | ●                     | ●                     | ●                            | ●               | ●                  |
|                        | Apple-catechin filter                 |                       | ○                     | ○               |                 | ●                     | ●                     | ●                            | ●               | ●                  |
| Installation           | Long life filter                      |                       |                       |                 |                 |                       |                       |                              |                 |                    |
|                        | Washable panel                        |                       |                       |                 | ●               |                       |                       | ●                            |                 | ●                  |
|                        | Automatic airflow adjustment          |                       |                       |                 |                 |                       |                       |                              |                 |                    |
| Blue fin               | Drain pump as standard                |                       |                       |                 |                 |                       |                       |                              |                 |                    |
|                        | Blue fin                              |                       |                       |                 |                 |                       |                       | (30)                         |                 | ●                  |



SPLIT

MULTI SPLIT


O: Optional function

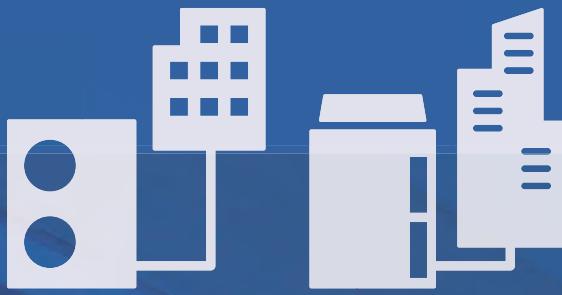

PRODUCT LINEUP

# VRF

For LIGHT COMMERCIAL  
& RESIDENTIAL,  
COMMERCIAL



AIRSTAGE™ VRF Systems can be designed to create an air conditioning solution to suit most buildings requirements.

AIRSTAGE™ VRF Systems can be designed to effectively provide an air conditioning solution from a large domestic residence through to a large scale commercial building.

# AIRSTAGE™

VRF

- 138 AIRSTAGE™ J-Series OVERVIEW
- 140 AIRSTAGE™ V-Series OVERVIEW
- 142 VRF Outdoor Units Lineup
- 144 CORE TECHNOLOGY



## AIRSTAGE™ J-Series

- 150 AIRSTAGE™ J-III
- 154 AIRSTAGE™ J-III
- 156 AIRSTAGE™ J-II



## AIRSTAGE™ V-Series

- 158 AIRSTAGE™ VR-II
- 162 AIRSTAGE™ V-III
- 166 AIRSTAGE™ V-III Tropical



## VRF INDOOR UNITS

- 170 VRF Indoor Units Lineup
- 172 NEW INDOOR UNITS
  - Compact Cassette Grid Type
  - Wall Mounted
- 174 VRF Indoor Units Specifications



## VENTILATION

- 180 VENTILATION Lineup
- 182 Energy Recovery Ventilator
- 184 DX-Kit for Air Handling Application




FUJITSU GENERAL (Euro) GmbH participates in the ECP programme for AIR CONDITIONERS.

Check ongoing validity of certificate:

[www.eurovent-certification.com](http://www.eurovent-certification.com)

\* Models so marked are not ECC certified.



## PRODUCT LINEUP: VRF

# AIRSTAGE™ J-Series OVERVIEW

Fujitsu General provides air conditioning systems for a wide range of applications from small office buildings and hotels to large stores, houses.



## AIRSTAGE™ J-III L

J-III L is an outdoor unit with a slim design offering a high degree of freedom of installation that is recommended for mid-size office buildings and hotels. Furthermore, you can connect up to 40\* indoor units with newly added 14/16 HP model. 14/16 HP model is also ideal for hospitals and educational facilities with many rooms. (\*: 16 HP model)

### Slim Outdoor Unit

Although this is a 14/16 HP model that can handle slightly larger properties, it has a slim depth of 480 mm. This model can be introduced and installed even in limited spaces.

### Small room application

Up to 30-40 indoor units can be connected by the optimum heat exchanger structure. Available to various small rooms.

### Top Class Low Operating Sound

Top class low operating sound is realized. Highly suited to densely populated areas thanks to their low operating sound.

NEW



14/16 HP models

8-12 HP models

150 Page



VRV

## AIRSTAGE™ J-III

J-III improves the system with up to 13 indoor units. This model is suitable for small buildings that bring together small stores.

### **High Energy Efficiency**

Heat pump inverter control is used to achieve an efficient cooling and heating operation in any indoor unit combination.

### **Flexible systems for small- and medium-size buildings air conditioning**

Space saving design and long piping design allow for flexible installation on the roofs or balconies of small and medium-size buildings.

Multiple indoor units of various capacities and types can be connected.

## AIRSTAGE™ J-IIS

J-IIS has a compact design with a height of 998 mm that does not obstruct visibility even when installed near waist-high windows. This model is also ideal for large houses, retail stores and other properties.

### **Space saving and low sound level design**

Economical individual air conditioning is realized by ALL-DC technology, large capacity DC twin rotary compressor, and 3-row heat exchanger though the size is compact.

### **Flexible systems for homes, shops, small-size buildings air conditioning**


Due to compact size design and flexible piping design, J-IIS series can be installed easily at the place where the installation space is limited such as homes, shops, and small offices. Multiple indoor units of various capacities and types can be connected.



154 Page



156 Page



## PRODUCT LINEUP: VRF

# AIRSTAGE™ V-Series OVERVIEW

AIRSTAGE™ V-Series Systems can be designed to effectively provide an air conditioning solution from a large domestic residence through to a large scale commercial building.



## AIRSTAGE™ VR-II

Smart and cutting edge design. Extensive lineup from 8 HP to 48 HP in 2 HP increment. Connectable indoor unit capacity ratio up to 150%

### Simultaneous cooling and heating operation using 1 refrigerant system

Cooling and heating can be freely selected for each indoor unit to provide simultaneous cooling and heating in the rooms with large temperature differences, etc.

### Annual cooling operation

Use annual cooling operation for the rooms and other spaces that require constant temperature control throughout the year.

### Handles changes in the temperature difference

The operation mode can be freely changed when there are large temperature differences during the day, such as between seasons.

## AIRSTAGE™ V-III

Smart and cutting edge design. Extensive lineup from 8 HP to 54 HP in 2 HP increment. Connectable indoor unit capacity ratio up to 150%

### Excellent energy saving

Heat pump inverter type realizes the highly energy saving air conditioning for individual cooling and heating operation by all inverter technology for seasonal efficiency.

### High design flexibility for various building air conditioning

High design flexibly meets the various needs of high-rise building air conditioning such as outdoor unit roof top concentrated installation and each floor installation by large capacity combination, sufficient connection capacity, and high static pressure design.

### Easy installation and maintenance

The flexible communication method and piping connections make installation and maintenance easy even for large systems.



**Energy saving technology that boosted operation efficiency**



**AIRSTAGE™ V-III**

Fujitsu General tropical VRF is designed for tropical weather. Extensive lineup from 8 HP to 54 HP in 2 HP increment. Connectable indoor unit capacity ratio up to 130%

#### **High ambient operation design**

Possible to operate cooling up to 52°C outdoor temperature

#### **Powerful cooling capacity design**

Keeping high cooling power at even high ambient temperature

#### **Anti-corrosion treatment design**

All metallic and PCB components are protected against corrosion



**166 Page**



#### **1 Powerful large propeller fan**

By using CFD\*1 technology, a newly designed fan achieves high performance and low noise operation.

\*1. CFD = Computational Fluid Dynamics



#### **2 3 phase DC fan motor**

Efficiency is substantially improved by high efficient motor with sophisticated driver control. In addition, low noise is realized by DC fan motor.



#### **3 Sine-wave DC inverter control**

High efficiency is realized by adoption of reduced switching loss IPM.



#### **4 4-face heat exchanger**

Heat exchange efficiency is significantly improved by the introduction of a new 4-face heat exchanger that increases effective surface area.



#### **5 Subcool heat exchanger**

High Heat Exchange efficiency is achieved by using an internal projection shape double pipe construction.



#### **6 High efficient and large capacity DC inverter compressor**

Large capacity high efficient DC twin rotary compressor with excellent intermediate capability.



#### **7 Front intake port (Corner cut air inlet structure)**

In multiple outdoor unit installations, the unique front intake design improves airflow into the Heat Exchanger.



VRF

## PRODUCT LINEUP: VRF

# VRF Outdoor Units Lineup



| Capacity (kW)                   | 12.1                              | 14.0 | 15.1-15.5 | 22.4                                | 28.0                                | 33.5                                | 40.0            | 45.0             | 50.4             | 55.9             | 61.5             | 67.0             | 73.5            |
|---------------------------------|-----------------------------------|------|-----------|-------------------------------------|-------------------------------------|-------------------------------------|-----------------|------------------|------------------|------------------|------------------|------------------|-----------------|
| HP                              | 4                                 | 5    | 6         | 8                                   | 10                                  | 12                                  | 14              | 16               | 18               | 20               | 22               | 24               | 26              |
| J-III Series<br>Page 150~       |                                   |      |           |                                     |                                     |                                     |                 |                  |                  |                  |                  |                  |                 |
| J-III Series<br>Page 154        |                                   |      |           | AJY072<br>LELAH                     | AJY090<br>LELAH                     | AJY108<br>LELAH                     | AJY126<br>LELAH | AJY144<br>LELAH  |                  |                  |                  |                  |                 |
| J-II Series<br>Page 156         |                                   |      |           | AJY040<br>LBLAH,<br>AJY040<br>LELAH | AJY040<br>LBLAH,<br>AJY040<br>LELAH | AJY054<br>LBLAH,<br>AJY054<br>LELAH |                 |                  |                  |                  |                  |                  |                 |
| VR-II Series Heat Recovery      | Space Saving<br>Page 158~         |      |           |                                     |                                     |                                     |                 |                  |                  |                  |                  |                  |                 |
|                                 | Set Model                         |      |           | AJY072<br>GALH                      | AJY090<br>GALH                      | AJY108<br>GALH                      | AJY126<br>GALH  | AJY144<br>GALH   | AJY162<br>GALH   | AJY180<br>GALH   | AJY198<br>GALH   | AJY216<br>GALH   | AJY234<br>GALH  |
| V-III Series Heat Pump          | Energy<br>Efficiency<br>Page 158~ |      |           |                                     |                                     |                                     |                 |                  |                  |                  |                  |                  |                 |
|                                 | Set Model                         |      |           |                                     |                                     |                                     |                 | AJY144<br>GALHH  |                  |                  | AJY198<br>GALHH  | AJY216<br>GALHH  | AJY234<br>GALHH |
| V-III Tropical Series Heat Pump | Space Saving<br>Page 162~         |      |           |                                     |                                     |                                     |                 |                  |                  |                  |                  |                  |                 |
|                                 | Set Model                         |      |           | AJY072<br>LALBH                     | AJY090<br>LALBH                     | AJY108<br>LALBH                     | AJY126<br>LALBH | AJY144<br>LALBH  | AJY162<br>LALBH  | AJY180<br>LALBH  | AJY198<br>LALBH  | AJY216<br>LALBH  | AJY234<br>LALBH |
| V-III Tropical Series Heat Pump | Energy<br>Efficiency<br>Page 162~ |      |           |                                     |                                     |                                     |                 |                  |                  |                  |                  |                  |                 |
|                                 | Set Model                         |      |           |                                     |                                     |                                     |                 | AJY144<br>LALBHH | AJY162<br>LALBHH | AJY180<br>LALBHH | AJY216<br>LALBHH | AJY234<br>LALBHH |                 |
| V-III Tropical Series Heat Pump | Space Saving<br>Page 166~         |      |           |                                     |                                     |                                     |                 |                  |                  |                  |                  |                  |                 |
|                                 | Set Model                         |      |           | AJY072<br>LNLBH                     | AJY090<br>LNLBH                     | AJY108<br>LNLBH                     | AJY126<br>LNLBH | AJY144<br>LNLBH  | AJY162<br>LNLBH  | AJY180<br>LNLBH  | AJY198<br>LNLBH  | AJY216<br>LNLBH  | AJY234<br>LNLBH |
| V-III Tropical Series Heat Pump | Energy<br>Efficiency<br>Page 166~ |      |           |                                     |                                     |                                     |                 |                  |                  |                  |                  |                  |                 |
|                                 | Set Model                         |      |           |                                     |                                     |                                     |                 | AJY144<br>LNLBHH | AJY162<br>LNLBHH | AJY180<br>LNLBHH | AJY216<br>LNLBHH | AJY234<br>LNLBHH |                 |

| 78.5             | 85.0             | 90.0             | 95.0             | 100.5            | 107.0            | 112.0            | 118.5            | 123.5            | 130.0            | 135.0           | 140.0           | 145.0           | 150.0           |
|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-----------------|-----------------|-----------------|-----------------|
| 28               | 30               | 32               | 34               | 36               | 38               | 40               | 42               | 44               | 46               | 48              | 50              | 52              | 54              |
|                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                 |                 |                 |                 |
|                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                 |                 |                 |                 |
|                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                 |                 |                 |                 |
|                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                 |                 |                 |                 |
|                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                 |                 |                 |                 |
| AJY252<br>GALH   | AJY270<br>GALH   | AJY288<br>GALH   | AJY306<br>GALH   | AJY324<br>GALH   | AJY342<br>GALH   | AJY360<br>GALH   | AJY378<br>GALH   | AJY396<br>GALH   | AJY414<br>GALH   | AJY432<br>GALH  |                 |                 |                 |
| AJY252<br>GALHH  | AJY270<br>GALHH  | AJY288<br>GALHH  | AJY306<br>GALHH  | AJY324<br>GALHH  | AJY342<br>GALHH  | AJY360<br>GALHH  | AJY378<br>GALHH  | AJY396<br>GALHH  |                  |                 |                 |                 |                 |
| AJY252<br>LALBH  | AJY270<br>LALBH  | AJY288<br>LALBH  | AJY306<br>LALBH  | AJY324<br>LALBH  | AJY342<br>LALBH  | AJY360<br>LALBH  | AJY378<br>LALBH  | AJY396<br>LALBH  | AJY414<br>LALBH  | AJY432<br>LALBH | AJY450<br>LALBH | AJY468<br>LALBH | AJY486<br>LALBH |
| AJY252<br>LALBHH | AJY270<br>LALBHH | AJY288<br>LALBHH | AJY306<br>LALBHH | AJY324<br>LALBHH | AJY342<br>LALBHH | AJY360<br>LALBHH | AJY378<br>LALBHH | AJY396<br>LALBHH | AJY414<br>LALBHH |                 |                 |                 |                 |
| AJY252<br>LNLBH  | AJY270<br>LNLBH  | AJY288<br>LNLBH  | AJY306<br>LNLBH  | AJY324<br>LNLBH  | AJY342<br>LNLBH  | AJY360<br>LNLBH  | AJY378<br>LNLBH  | AJY396<br>LNLBH  | AJY414<br>LNLBH  | AJY432<br>LNLBH | AJY450<br>LNLBH | AJY468<br>LNLBH | AJY486<br>LNLBH |
| AJY252<br>LNLBLH | AJY270<br>LNLBLH | AJY288<br>LNLBLH | AJY306<br>LNLBLH | AJY324<br>LNLBLH | AJY342<br>LNLBLH | AJY360<br>LNLBLH | AJY378<br>LNLBLH | AJY396<br>LNLBLH | AJY414<br>LNLBLH |                 |                 |                 |                 |


## PRODUCT LINEUP: VRF

# CORE TECHNOLOGY

for AIRSTAGE™ J-Series & V-Series

## High Energy Efficiency

Efficiency is improved significantly by using DC twin rotary compressor, inverter technology, and large heat exchanger

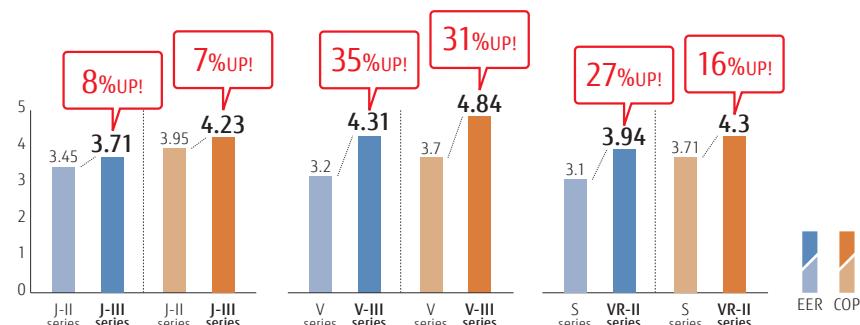

Heat Pump (6 HP)



Heat Pump (8 HP)



Heat Recovery (10 HP)

## High Efficiency Technology

**AIRSTAGE™ J-III**


### **ALL DC** High efficiency design with top class SEER/SCOP


All small VRF series including new J-III series have DC technology to realize the high efficiency operation. This enhances the durability and reliability of small VRF series.



### Low ambient operation

Refrigeration cycle technology allows cooling operation even at -15°C.

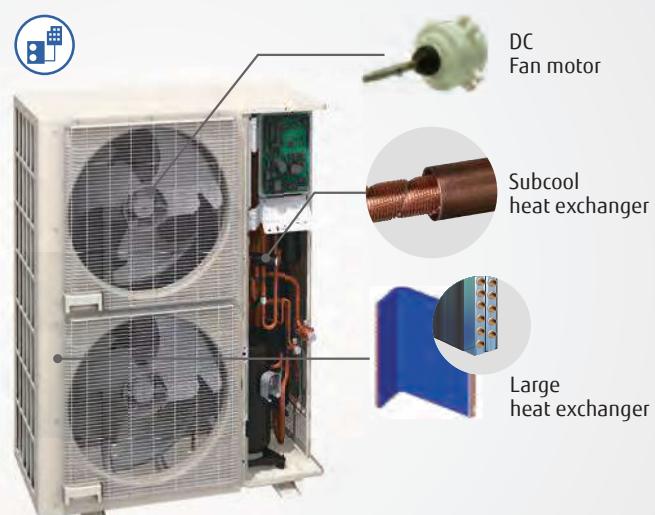

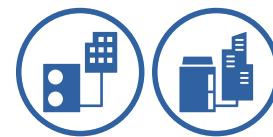

# Energy Saving Function



## Economy operation

Economy operation can be set by remote controller. The temperature setting is offset automatically over a certain period of time.



## Room temperature set point limitation

The minimum and maximum temperature ranges can be limited, which provide further energy saving while maintaining the comfort of the occupants.



## Auto-off timer


- The indoor unit automatically is turned off when it reaches to the preset operating time frame.
- The time frame of the "Auto off timer" can be flexibly scheduled.




## Capacity save operation

Operation capacity can be set in 5 steps for rated capability. The power consumption at peak is cut down and the maximum load is suppressed.

### Room temperature set point limitation

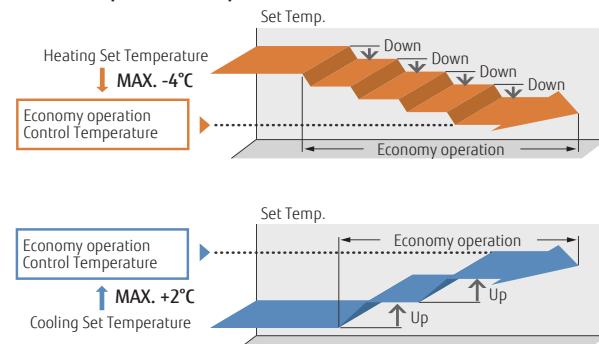

### Auto-off timer

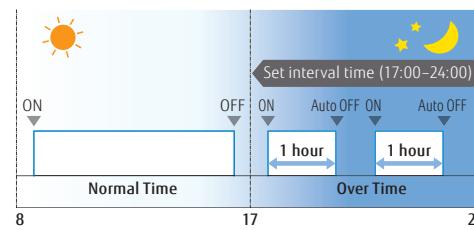

# More Comfort

## Precision refrigerant flow control

Precise and smooth refrigerant flow control is achieved by using a DC Inverter control in conjunction with individual indoor unit electronic expansion valve control. This allows high precision comfortable temperature control of  $\pm 0.5^\circ\text{C}$ .



## Auto changeover function



At Auto setting, the cooling/heating mode is automatically switched according to the set temperature and room temperature.




## Quiet operation

Two low noise modes can be selected automatically by quiet priority setting and capacity priority setting depending on the indoor environment and outside temperature load. This feature can be controlled via outdoor unit external input and/or system controller.

### Auto changeover

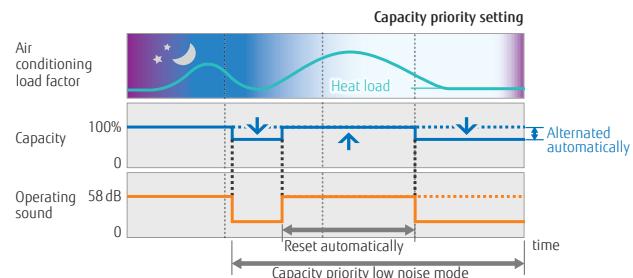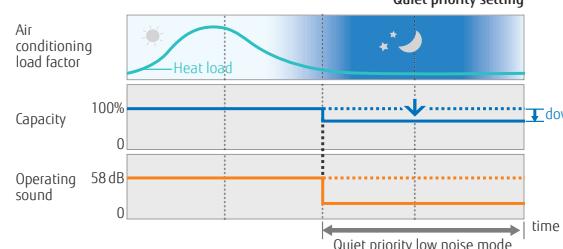



## PRODUCT LINEUP: VRF-CORE TECHNOLOGY for AIRSTAGE™ J-Series & V-Series

# Design Flexibility



### Top class Compact design

Compact outdoor unit can be attained at the top class in the industry by optimal airflow structure design. (Up to 16 HP)




AIRSTAGE™ J-Series Compact Outdoor Unit



### Long piping design

Piping design suitable for long, narrow office buildings with a difference in height and low-rise shops with depth  
(AIRSTAGE™ J-III-L series)

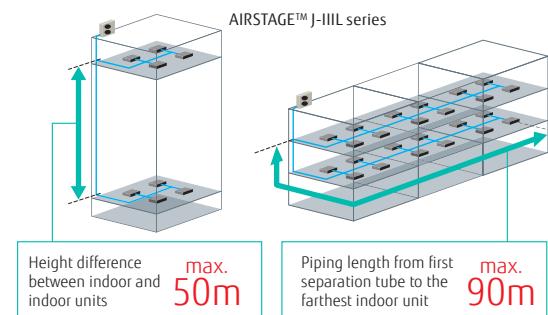

### Overall piping length Max. 1,000 m



World's top class overall piping length of 1,000 m allows for application in a wide variety of buildings.

Actual pipe length  
**Max. 165 m**

Pipe length from first separation tube to the farthest indoor unit  
**Max. 90 m<sup>\*1\*2</sup>**

\*1: V-III series. The limitation on the pipe length between the farthest IU and the nearest IU originated from the first separation tube must be 60 m or less.


\*2: VR-II series is max. 60 m.


AIRSTAGE™ VR-II series & V-III series

Height difference between outdoor and indoor units  
**Max. 50 m**

For the outdoor unit installed below the indoor units: 40 m max.

Height difference between indoor and indoor units  
**Max. 15 m**

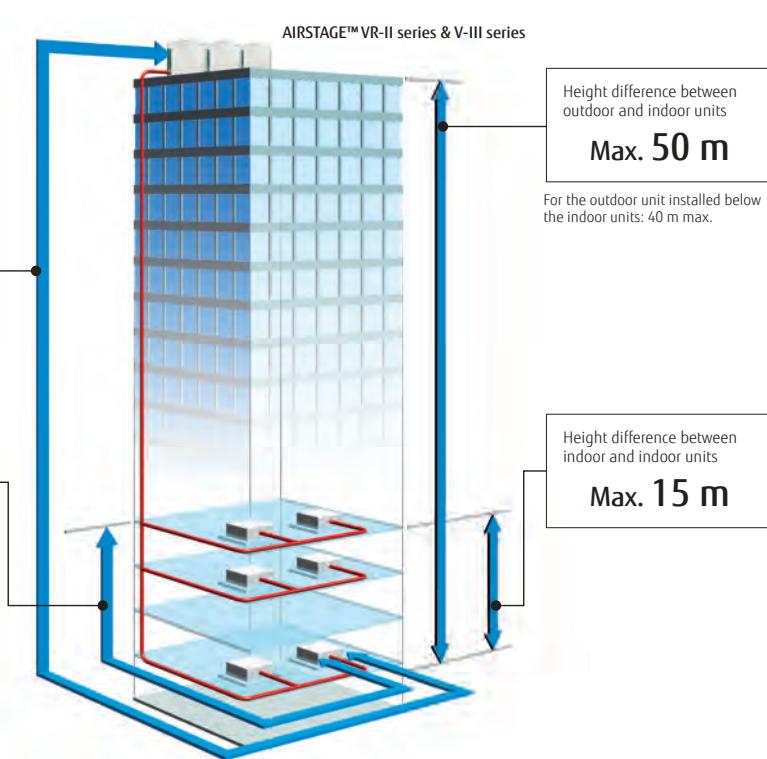

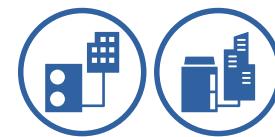

## High capacity connection

| Series | Connectable indoor unit capacity range                 | Connectable indoor unit number                     |
|--------|--|--|
|        | AIRSTAGE™ J-III series<br>14/16 HP<br>Heat Pump type   | 50% to 150%* <sup>3</sup><br>up to 40              |
|        | AIRSTAGE™ J-III series<br>8/10/12 HP<br>Heat Pump type | 50% to 150%* <sup>3</sup><br>up to 30              |
|        | AIRSTAGE™ J-III series<br>Heat Pump type               | 50% to 150%* <sup>3</sup><br>up to 13              |
|        | AIRSTAGE™ J-IIS series<br>Heat Pump type               | 50%* <sup>4</sup> to 130%* <sup>3</sup><br>up to 8 |
|        | AIRSTAGE™ VR-II series<br>Heat Recovery Modular type   | 50% to 150%* <sup>3</sup><br>up to 64              |
|        | AIRSTAGE™ V-III series<br>Heat Pump Modular type       | 50% to 150%* <sup>5</sup><br>up to 64              |

\*3: Conditions of maximum connectable indoor unit capacity ratio is as the chart above.

\*4: Only 4 HP is 46%

\*5: Max. capacities in the combinations including the 18 HP outdoor unit fall below 150%.



## Designed for low refrigerant charge

Optimal design of indoor unit and outdoor unit reduces the refrigerant volume and special support is not required even when installing in a small room of about 15 m<sup>2</sup>.



## Various optional parts

- Intake fresh air with our Fresh Air Intake kit
- Comfortable temperature control with a remote sensor
- Operation by linking up to ventilation equipment and air handling unit with the DX-Kit



Fresh Air Intake kit



EEV unit




Control unit


## Wide operating range

Installation in extreme temperature conditions is possible due to an increase in operational range.

\*6: Note: When a multiple outdoor unit connection is used, operating range is from -5°C to 46°C in cooling.

\*7: Only when all indoor units are 5.6 kW or more in the system, the operation range is -15 to 46°C.

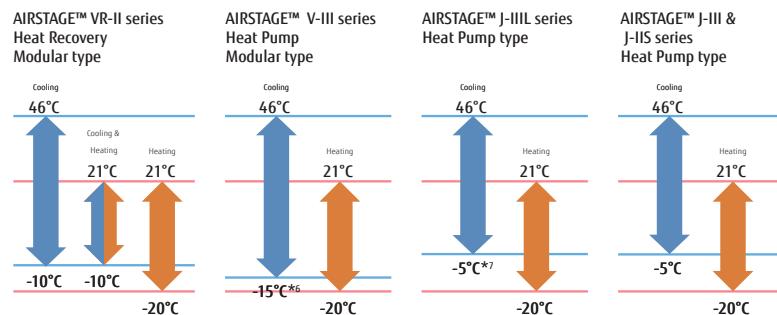




## PRODUCT LINEUP: VRF-CORE TECHNOLOGY for AIRSTAGE™ J-Series & V-Series

# High Reliability




### Liquid flow back protection

By adopting a large sized accumulator, not completely vapourised refrigerant stays inside of the accumulator to ensure no liquid refrigerant is being fed into the compressor.

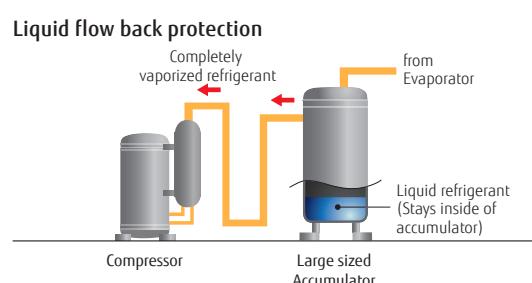

### Backup operation<sup>\*1</sup>


If one compressor fails, backup operation will be performed by the remaining compressors.<sup>\*2</sup>

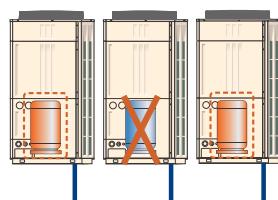

<sup>\*1</sup>: Not available for AIRSTAGE™ J-III and J-IIS series    <sup>\*2</sup>: Note: Backup operation may not be possible depending on the trouble state.

### Advanced refrigerant control<sup>\*1</sup>

Innovative compressor control logic has been introduced in order to balance the refrigerant mass flow rate of each outdoor unit by controlling the inverter speed.

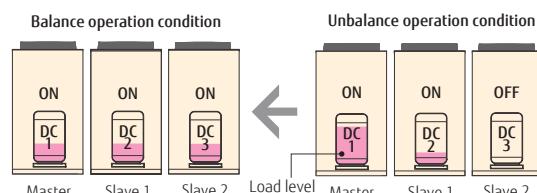


# Easy Installation



### Simple wiring work

Installation of the wiring systems is made easier as the communication wiring can be installed continuously between the indoor, outdoor and RB units.

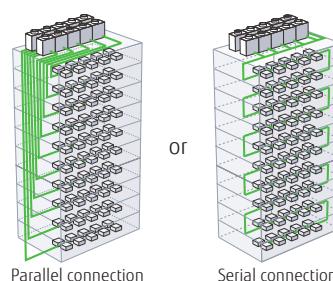


Up to maximum length  
**3,600 m**

Note: Serial connection can't use the automatic address setting in a multiple refrigerant system.

### Automatic address setting

The address of the indoor unit, RB unit and signal amplifier through the automatic function setting on the outdoor unit PCB.

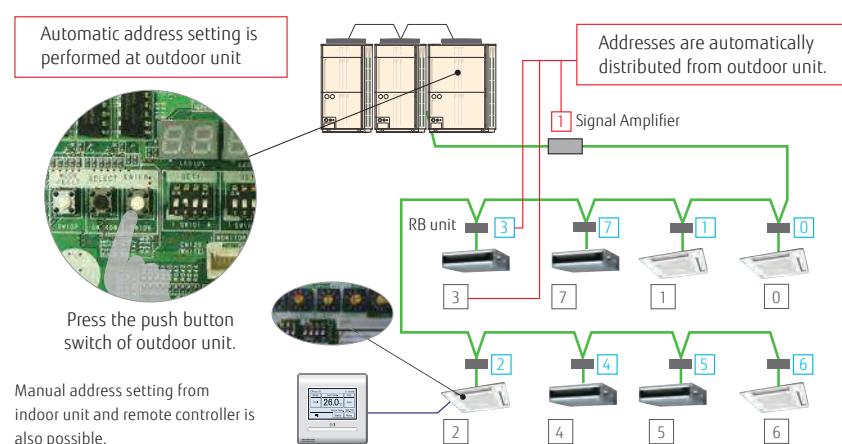



# Easy Service & Maintenance

## Design for easy maintenance


### Easy to read 7-segment LED :

Confirm detailed operational and error status without using any specific equipment.

- Operation mode status
- Discharge temperature/Pressure status
- Compressor operation indication
- Address/type/number of outdoor unit

### Movable PCB panel:


Easier for maintenance work behind the PCB

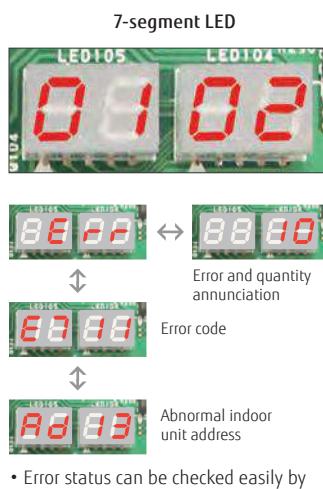

- Error status can be checked easily by outdoor unit display

### Error status can be checked easily via the indoor unit wired controller


An error code is displayed on a liquid crystal screen.

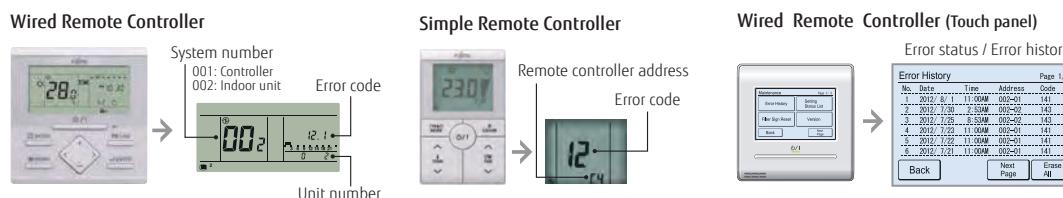

## Error diagnosis by Service Tool

### Connection to Service Tool


- Detail operation status and recent error history can be checked and analyzed by using the Service Tool.
- Last 5 min. operation memory can be also be recorded.

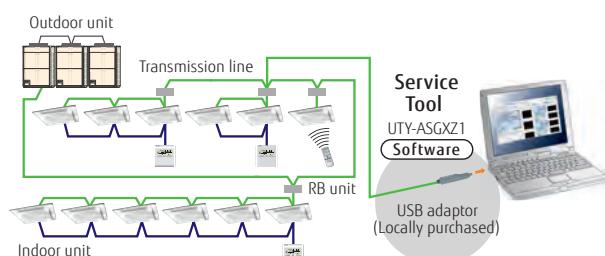


## Remote monitoring

The Web Monitoring system allows you to view system operation anytime over the internet, ensuring issue free operation.

The operating VRF network system in the building can be monitored real time over the Internet.

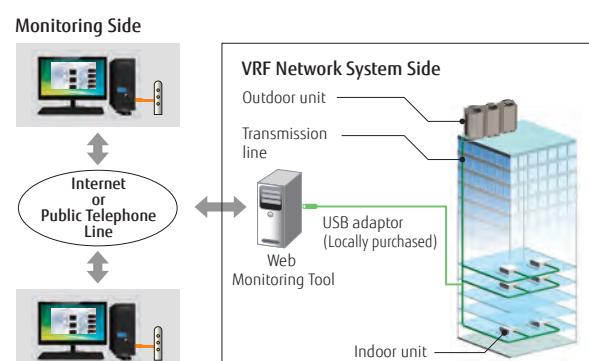



## PRODUCT LINEUP: VRF-AIRSTAGE™ J-Series


# AIRSTAGE™ J-III L

**NEW** 14/16 HP models & 8/10/12 HP models



Fujitsu General provides perfect total air conditioning systems that take into account energy saving, low noise, comfortable airflow, small room application and centralized control for small-sized office buildings with many small rooms.

Image: 8/10/12 HP models



SPLIT

## Slim & Compact Design



MULTI SPLIT


VRV

VENTILATION

OPTIONAL PARTS

AIR TO WATER

### Inhouse installation

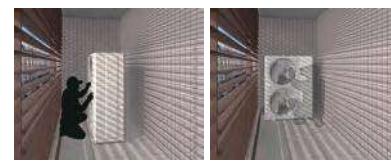

#### Low noise in consideration for the nearby residents

This model is front blow type and about 1000 mm wide, so flexible installation is possible even at narrow inhouse space.

### Installation at building back side



#### Space saving

Due to compact and thin model, direct ground installation or wall mounted installation is possible even at narrow off-street.

### Installation at back street of building



#### Flexible installation

This model is front blow type and slim & low body, so installation space is compact. Building windows are not blocked and space saving multiple units installation is possible.



## PRODUCT LINEUP: VRF-AIRSTAGE™ J-Series

NEW

### Heat Pump for Small Capacity Type




#### Long Piping Length

Our advanced refrigerant control technology allows us to achieve a total refrigerant piping length of 400 m. This opens up new possibilities in system design.

#### Up to 40 units\* can be connected

The combination of the smallest but adequate capacity indoor unit and a new outdoor unit with the optimum heat exchanger structure has realized the industry's top class connection of 40 units. \*: 16 HP models. 8, 10, 12, 14 HP models are 30 units.

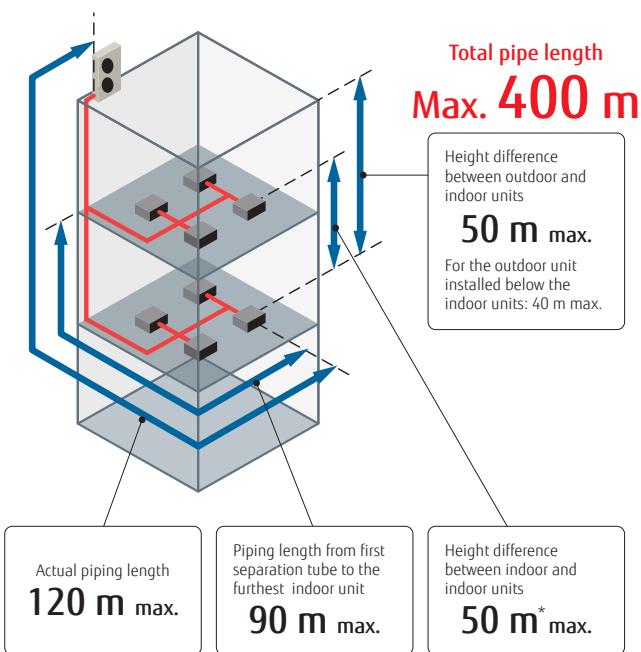

\*: Only when new indoor units and J-III series are combined

#### High Static Pressure

External static pressure is available up to 60Pa for 14/16HP. (20Pa for 8/10HP, 30Pa for 12HP)



#### Top Class Low Operating Sound

Top class low operating sound is realized. Highly suited to densely populated areas thanks to their low operating sound.

##### Sound Power Level

**66 dB(A)**



8,10,12HP: AJY072LELAH / AJY090LELAH / AJY108LELAH  
14,16HP: AJY126LELAH / AJY144LELAH

NEW



8, 10, 12 HP

14, 16 HP

### Specifications

|                                    |                                 | Tentative                |                                   |               |               |               |  |
|------------------------------------|---------------------------------|--------------------------|-----------------------------------|---------------|---------------|---------------|--|
| Rating Capacity range              | HP                              | 8                        | 10                                | 12            | 14            | 16            |  |
| Model name                         |                                 | AJY072LELAH              | AJY090LELAH                       | AJY108LELAH   | AJY126LELAH   | AJY144LELAH   |  |
| Maximum Connectable Indoor Unit    |                                 | 1-20                     | 1-25                              | 1-30          | 1-36          | 1-40          |  |
| Power source                       |                                 | 3 phase, ~400V, 50Hz     |                                   |               |               |               |  |
| Capacity                           | Cooling                         | kW                       | 22.4                              | 28.0          | 33.5          | 40.0          |  |
|                                    | Nominal Heating                 |                          | 22.4                              | 28.0          | 33.5          | 40.0          |  |
|                                    | Max Heating                     |                          | 25.0                              | 31.5          | 37.5          | 45.0          |  |
| Input power                        | Cooling                         | kW                       | 6.30                              | 8.59          | 10.42         | 12.12         |  |
|                                    | Nominal Heating                 |                          | 4.65                              | 6.61          | 8.18          | 9.71          |  |
|                                    | Max Heating                     |                          | 5.45                              | 8.29          | 10.25         | 11.82         |  |
| EER                                | Cooling                         | W/W                      | 3.56                              | 3.26          | 3.22          | 3.30          |  |
| COP                                | Nominal Heating                 |                          | 4.82                              | 4.24          | 4.10          | 4.12          |  |
|                                    | Max Heating                     |                          | 4.56                              | 3.80          | 3.66          | 3.81          |  |
| Airflow rate                       |                                 | m³/h                     | 8,400                             | 9,000         | 11,000        | 13,000        |  |
| Sound pressure level / Power level | Cooling                         | dB(A)                    | 52/66                             | 54/69         | 59/73         | 62/75         |  |
|                                    | Heating                         |                          | 54/-                              | 57/-          | 61/-          | 63/-          |  |
| Net Dimensions                     | Height                          | mm                       | 1,428                             | 1,428         | 1,428         | 1,638         |  |
|                                    | Width                           |                          | 1,080                             | 1,080         | 1,080         | 1,080         |  |
|                                    | Depth                           |                          | 480                               | 480           | 480           | 480           |  |
| Weight                             |                                 | kg                       | 170                               | 177           | 178           | 210           |  |
| Refrigerant                        | Type (Global Warming Potential) |                          | R410A (2,088)                     | R410A (2,088) | R410A (2,088) | R410A (2,088) |  |
|                                    | Charge                          | kg(CO <sub>2</sub> eq-T) | 7.0 (14.6)                        | 7.5 (15.7)    | 7.5 (15.7)    | 11.0 (22.9)   |  |
| Connection pipe diameter           | Liquid                          | mm                       | 9.52                              | 9.52          | 12.70         | 12.70         |  |
|                                    | Gas                             |                          | 19.05                             | 22.20         | 28.58         | 28.58         |  |
| Total pipe length                  |                                 | m                        | 400                               | 400           | 400           | 400           |  |
| Max. height difference             |                                 |                          | 50/40 (Outdoor unit: Upper/Lower) |               |               |               |  |
| Operation range                    | Cooling                         | °C                       | -5 to 46*                         | -5 to 46*     | -5 to 46*     | -5 to 46*     |  |
|                                    | Heating                         |                          | -20 to 21                         | -20 to 21     | -20 to 21     | -20 to 21     |  |

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating: Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.


Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.

\* The cooling operation range of -15 to 46°C is allowed only when all of the indoor units connected to the system are higher than capacity of 5.6kW.


### Dimensions

(Unit : mm)

#### 8, 10, 12 HP

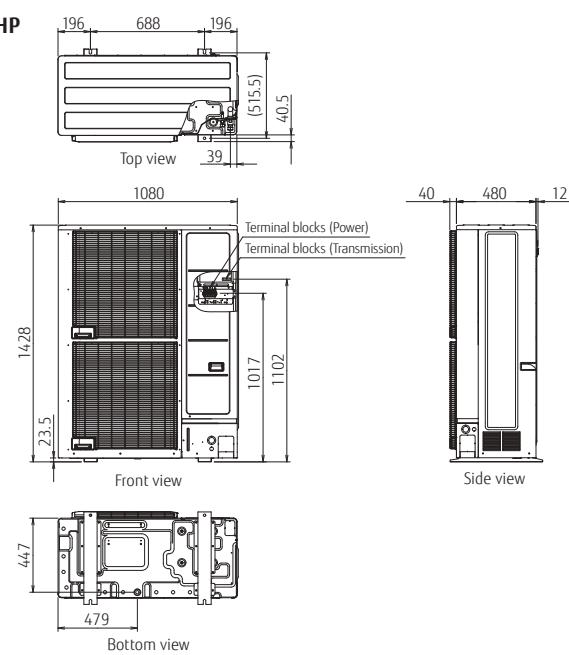

#### 14, 16 HP

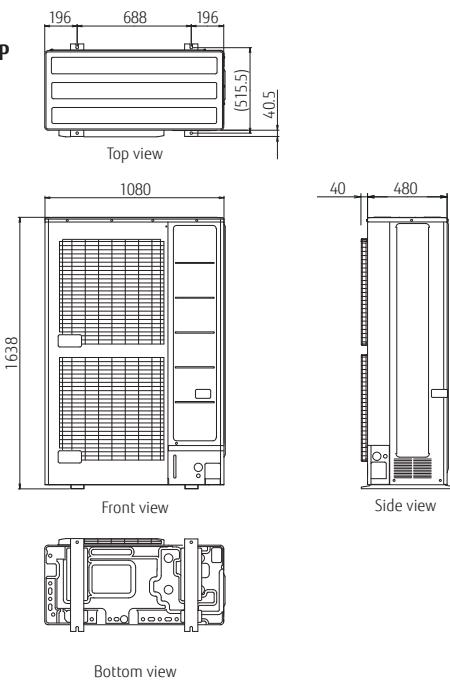

SPLIT

MULTI SPLIT

VRF

VENTILATION

OPTIONAL PARTS

AIR TO WATER



## PRODUCT LINEUP: VRF-AIRSTAGE™ J-Series

### Heat Pump for Small Capacity Type

**AIRSTAGE™ J-III**



#### Long Piping Length

Our advanced refrigerant control technology allows us to achieve a total refrigerant piping length of 180 m. This opens up new possibilities in system design.



**Total pipe length  
Max. 180 m**

Height difference  
between outdoor and  
indoor units

**50 m max.**

For the outdoor unit  
installed below the  
indoor units: 40 m max.

Height difference  
between indoor and  
indoor units

**15 m max.**

Piping length from first  
separation tube to the  
furthest indoor unit


**40 m max.**

Actual piping length

**120 m max.**


#### Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

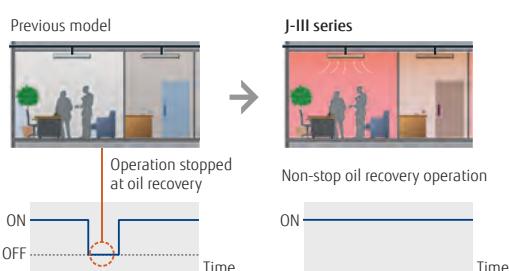

#### Easier Installation

**Connection check function** : Possible to confirm whether wiring connection and address setting are correct by a quick check run function.

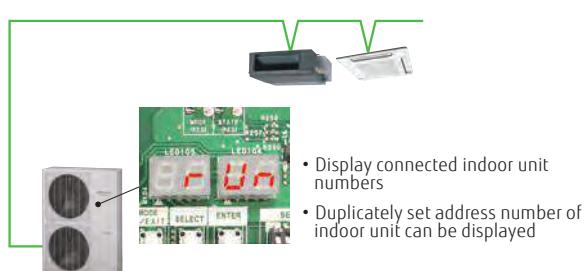

4,5,6HP : AJY040LBLAH / AJY045LBLAH / AJY054LBLAH  
AJY040LELAH [3phase] / AJY045LELAH [3phase] / AJY054LELAH [3phase]



### Specifications

| Rating Capacity range              | HP                              | 4           | 5                                 | 6             | 4             | 5             | 6             |
|------------------------------------|---------------------------------|-------------|-----------------------------------|---------------|---------------|---------------|---------------|
| Model name                         |                                 | AJY040LBLAH | AJY045LBLAH                       | AJY054LBLAH   | AJY040LELAH   | AJY045LELAH   | AJY054LELAH   |
| Maximum Connectable Indoor Unit    |                                 | 1-9         | 1-10                              | 1-13          | 1-9           | 1-10          | 1-13          |
| Power source                       |                                 |             |                                   |               |               |               |               |
| Capacity                           | Cooling                         | kW          | 12.1                              | 14.0          | 15.5          | 12.1          | 14.0          |
|                                    | Heating                         |             | 13.6                              | 16.0          | 18.0          | 13.6          | 16.0          |
| Input power                        | Cooling                         | kW          | 2.90                              | 3.57          | 4.18          | 2.79          | 3.46          |
|                                    | Heating                         |             | 2.80                              | 3.55          | 4.26          | 2.71          | 3.40          |
| EER                                | Cooling                         | W/W         | 4.17                              | 3.92          | 3.71          | 4.33          | 4.05          |
| COP                                | Heating                         | W/W         | 4.86                              | 4.51          | 4.23          | 5.01          | 4.70          |
| Airflow rate                       |                                 | m³/h        | 6,200                             | 6,400         | 6,900         | 6,200         | 6,400         |
| Sound pressure level / Power level | Cooling                         | dB(A)       | 50 / 66                           | 51 / 67       | 53 / 69       | 50 / 66       | 51 / 67       |
|                                    | Heating                         |             | 52 / 68                           | 53 / 69       | 55 / 71       | 52 / 68       | 53 / 69       |
| Heat exchanger fin                 |                                 |             | Blue fin                          | Blue fin      | Blue fin      | Blue fin      | Blue fin      |
| Net Dimensions                     | Height                          | mm          | 1,334                             | 1,334         | 1,334         | 1,334         | 1,334         |
|                                    | Width                           |             | 970                               | 970           | 970           | 970           | 970           |
|                                    | Depth                           |             | 370                               | 370           | 370           | 370           | 370           |
| Weight                             | kg                              |             | 117                               | 117           | 119           | 119           | 119           |
| Refrigerant                        | Type (Global Warming Potential) |             | R410A (2,088)                     | R410A (2,088) | R410A (2,088) | R410A (2,088) | R410A (2,088) |
|                                    | Charge kg(CO <sub>2</sub> eq-T) |             | 4.8 (10.0)                        | 5.3 (11.1)    | 5.3 (11.1)    | 4.8 (10.0)    | 5.3 (11.1)    |
| Connection pipe diameter           | Liquid                          | mm          | 9.52                              | 9.52          | 9.52          | 9.52          | 9.52          |
|                                    | Gas                             |             | 15.88                             | 15.88         | 19.05         | 15.88         | 15.88         |
| Total pipe length                  |                                 | m           | 180                               | 180           | 180           | 180           | 180           |
| Max. height difference             |                                 |             | 50/40 (Outdoor unit: Upper/Lower) |               |               |               |               |
| Operation range                    | Cooling                         | °C          | -5 to 46                          | -5 to 46      | -5 to 46      | -5 to 46      | -5 to 46      |
|                                    | Heating                         |             | -20 to 21                         | -20 to 21     | -20 to 21     | -20 to 21     | -20 to 21     |

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.


Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.

The protective function may work when using it outside the operation range.

### Dimensions

(Unit : mm)

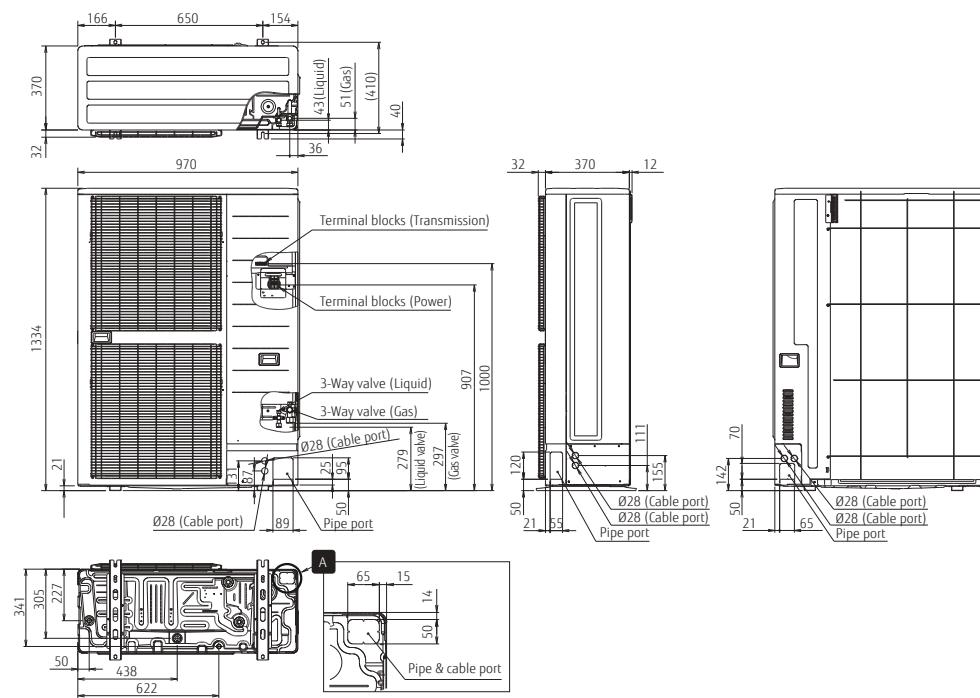




## PRODUCT LINEUP: VRF-AIRSTAGE™ J-Series

### Heat Pump for Small Capacity Type

**AIRSTAGE™ J-II Series**

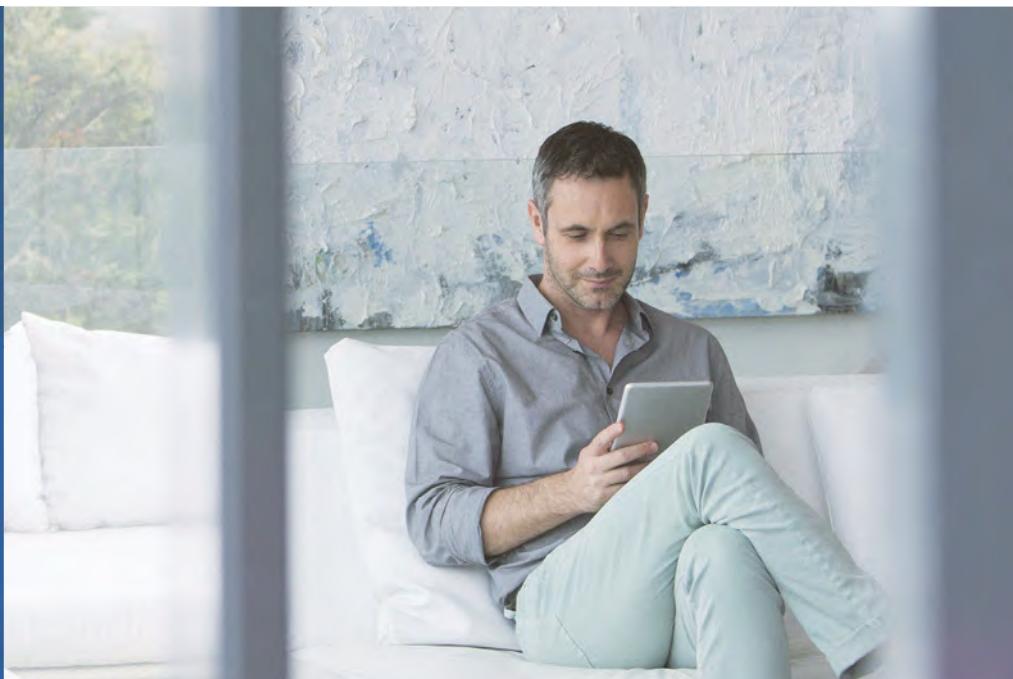


#### Long piping length

Our advanced refrigerant control technology allows us to achieve a total refrigerant piping length of 80 m. This opens up new possibilities in system design.




Total pipe length

**Max. 80 m**

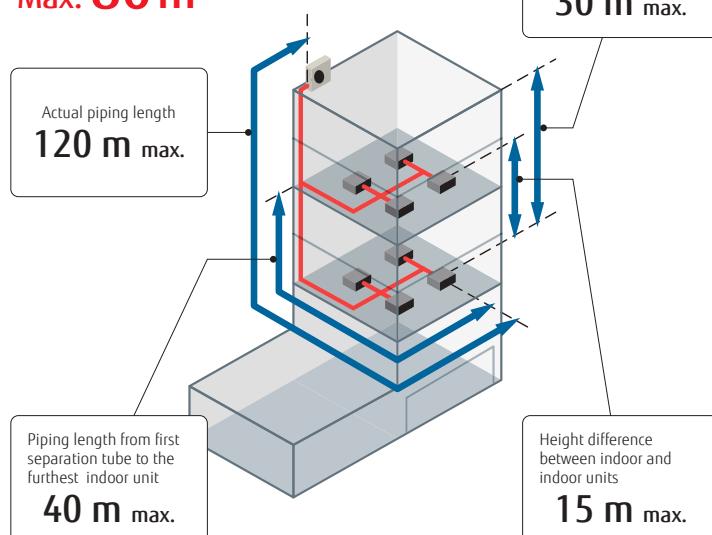


#### Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

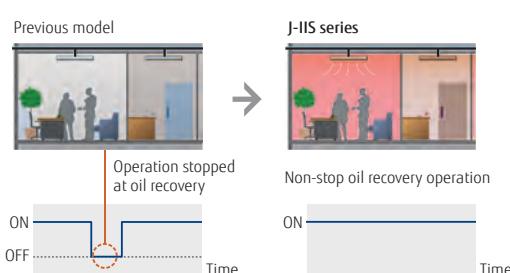

#### Easier Installation

**Connection check function** : Possible to confirm whether wiring connection and address setting are correct by a quick check run function.

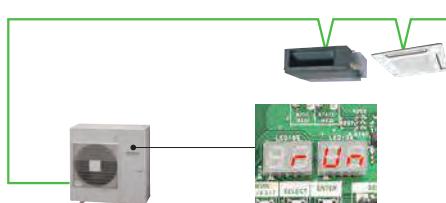

- Display connected indoor unit numbers
- Duplicately set address number of indoor unit can be displayed

4,5,6HP : AJY040LCLAH / AJY045LCLAH / AJY054LCLAH



### Specifications

|                                    | HP                              | 4                         | 5                     | 6                     |                       |
|------------------------------------|---------------------------------|---------------------------|-----------------------|-----------------------|-----------------------|
| Model name                         |                                 | AJY040LCLAH               | AJY045LCLAH           | AJY054LCLAH           |                       |
| Maximum Connectable Indoor Unit    |                                 | 7                         | 8                     | 8                     |                       |
| Power source                       |                                 | Single-phase, ~230V, 50Hz |                       |                       |                       |
| Capacity                           | Cooling<br>Heating              | kW                        | 12.1<br>13.6          | 14.0<br>16.0          | 15.1<br>16.5          |
| Input power                        | Cooling<br>Heating              | kW                        | 3.44<br>3.09          | 4.43<br>3.93          | 5.03<br>4.11          |
| EER                                | Cooling                         | W/W                       | 3.52                  | 3.16                  | 3.00                  |
| COP                                | Heating                         | W/W                       | 4.40                  | 4.07                  | 4.01                  |
| Airflow rate                       |                                 | m³/h                      | 4,040                 | 4,200                 | 4,200                 |
| Sound pressure level / Power level | Cooling<br>Heating              | dB(A)                     | 51 / 67<br>54 / 68    | 53 / 69<br>55 / 69    | 54 / 70<br>56 / 70    |
| Heat exchanger fin                 |                                 |                           | Blue fin              | Blue fin              | Blue fin              |
| Net Dimensions                     | Height<br>Width<br>Depth        | mm                        | 998<br>970<br>370     | 998<br>970<br>370     | 998<br>970<br>370     |
| Weight                             |                                 | kg                        | 86                    | 86                    | 87                    |
| Refrigerant                        | Type (Global Warming Potential) |                           | R410A (2,088)         | R410A (2,088)         | R410A (2,088)         |
|                                    | Charge kg(CO <sub>2</sub> eq-T) |                           | 4.0 (8.4)             | 4.0 (8.4)             | 4.0 (8.4)             |
| Connection pipe diameter           | Liquid<br>Gas                   | mm                        | 9.52<br>15.88         | 9.52<br>15.88         | 9.52<br>15.88         |
| Total pipe length                  |                                 | m                         | 80                    | 80                    | 80                    |
| Max. height difference             |                                 | m                         | 30                    | 30                    | 30                    |
| Operation range                    | Cooling<br>Heating              | °C                        | -5 to 46<br>-20 to 21 | -5 to 46<br>-20 to 21 | -5 to 46<br>-20 to 21 |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.


Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.


Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.

The protective function may work when using it outside the operation range.


### Dimensions

(Unit : mm)

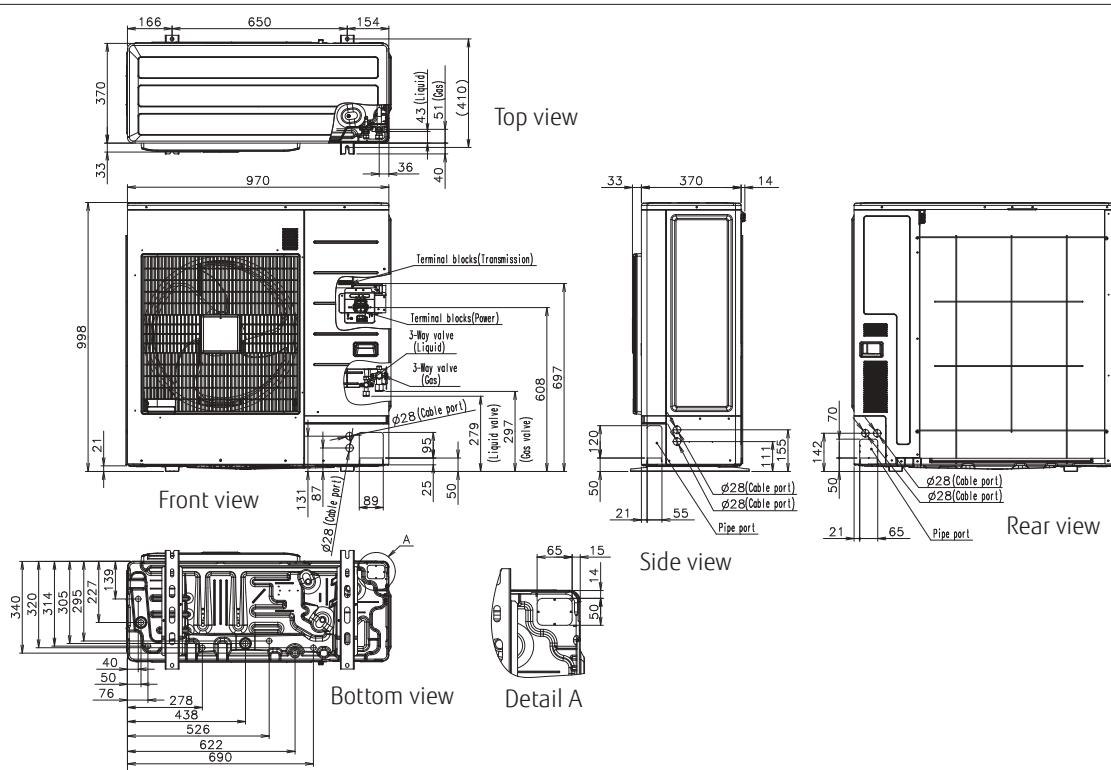






## PRODUCT LINEUP: VRF-AIRSTAGE™ V-Series

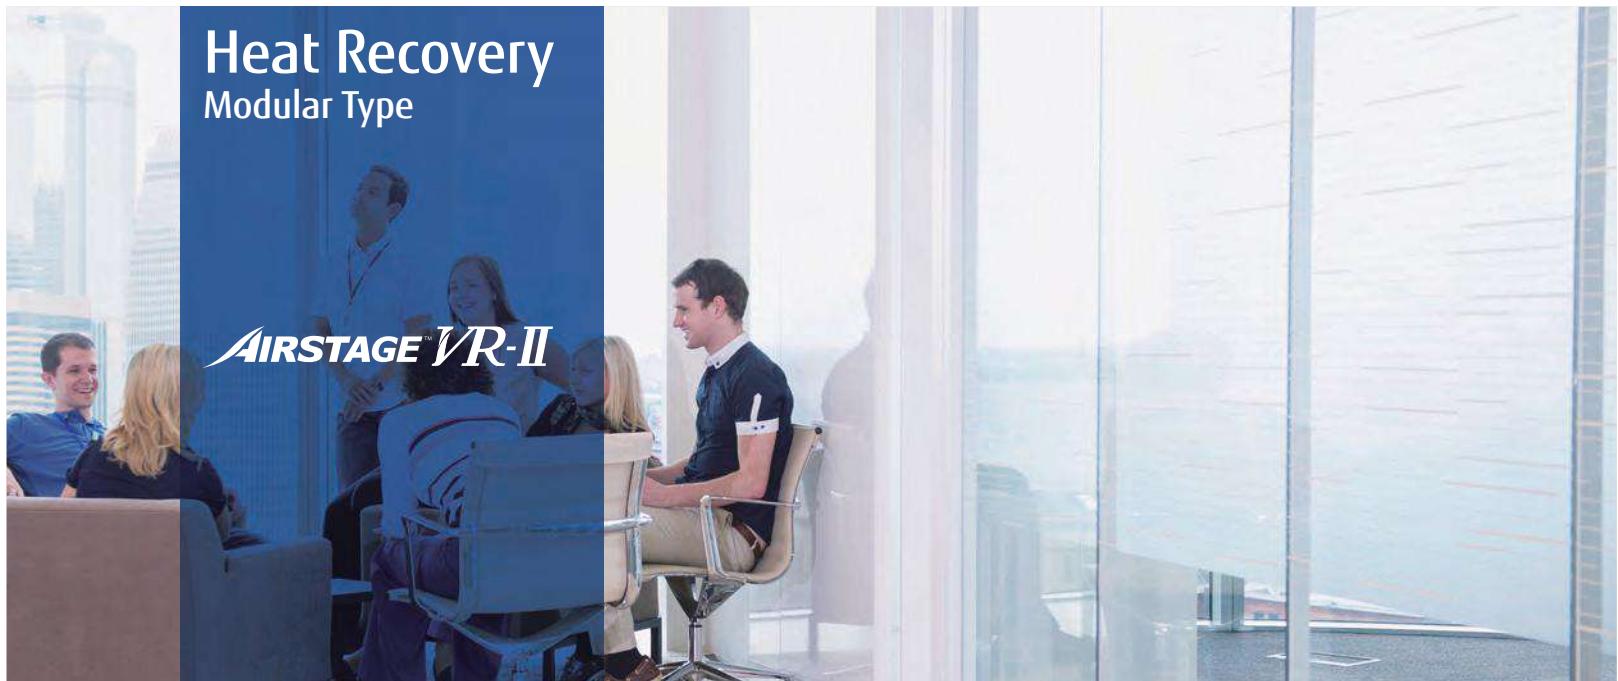

### High Operating Energy Efficiency

Our Heat recovery systems achieve high operating energy efficiency by drawing heat from the room to be cooled and transferring it as energy for rooms that are to be heated.

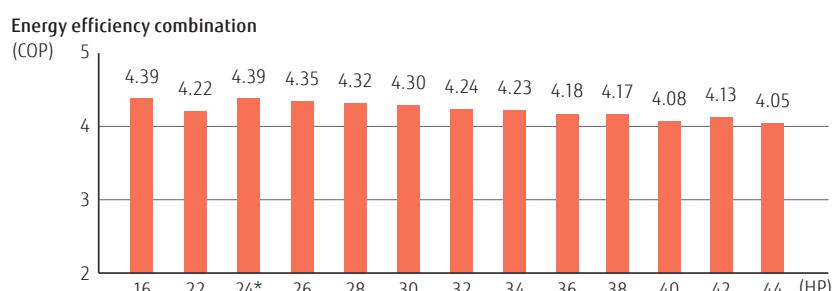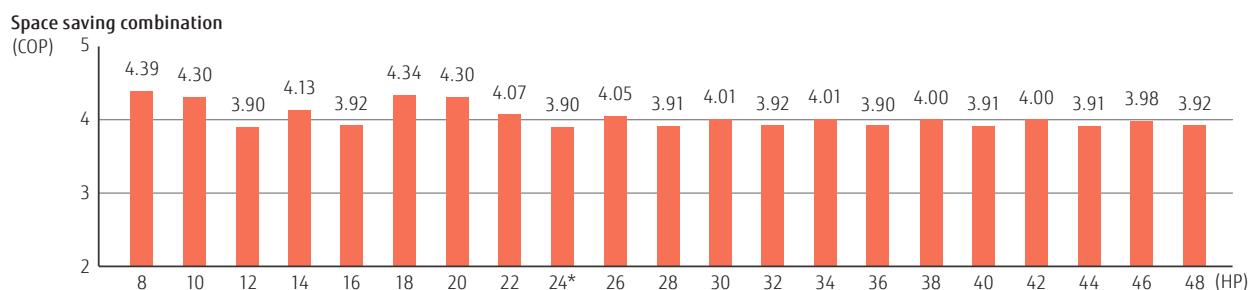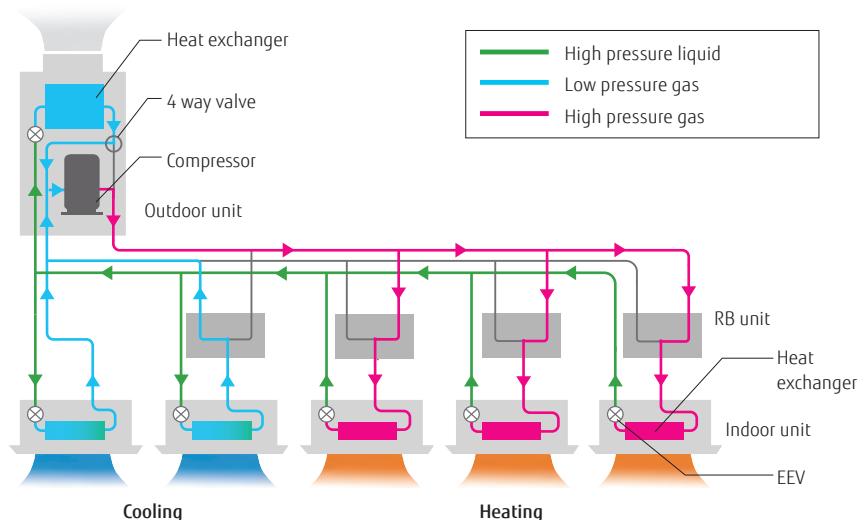



8,10,12HP : AJYA72GALH / AJYA90GALH / AJY108GALH  
14,16HP : AJY126GALH / AJY144GALH






### Dimensions

(Unit : mm)

#### 8, 10, 12 HP

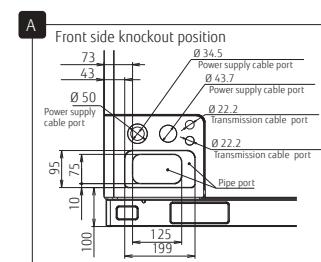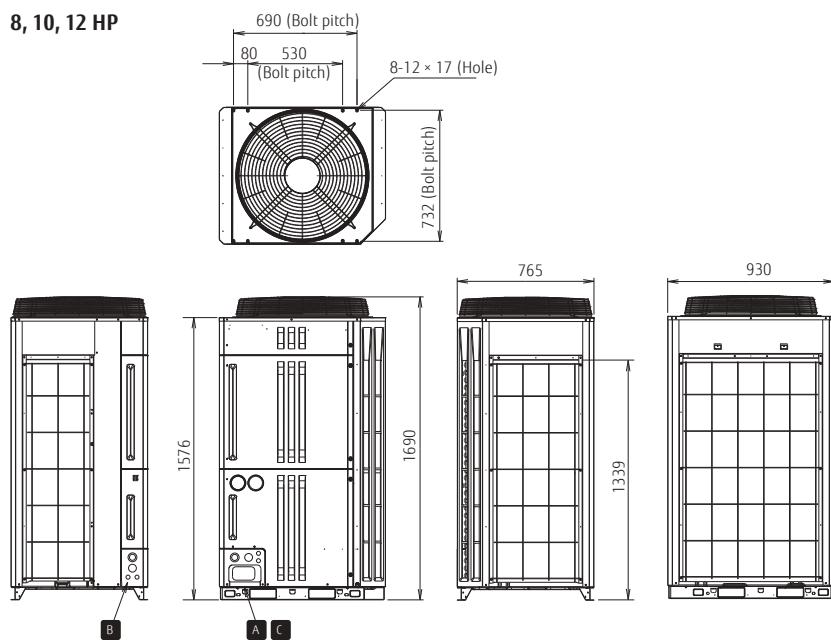

#### 14, 16 HP

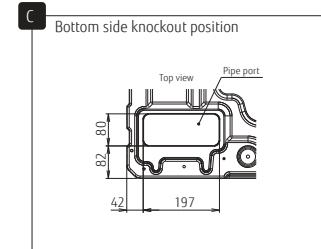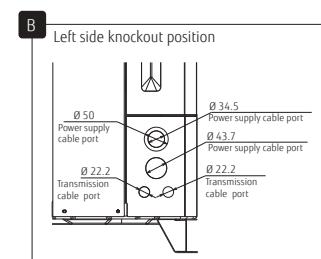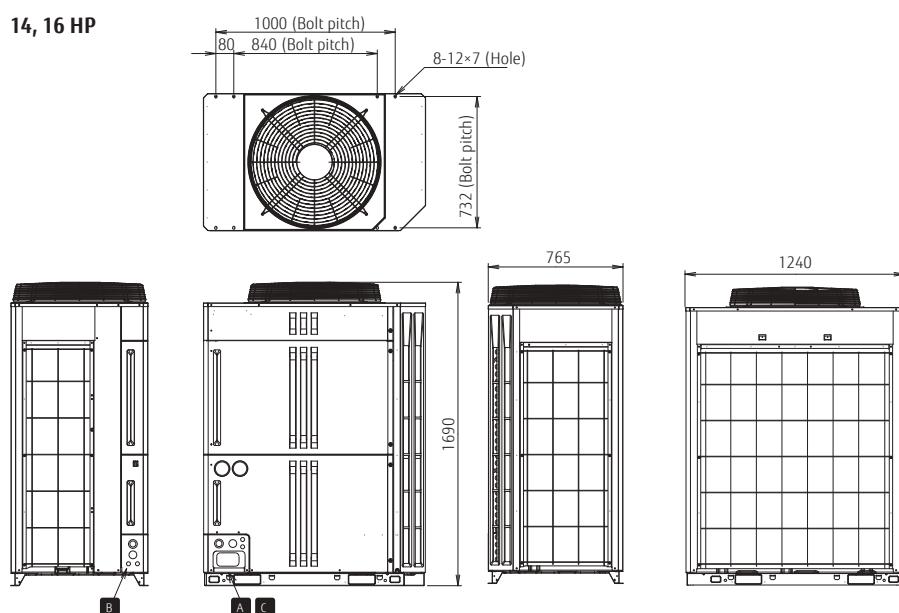

SPLIT

MULTI SPLIT

VRF

VENTILATION

OPTIONAL PARTS

AIR TO WATER

## PRODUCT LINEUP: VRF-AIRSTAGE™ V-Series

### Outdoor units specifications

#### Space Saving Combination

| Rating Capacity range               | HP                              | 8                            | 10            | 12            | 14            | 16            | 18            | 20              | 22              | 24              |                 |
|-------------------------------------|---------------------------------|------------------------------|---------------|---------------|---------------|---------------|---------------|-----------------|-----------------|-----------------|-----------------|
| Set Model name                      |                                 | AJY-A72GALH                  | AJY-A90GALH   | AJY-108GALH   | AJY-126GALH   | AJY-144GALH   | AJY-162GALH   | AJY-180GALH     | AJY-198GALH     | AJY-216GALH     |                 |
| Unit 1                              |                                 | AJY-A72GALH                  | AJY-A90GALH   | AJY-108GALH   | AJY-126GALH   | AJY-144GALH   | AJY-162GALH   | AJY-180GALH     | AJY-198GALH     | AJY-216GALH     |                 |
| Unit 2                              |                                 |                              |               |               |               |               |               |                 |                 |                 |                 |
| Unit 3                              |                                 |                              |               |               |               |               |               |                 |                 |                 |                 |
| Maximum Connectable Indoor Unit*    |                                 | 15                           | 16            | 17            | 21            | 24            | 27            | 30              | 32              | 35              |                 |
| Indoor unit connectable capacity    | kW                              | 11.2-33.6                    | 14.0-42.0     | 16.8-50.2     | 20.0-60.0     | 22.5-67.5     | 25.2-75.6     | 28.0-84.0       | 30.8-92.2       | 33.5-100.5      |                 |
| Power source                        |                                 | 3-phase 4 wire , 400 V, 50Hz |               |               |               |               |               |                 |                 |                 |                 |
| Capacity                            | Cooling                         | kW                           | 22.4          | 28.0          | 33.5          | 40.0          | 45.0          | 50.4            | 56.0            | 61.5            |                 |
|                                     | Heating                         |                              | 25.0          | 31.5          | 37.5          | 45.0          | 50.0          | 56.5            | 63.0            | 69.0            |                 |
| Input power                         | Cooling                         | kW                           | 5.45          | 7.11          | 9.75          | 11.34         | 13.61         | 12.56           | 14.22           | 16.86           |                 |
|                                     | Heating                         |                              | 5.70          | 7.33          | 9.62          | 10.90         | 12.77         | 13.03           | 14.66           | 16.95           |                 |
| EER                                 | Cooling                         | W/W                          | 4.11          | 3.94          | 3.44          | 3.53          | 3.31          | 4.01            | 3.94            | 3.65            |                 |
| COP                                 | Heating                         | W/W                          | 4.39          | 4.30          | 3.90          | 4.13          | 3.92          | 4.34            | 4.30            | 3.90            |                 |
| Airflow rate                        |                                 | m³/h                         | 11,100        | 11,100        | 11,100        | 13,000        | 13,000        | 11,100×2        | 11,100×2        | 11,100×2        |                 |
| Sound pressure level* <sup>2)</sup> | Cooling                         | dB(A)                        | 56 / 77       | 58 / 79       | 59 / 80       | 60 / 81       | 61 / 82       | 60 / 81         | 61 / 82         | 62 / 83         |                 |
|                                     | Heating                         |                              | 58 / 80       | 59 / 81       | 61 / 83       | 61 / 83       | 61 / 83       | 62 / 84         | 62 / 84         | 63 / 85         |                 |
| Maximum external static pressure    |                                 | Pa                           | 80            | 80            | 80            | 80            | 80            | 80              | 80              | 80              |                 |
| Compressor motor output             |                                 | kW                           | 7.5           | 7.5           | 7.5           | 11.0          | 11.0          | 7.5×2           | 7.5×2           | 7.5×2           |                 |
| Heat exchanger fin                  |                                 |                              | Blue fin        | Blue fin        | Blue fin        |                 |
| Net Dimensions                      | Height                          | mm                           | 1,690         | 1,690         | 1,690         | 1,690         | 1,690         | 1,690           | 1,690           | 1,690           |                 |
|                                     | Width                           |                              | 930           | 930           | 930           | 1,240         | 1,240         | 930×2           | 930×2           | 930×2           |                 |
|                                     | Depth                           |                              | 765           | 765           | 765           | 765           | 765           | 765             | 765             | 765             |                 |
| Weight                              |                                 | kg                           | 262           | 262           | 262           | 286           | 286           | 262×2           | 262×2           | 262×2           |                 |
| Refrigerant                         | Type (Global Warming Potential) |                              | R410A (2,088)   | R410A (2,088)   | R410A (2,088)   |                 |
|                                     | Charge                          | kg(CO <sub>2</sub> eq-T)     | 11.8 (24.6)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.8×2 (24.6×2) | 11.8×2 (24.6×2) | 11.8×2 (24.6×2) | 11.8×2 (24.6×2) |
| Connection pipe diameter            | Liquid                          | mm                           | 12.70         | 12.70         | 12.70         | 12.70         | 12.70         | 15.88           | 15.88           | 15.88           | 15.88           |
|                                     | Discharge Gas                   |                              | 15.88         | 19.05         | 19.05         | 22.22         | 22.22         | 22.22           | 28.58           | 28.58           | 28.58           |
|                                     | Suction Gas                     |                              | 22.22         | 22.22         | 28.58         | 28.58         | 28.58         | 28.58           | 34.92           | 34.92           | 34.92           |
| Operation range                     | Cooling                         | *CDB                         | -10 to 46       | -10 to 46       | -10 to 46       | -10 to 46       |
|                                     | Heating                         |                              | -20 to 21       | -20 to 21       | -20 to 21       | -20 to 21       |
|                                     | Cooling/Heating                 |                              | -10 to 21       | -10 to 21       | -10 to 21       | -10 to 21       |

#### Energy Efficiency Combination

| Rating Capacity range               | HP                              | 16                           | 22              | 24              | 26              | 28              | 30              |                 |
|-------------------------------------|---------------------------------|------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Set Model name                      |                                 | AJY-144GALHH                 | AJY-198GALHH    | AJY-216GALHH    | AJY-234GALHH    | AJY-252GALHH    | AJY-270GALHH    |                 |
| Unit 1                              |                                 | AJY-A72GALH                  | AJY-A72GALH     | AJY-A72GALH     | AJY-A90GALH     | AJY-A90GALH     | AJY-A90GALH     |                 |
| Unit 2                              |                                 |                              |                 |                 |                 |                 |                 |                 |
| Unit 3                              |                                 |                              |                 |                 |                 |                 |                 |                 |
| Maximum Connectable Indoor Unit*    |                                 | 24                           | 33              | 36              | 39              | 42              | 45              |                 |
| Indoor unit connectable capacity    | kW                              | 22.4-67.2                    | 31.2-93.6       | 33.6-100.8      | 36.4-109.2      | 39.2-117.6      | 42.0-126.0      |                 |
| Power source                        |                                 | 3-phase 4 wire , 400 V, 50Hz |                 |                 |                 |                 |                 |                 |
| Capacity                            | Cooling                         | kW                           | 44.8            | 62.4            | 67.2            | 72.8            | 78.4            | 84.0            |
|                                     | Heating                         |                              | 50.0            | 70.0            | 75.0            | 81.5            | 88.0            | 94.5            |
| Input power                         | Cooling                         | kW                           | 10.90           | 16.79           | 16.35           | 18.01           | 19.67           | 21.33           |
|                                     | Heating                         |                              | 11.40           | 16.60           | 17.10           | 18.73           | 20.36           | 21.99           |
| EER                                 | Cooling                         | W/W                          | 4.11            | 3.72            | 4.11            | 4.04            | 3.99            | 3.94            |
| COP                                 | Heating                         | W/W                          | 4.39            | 4.22            | 4.39            | 4.35            | 4.32            | 4.30            |
| Airflow rate                        |                                 | m³/h                         | 11,100×2        | 13,000+11,100   | 11,100×3        | 11,100×3        | 11,100×3        | 11,100×3        |
| Sound pressure level* <sup>2)</sup> | Cooling                         | dB(A)                        | 59 / 80         | 61 / 82         | 61 / 82         | 62 / 83         | 62 / 83         | 63 / 84         |
|                                     | Heating                         |                              | 61 / 83         | 63 / 85         | 63 / 85         | 63 / 85         | 63 / 85         | 64 / 86         |
| Maximum external static pressure    |                                 | Pa                           | 80              | 80              | 80              | 80              | 80              | 80              |
| Compressor motor output             |                                 | kW                           | 7.5×2           | 11.0+7.5        | 7.5×3           | 7.5×3           | 7.5×3           | 7.5×3           |
| Heat exchanger fin                  |                                 |                              | Blue fin        |
| Net Dimensions                      | Height                          | mm                           | 1,690           | 1,690           | 1,690           | 1,690           | 1,690           | 1,690           |
|                                     | Width                           |                              | 930×2           | 1,240+930       | 930×3           | 930×3           | 930×3           | 930×3           |
|                                     | Depth                           |                              | 765             | 765             | 765             | 765             | 765             | 765             |
| Weight                              |                                 | kg                           | 262×2           | 286+262         | 262×3           | 262×3           | 262×3           | 262×3           |
| Refrigerant                         | Type (Global Warming Potential) |                              | R410A (2,088)   |
|                                     | Charge                          | kg(CO <sub>2</sub> eq-T)     | 11.8×2 (24.6×2) | 11.8×2 (24.6×2) | 11.8×3 (24.6×3) | 11.8×3 (24.6×3) | 11.8×3 (24.6×3) | 11.8×3 (24.6×3) |
| Connection pipe diameter            | Liquid                          | mm                           | 12.70           | 15.88           | 15.88           | 15.88           | 15.88           | 19.05           |
|                                     | Discharge Gas                   |                              | 22.22           | 28.58           | 28.58           | 28.58           | 28.58           | 28.58           |
|                                     | Suction Gas                     |                              | 28.58           | 34.92           | 34.92           | 34.92           | 34.92           | 34.92           |
| Operation range                     | Cooling                         | *CDB                         | -10 to 46       |
|                                     | Heating                         |                              | -20 to 21       |
|                                     | Cooling/Heating                 |                              | -10 to 21       |

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating: Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.


When cooling operation will be conducted at outdoor air temperature below -5°C,  
the outdoor unit must be installed in a position that is higher than or equal to those of indoor units.

| 26                           | 28                       | 30                       | 32                       | 34                                     | 36                                     | 38                                     | 40                                     | 42                                     | 44                                     | 46                                     | 48                                     |
|------------------------------|--------------------------|--------------------------|--------------------------|--|--|--|--|--|--|--|--|
|                              |                          |                          |                          |  |  |  |  |  |  |  |  |
| AJY234GALH                   | AJY252GALH               | AJY270GALH               | AJY288GALH               | AJY306GALH                             | AJY324GALH                             | AJY342GALH                             | AJY360GALH                             | AJY378GALH                             | AJY396GALH                             | AJY414GALH                             | AJY432GALH                             |
| AJY144GALH<br>AJYA90GALH     | AJY144GALH<br>AJY108GALH | AJY144GALH<br>AJY126GALH | AJY144GALH<br>AJY144GALH | AJY108GALH<br>AJY108GALH<br>AJYA90GALH | AJY108GALH<br>AJY108GALH<br>AJY108GALH | AJY144GALH<br>AJY108GALH<br>AJY108GALH | AJY144GALH<br>AJY108GALH<br>AJY108GALH | AJY144GALH<br>AJY144GALH<br>AJY108GALH | AJY144GALH<br>AJY144GALH<br>AJY108GALH | AJY144GALH<br>AJY144GALH<br>AJY126GALH | AJY144GALH<br>AJY144GALH<br>AJY144GALH |
| 39                           | 42                       | 45                       | 48                       | 50                                     | 53                                     | 57                                     | 60                                     | 63                                     | 64                                     | 64                                     | 64                                     |
| 36.5-109.5                   | 39.3-117.7               | 42.5-127.5               | 45.0-135.0               | 47.5-142.5                             | 50.3-150.7                             | 53.3-159.7                             | 56.0-168.0                             | 59.0-177.0                             | 61.8-185.2                             | 65.0-195.0                             | 67.5-202.5                             |
| 3-phase 4 wire , 400 V, 50Hz |                          |                          |                          |  |  |  |  |  |  |  |  |
| 73.0                         | 78.5                     | 85.0                     | 90.0                     | 95.0                                   | 100.5                                  | 106.5                                  | 112.0                                  | 118.0                                  | 123.5                                  | 130.0                                  | 135.0                                  |
| 81.5                         | 87.5                     | 95.0                     | 100.0                    | 106.5                                  | 112.5                                  | 119.0                                  | 125.0                                  | 131.5                                  | 137.5                                  | 145.0                                  | 150.0                                  |
| 20.72                        | 23.36                    | 24.95                    | 27.22                    | 26.61                                  | 29.25                                  | 30.47                                  | 33.11                                  | 34.33                                  | 36.97                                  | 38.56                                  | 40.83                                  |
| 20.10                        | 22.39                    | 23.67                    | 25.54                    | 26.57                                  | 28.86                                  | 29.72                                  | 32.01                                  | 32.87                                  | 35.16                                  | 36.44                                  | 38.31                                  |
| 3.52                         | 3.36                     | 3.41                     | 3.31                     | 3.57                                   | 3.44                                   | 3.50                                   | 3.38                                   | 3.44                                   | 3.34                                   | 3.37                                   | 3.31                                   |
| 4.05                         | 3.91                     | 4.01                     | 3.92                     | 4.01                                   | 3.90                                   | 4.00                                   | 3.91                                   | 4.00                                   | 3.91                                   | 3.98                                   | 3.92                                   |
| 13,000+11,100                | 13,000+11,100            | 13,000×2                 | 13,000×2                 | 11,100×3                               | 11,100×3                               | 13,000+11,100×2                        | 13,000+11,100×2                        | 13,000+2+11,100                        | 13,000+2+11,100                        | 13,000+3                               | 13,000+3                               |
| 63 / 84                      | 63 / 84                  | 64 / 84.5                | 64 / 85                  | 63 / 85                                | 64 / 85                                | 64 / 85                                | 65 / 85.5                              | 65 / 86                                | 65 / 86                                | 65 / 86                                | 66 / 87                                |
| 63 / 85                      | 64 / 86                  | 64 / 86                  | 64 / 86                  | 65 / 87.2                              | 65 / 87                                | 65 / 87                                | 66 / 87.7                              | 65 / 87                                | 66 / 88                                | 66 / 88                                | 66 / 88                                |
| 80                           | 80                       | 80                       | 80                       | 80                                     | 80                                     | 80                                     | 80                                     | 80                                     | 80                                     | 80                                     | 80                                     |
| 11.0+7.5                     | 11.0+7.5                 | 11.0×2                   | 11.0×2                   | 7.5×3                                  | 7.5×3                                  | 11.0+7.5×2                             | 11.0+7.5×2                             | 11.0+2+7.5                             | 11.0+2+7.5                             | 11.0×3                                 | 11.0×3                                 |
| Blue fin                     | Blue fin                 | Blue fin                 | Blue fin                 | Blue fin                               | Blue fin                               | Blue fin                               | Blue fin                               | Blue fin                               | Blue fin                               | Blue fin                               | Blue fin                               |
| 1,690                        | 1,690                    | 1,690                    | 1,690                    | 1,690                                  | 1,690                                  | 1,690                                  | 1,690                                  | 1,690                                  | 1,690                                  | 1,690                                  | 1,690                                  |
| 1,240+930                    | 1,240+930                | 1,240×2                  | 1,240×2                  | 930×3                                  | 930×3                                  | 1,240+930×2                            | 1,240+930×2                            | 1,240+2+930                            | 1,240+2+930                            | 1,240×3                                | 1,240×3                                |
| 765                          | 765                      | 765                      | 765                      | 765                                    | 765                                    | 765                                    | 765                                    | 765                                    | 765                                    | 765                                    | 765                                    |
| 286+262                      | 286+262                  | 286×2                    | 286×2                    | 286×3                                  | 286×3                                  | 286+262×2                              | 286+262×2                              | 286+2+262                              | 286+2+262                              | 286×3                                  | 286×3                                  |
| R410A (2,088)                | R410A (2,088)            | R410A (2,088)            | R410A (2,088)            | R410A (2,088)                          | R410A (2,088)                          | R410A (2,088)                          | R410A (2,088)                          | R410A (2,088)                          | R410A (2,088)                          | R410A (2,088)                          | R410A (2,088)                          |
| 11.8×2 (24.6×2)              | 11.8×2 (24.6×2)          | 11.8×2 (24.6×2)          | 11.8×2 (24.6×2)          | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        |
| 15.88                        | 15.88                    | 19.05                    | 19.05                    | 19.05                                  | 19.05                                  | 19.05                                  | 19.05                                  | 19.05                                  | 19.05                                  | 19.05                                  | 19.05                                  |
| 28.58                        | 28.58                    | 28.58                    | 28.58                    | 28.58                                  | 28.58                                  | 34.92                                  | 34.92                                  | 34.92                                  | 34.92                                  | 34.92                                  | 34.92                                  |
| 34.92                        | 34.92                    | 34.92                    | 34.92                    | 34.92                                  | 41.27                                  | 41.27                                  | 41.27                                  | 41.27                                  | 41.27                                  | 41.27                                  | 41.27                                  |
| -10 to 46                    | -10 to 46                | -10 to 46                | -10 to 46                | -10 to 46                              | -10 to 46                              | -10 to 46                              | -10 to 46                              | -10 to 46                              | -10 to 46                              | -10 to 46                              | -10 to 46                              |
| -20 to 21                    | -20 to 21                | -20 to 21                | -20 to 21                | -20 to 21                              | -20 to 21                              | -20 to 21                              | -20 to 21                              | -20 to 21                              | -20 to 21                              | -20 to 21                              | -20 to 21                              |
| -10 to 21                    | -10 to 21                | -10 to 21                | -10 to 21                | -10 to 21                              | -10 to 21                              | -10 to 21                              | -10 to 21                              | -10 to 21                              | -10 to 21                              | -10 to 21                              | -10 to 21                              |

| 32                                     | 34                                     | 36                                     | 38                                     | 40                                     | 42                                     | 44                                     |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
| AJY288GALHH                            | AJY306GALHH                            | AJY324GALHH                            | AJY342GALHH                            | AJY360GALHH                            | AJY378GALHH                            | AJY396GALHH                            |
| AJY126GALH<br>AJYA90GALH<br>AJYA72GALH | AJY126GALH<br>AJYA90GALH<br>AJYA90GALH | AJY126GALH<br>AJY126GALH<br>AJYA72GALH | AJY126GALH<br>AJY126GALH<br>AJYA90GALH | AJY144GALH<br>AJY126GALH<br>AJYA90GALH | AJY126GALH<br>AJY126GALH<br>AJY126GALH | AJY144GALH<br>AJY144GALH<br>AJY126GALH |
| 48                                     | 51                                     | 54                                     | 57                                     | 60                                     | 64                                     | 64                                     |
| 45.2-135.6                             | 48.0-144.0                             | 51.2-153.6                             | 54.0-162.0                             | 56.5-169.5                             | 60.0-180.0                             | 62.5-187.5                             |
| 3-phase 4 wire , 400 V, 50Hz           |  |  |  |  |  |  |
| 90.4                                   | 96.0                                   | 102.4                                  | 108.0                                  | 113.0                                  | 120.0                                  | 125.0                                  |
| 101.5                                  | 108.0                                  | 115.0                                  | 121.5                                  | 126.5                                  | 135.0                                  | 140.0                                  |
| 23.90                                  | 25.56                                  | 28.13                                  | 29.79                                  | 32.06                                  | 34.02                                  | 36.29                                  |
| 23.93                                  | 25.56                                  | 27.50                                  | 29.13                                  | 31.00                                  | 32.70                                  | 34.57                                  |
| 3.78                                   | 3.76                                   | 3.64                                   | 3.63                                   | 3.52                                   | 3.53                                   | 3.44                                   |
| 4.24                                   | 4.23                                   | 4.18                                   | 4.17                                   | 4.08                                   | 4.13                                   | 4.05                                   |
| 13,000+11,100×2                        | 13,000+11,100×2                        | 13,000+2+11,100                        | 13,000+2+11,100                        | 13,000+2+11,100                        | 13,000+3                               | 13,000+3                               |
| 63 / 84                                | 64 / 85                                | 64 / 85                                | 64 / 86                                | 65 / 86                                | 65 / 86                                | 65 / 86                                |
| 64 / 86                                | 65 / 87                                | 65 / 87                                | 65 / 87                                | 65 / 87                                | 66 / 88                                | 66 / 88                                |
| 80                                     | 80                                     | 80                                     | 80                                     | 80                                     | 80                                     | 80                                     |
| 11.0+7.5×2                             | 11.0+7.5×2                             | 11.0+2+7.5                             | 11.0+2+7.5                             | 11.0+2+7.5                             | 11.0×3                                 | 11.0×3                                 |
| Blue fin                               |
| 1,690                                  | 1,690                                  | 1,690                                  | 1,690                                  | 1,690                                  | 1,690                                  | 1,690                                  |
| 1,240+930×2                            | 1,240+930×2                            | 1,240+2+930                            | 1,240+2+930                            | 1,240+2+930                            | 1,240×3                                | 1,240×3                                |
| 765                                    | 765                                    | 765                                    | 765                                    | 765                                    | 765                                    | 765                                    |
| 286+262×2                              | 286+262×2                              | 286+2+262                              | 286+2+262                              | 286+2+262                              | 286×3                                  | 286×3                                  |
| R410A (2,088)                          |
| 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        | 11.8×3 (24.6×3)                        |
| 19.05                                  | 19.05                                  | 19.05                                  | 19.05                                  | 19.05                                  | 19.05                                  | 19.05                                  |
| 28.58                                  | 28.58                                  | 28.58                                  | 34.92                                  | 34.92                                  | 34.92                                  | 34.92                                  |
| 34.92                                  | 34.92                                  | 41.27                                  | 41.27                                  | 41.27                                  | 41.27                                  | 41.27                                  |
| -10 to 46                              |
| -20 to 21                              |
| -10 to 21                              |

\*1: Minimum connectable indoor unit number is 2.

\*2: The noise value is the value when measured in an anechoic room. When measured in the actual installed state, surrounding noise and reflections are received and the measured value is usually larger than the indicated value.




## PRODUCT LINEUP: VRF-AIRSTAGE™ V-Series




### Efficiency in actual operation

Top class high COP is achieved for all combinations by our unique heat exchanger structure, high efficient DC twin compressor, and our own technologies.

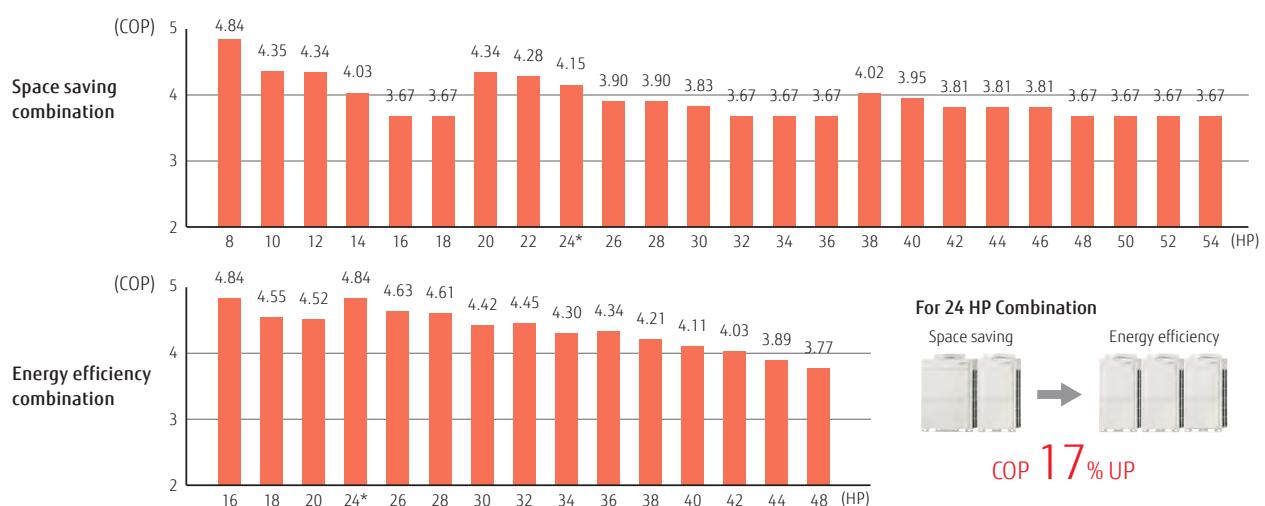

### System configuration example

- This system is used for medium-sized and large buildings. Connecting each outdoor unit makes it possible to create a highcapacity system.
- Connection of multiple indoor units using separation tubes and headers.

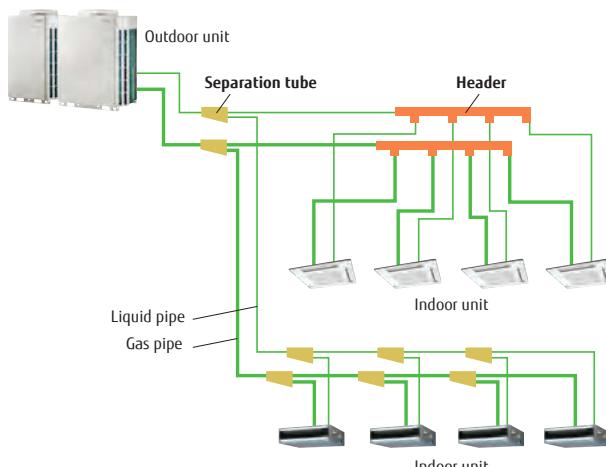

8,10HP: AJY072LALBH / AJY090LALBH  
 12,14,16,18HP: AJY108LALBH / AJY126LALBH / AJY144LALBH / AJY162LALBH



8, 10 HP





12, 14, 16, 18 HP




### Dimensions

(Unit : mm)

#### 8, 10 HP

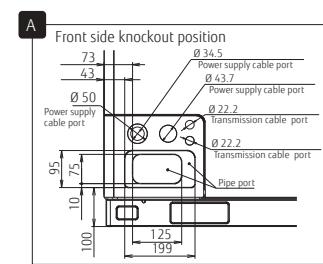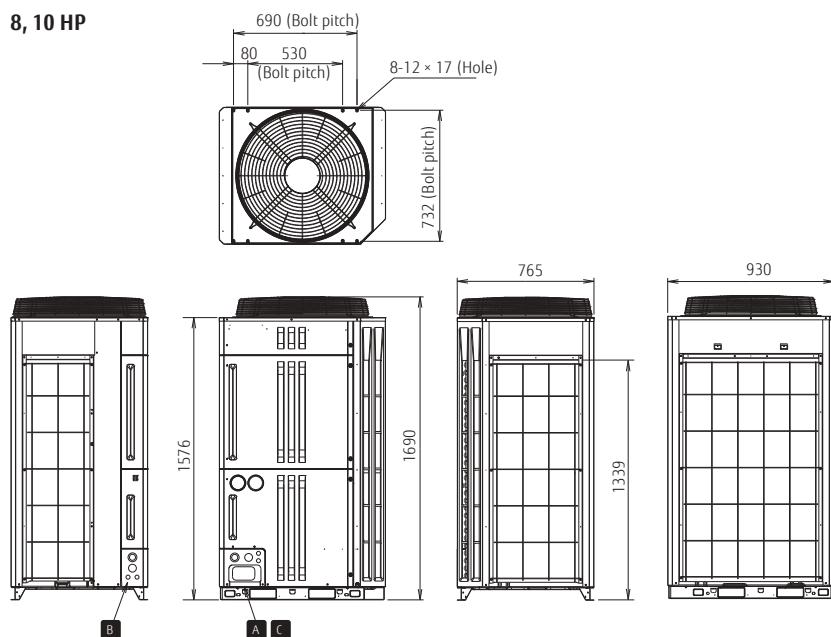

#### 12, 14, 16, 18 HP

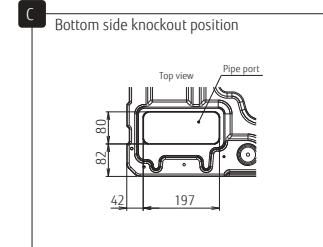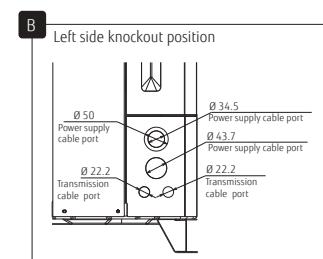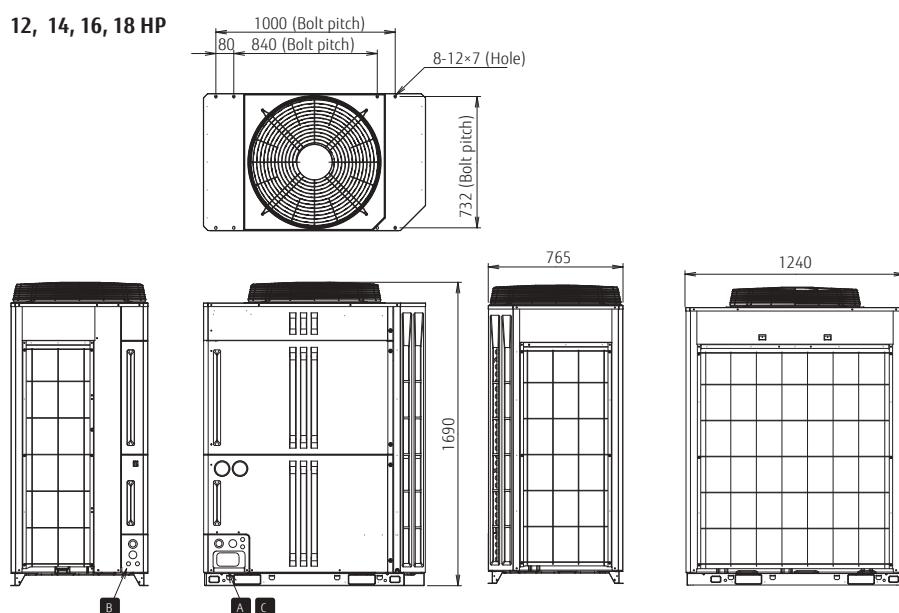

SPLIT

MULTI SPLIT

VRF

VENTILATION

OPTIONAL PARTS

AIR TO WATER



## PRODUCT LINEUP: VRF-AIRSTAGE™ V-Series

### Outdoor units specifications

#### Space Saving Combination

| Rating Capacity range                            | HP                              | 8                           | 10            | 12            | 14            | 16            | 18            | 20            | 22              | 24                    | 26                    | 28                    |                       |
|--|---------------------------------|-----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|-----------------|-----------------------|-----------------------|-----------------------|-----------------------|
|  |                                 |                             |               |               |               |               |               |               |                 |                       |                       |                       |                       |
| Set Model name                                   |                                 | AJY072LALBH                 | AJY090LALBH   | AJY108LALBH   | AJY126LALBH   | AJY144LALBH   | AJY162LALBH   | AJY180LALBH   | AJY198LALBH     | AJY216LALBH           | AJY234LALBH           | AJY252LALBH           |                       |
| Unit 1   |                                 | AJY072LALBH                 | AJY090LALBH   | AJY108LALBH   | AJY126LALBH   | AJY144LALBH   | AJY162LALBH   | AJY180LALBH   | AJY198LALBH     | AJY216LALBH           | AJY234LALBH           | AJY252LALBH           |                       |
| Unit 2   |                                 |                             |               |               |               |               |               |               |                 |                       |                       |                       |                       |
| Unit 3   |                                 |                             |               |               |               |               |               |               |                 |                       |                       |                       |                       |
| Maximum Connectable Indoor Unit*                 |                                 | 17                          | 21            | 26            | 30            | 34            | 39            | 43            | 47              | 52                    | 56                    | 60                    |                       |
| Indoor unit connectable capacity                 | kW                              | 11.2-33.6                   | 14.0-42.0     | 16.8-50.2     | 20.0-60.0     | 22.5-67.5     | 25.0-67.5     | 28.0-84.0     | 31.2-93.6       | 34.0-102.0            | 36.5-109.5            | 39.0-109.5            |                       |
| Power source                                     |                                 | 3-phase 4 wire, 400 V, 50Hz |               |               |               |               |               |               |                 |                       |                       |                       |                       |
| Capacity   | Cooling                         | kW                          | 22.4          | 28.0          | 33.5          | 40.0          | 45.0          | 50.0          | 56.0            | 62.4                  | 68.0                  | 73.0                  | 78.0                  |
|  | Heating                         |                             | 25.0          | 31.5          | 37.5          | 45.0          | 50.0          | 50.0          | 63.0            | 70.0                  | 76.5                  | 81.5                  | 81.5                  |
| Input power                                      | Cooling                         | kW                          | 5.20          | 7.28          | 8.96          | 10.96         | 13.01         | 16.56         | 14.56           | 16.16                 | 18.24                 | 20.29                 | 23.84                 |
|  | Heating                         |                             | 5.17          | 7.25          | 8.65          | 11.17         | 13.63         | 13.63         | 14.50           | 16.34                 | 18.42                 | 20.88                 | 20.88                 |
| EER  | Cooling                         | W/W                         | 4.31          | 3.85          | 3.74          | 3.65          | 3.46          | 3.02          | 3.85            | 3.86                  | 3.73                  | 3.60                  | 3.27                  |
| COP  | Heating                         | W/W                         | 4.84          | 4.35          | 4.34          | 4.03          | 3.67          | 3.67          | 4.34            | 4.28                  | 4.15                  | 3.90                  | 3.90                  |
| Airflow rate                                     | High                            | m³/h                        | 11,100        | 11,100        | 13,000        | 13,000        | 13,700        | 13,700        | 11,100×2        | 13,000+11,100         | 13,000+11,100         | 13,000+11,100         | 13,700+11,100         |
| Sound pressure level* <sup>2</sup> / Power level | Cooling                         | dB(A)                       | 56 / 77       | 58 / 79       | 57 / 78       | 60 / 81       | 62 / 83       | 63 / 84       | 61 / 82         | 61 / 82               | 62 / 83               | 63 / 84               | 64 / 85               |
|  | Heating                         |                             | 58 / 80       | 59 / 81       | 60 / 83       | 62 / 84       | 64 / 86       | 64 / 86       | 62 / 84         | 63 / 85               | 64 / 86               | 65 / 87               | 65 / 87               |
| Maximum external static pressure                 | Pa                              | 82                          | 82            | 82            | 82            | 82            | 82            | 82            | 82              | 82                    | 82                    | 82                    |                       |
| Compressor motor output                          | kW                              | 7.5                         | 7.5           | 11.0          | 11.0          | 11.0          | 11.0          | 7.5×2         | 11.0+7.5        | 11.0+7.5              | 11.0+7.5              | 11.0+7.5              |                       |
| Heat exchanger fin                               |                                 | Blue fin                    | Blue fin      | Blue fin      | Blue fin      | Blue fin      | Blue fin      | Blue fin      | Blue fin        | Blue fin              | Blue fin              | Blue fin              |                       |
| Net Dimensions                                   | Height                          | mm                          | 1,690         | 1,690         | 1,690         | 1,690         | 1,690         | 1,690         | 1,690           | 1,690                 | 1,690                 | 1,690                 | 1,690                 |
|  | Width                           |                             | 930           | 930           | 1,240         | 1,240         | 1,240         | 1,240         | 930×2           | 1,240+930             | 1,240+930             | 1,240+930             | 1,240+930             |
|  | Depth                           |                             | 765           | 765           | 765           | 765           | 765           | 765           | 765             | 765                   | 765                   | 765                   | 765                   |
| Weight   |                                 | kg                          | 252           | 252           | 275           | 275           | 275           | 275           | 252×2           | 275+252               | 275+252               | 275+252               | 275+252               |
| Refrigerant                                      | Type (Global Warming Potential) | R410A (2,088)               | R410A (2,088) | R410A (2,088) | R410A (2,088) | R410A (2,088) | R410A (2,088) | R410A (2,088) | R410A (2,088)   | R410A (2,088)         | R410A (2,088)         | R410A (2,088)         |                       |
|  | Charge                          | kg(CO <sub>2</sub> eq-T)    | 11.7 (24.4)   | 11.7 (24.4)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.7×2 (24.4×2) | 11.8+11.7 (24.6+24.4) | 11.8+11.7 (24.6+24.4) | 11.8+11.7 (24.6+24.4) | 11.8+11.7 (24.6+24.4) |
| Connection pipe diameter                         | Liquid                          | mm                          | 12.70         | 12.70         | 12.70         | 12.70         | 12.70         | 15.88         | 15.88           | 15.88                 | 15.88                 | 15.88                 | 15.88                 |
|  | Gas                             |                             | 22.22         | 22.22         | 28.58         | 28.58         | 28.58         | 28.58         | 28.58           | 34.92                 | 34.92                 | 34.92                 | 34.92                 |
| Operation range                                  | Cooling                         | *CDB                        | -15 to 46     | -5 to 46        | -5 to 46              | -5 to 46              | -5 to 46              | -5 to 46              |
|  | Heating                         |                             | -20 to 21       | -20 to 21             | -20 to 21             | -20 to 21             | -20 to 21             |

#### Energy Efficiency Combination

| Rating Capacity range                            | HP                              | 16                          | 18              | 20              | 24                    | 26              | 28              | 30                        |                           |           |  |  |
|--|---------------------------------|-----------------------------|-----------------|-----------------|-----------------------|-----------------|-----------------|---------------------------|---------------------------|-----------|--|--|
|  |                                 |                             |                 |                 |                       |                 |                 |                           |                           |           |  |  |
| Set Model name                                   |                                 | AJY144LALBHH                | AJY162LALBHH    | AJY180LALBHH    | AJY216LALBHH          | AJY234LALBHH    | AJY252LALBHH    | AJY270LALBHH              |                           |           |  |  |
| Unit 1   |                                 | AJY072LALBH                 | AJY090LALBH     | AJY108LALBH     | AJY126LALBH           | AJY144LALBH     | AJY162LALBH     | AJY180LALBH               |                           |           |  |  |
| Unit 2   |                                 |                             |                 |                 |                       |                 |                 |                           |                           |           |  |  |
| Unit 3   |                                 |                             |                 |                 |                       |                 |                 |                           |                           |           |  |  |
| Maximum Connectable Indoor Unit*                 |                                 | 34                          | 39              | 43              | 52                    | 56              | 60              | 64                        |                           |           |  |  |
| Indoor unit connectable capacity                 | kW                              | 22.4-67.2                   | 25.2-75.6       | 28.0-83.8       | 33.6-100.8            | 36.4-109.2      | 39.2-117.4      | 42.4-127.2                |                           |           |  |  |
| Power source                                     |                                 | 3-phase 4 wire, 400 V, 50Hz |                 |                 |                       |                 |                 |                           |                           |           |  |  |
| Capacity   | Cooling                         | kW                          | 44.8            | 50.4            | 55.9                  | 67.2            | 72.8            | 78.3                      | 84.8                      |           |  |  |
|  | Heating                         |                             | 50.0            | 56.5            | 62.5                  | 75.0            | 81.5            | 87.5                      | 95.0                      |           |  |  |
| Input power                                      | Cooling                         | kW                          | 10.40           | 12.48           | 14.16                 | 15.60           | 17.68           | 19.36                     | 21.36                     |           |  |  |
|  | Heating                         |                             | 10.34           | 12.42           | 13.82                 | 15.51           | 17.59           | 18.99                     | 21.51                     |           |  |  |
| EER  | Cooling                         | W/W                         | 4.31            | 4.04            | 3.95                  | 4.31            | 4.12            | 4.04                      | 3.97                      |           |  |  |
| COP  | Heating                         | W/W                         | 4.84            | 4.55            | 4.52                  | 4.84            | 4.63            | 4.61                      | 4.42                      |           |  |  |
| Airflow rate                                     | High                            | m³/h                        | 11,100×2        | 11,100×2        | 13,000+11,100         | 11,100×3        | 11,000×3        | 13,000+11,100×2           | 13,000+11,100×2           |           |  |  |
| Sound pressure level* <sup>2</sup> / Power level | Cooling                         | dB(A)                       | 59 / 80         | 60 / 81         | 60 / 81               | 61 / 82         | 62 / 83         | 61 / 82                   | 63 / 84                   |           |  |  |
|  | Heating                         |                             | 61 / 83         | 62 / 84         | 62 / 85               | 63 / 85         | 63 / 85         | 64 / 86                   | 65 / 87                   |           |  |  |
| Maximum external static pressure                 | Pa                              | 82                          | 82              | 82              | 82                    | 82              | 82              | 82                        | 82                        |           |  |  |
| Compressor motor output                          | kW                              | 7.5×2                       | 7.5×2           | 11.0+7.5        | 7.5×3                 | 7.5×3           | 11.0+7.5×2      | 11.0+7.5×2                |                           |           |  |  |
| Heat exchanger fin                               |                                 | Blue fin                    | Blue fin        | Blue fin        | Blue fin              | Blue fin        | Blue fin        | Blue fin                  |                           |           |  |  |
| Net Dimensions                                   | Height                          | mm                          | 1,690           | 1,690           | 1,690                 | 1,690           | 1,690           | 1,690                     | 1,690                     |           |  |  |
|  | Width                           |                             | 930×2           | 930×2           | 1,240+930             | 930×3           | 930×3           | 1,240+930×2               | 1,240+930×2               |           |  |  |
|  | Depth                           |                             | 765             | 765             | 765                   | 765             | 765             | 765                       | 765                       |           |  |  |
| Weight   |                                 | kg                          | 252×2           | 252×2           | 275+252               | 275+252         | 252×3           | 252×3                     | 275+252×2                 | 275+252×2 |  |  |
| Refrigerant                                      | Type (Global Warming Potential) | R410A (2,088)               | R410A (2,088)   | R410A (2,088)   | R410A (2,088)         | R410A (2,088)   | R410A (2,088)   | R410A (2,088)             |                           |           |  |  |
|  | Charge                          | kg(CO <sub>2</sub> eq-T)    | 11.7×2 (24.4×2) | 11.7×2 (24.4×2) | 11.8+11.7 (24.6+24.4) | 11.7×3 (24.4×3) | 11.7×3 (24.4×3) | 11.8+11.7×2 (24.6+24.4×2) | 11.8+11.7×2 (24.6+24.4×2) |           |  |  |
| Connection pipe diameter                         | Liquid                          | mm                          | 12.70           | 15.88           | 15.88                 | 15.88           | 15.88           | 15.88                     | 15.88                     |           |  |  |
|  | Gas                             |                             | 28.58           | 28.58           | 28.58                 | 34.92           | 34.92           | 34.92                     | 34.92                     |           |  |  |
| Operation range                                  | Cooling                         | *CDB                        | -5 to 46        | -5 to 46        | -5 to 46              | -5 to 46        | -5 to 46        | -5 to 46                  | -5 to 46                  |           |  |  |
|  | Heating                         |                             | -20 to 21       | -20 to 21       | -20 to 21             | -20 to 21       | -20 to 21       | -20 to 21                 | -20 to 21                 |           |  |  |

Note : Specifications are based on the following conditions.


Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.

When cooling operation will be conducted at outdoor air temperature below -5°C,

the outdoor unit must be installed in a position that is higher than or equal to those of indoor units.




| 30                          | 32                         | 34                         | 36                         | 38                         | 40                         | 42                         | 44                         | 46                         | 48                         | 50                         | 52                         | 54                         |                 |
|-----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|-----------------|
|                             |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |                 |
| AJY270LALBH                 | AJY288LALBH                | AJY306LALBH                | AJY324LALBH                | AJY342LALBH                | AJY360LALBH                | AJY378LALBH                | AJY396LALBH                | AJY414LALBH                | AJY432LALBH                | AJY450LALBH                | AJY468LALBH                | AJY486LALBH                |                 |
| AJY144LALBH<br>AJY126LALBH  | AJY144LALBH<br>AJY144LALBH | AJY162LALBH<br>AJY144LALBH | AJY162LALBH<br>AJY162LALBH | AJY162LALBH<br>AJY090LALBH | AJY144LALBH<br>AJY126LALBH | AJY144LALBH<br>AJY144LALBH | AJY162LALBH<br>AJY090LALBH | AJY162LALBH<br>AJY090LALBH | AJY144LALBH<br>AJY144LALBH | AJY162LALBH<br>AJY162LALBH | AJY162LALBH<br>AJY162LALBH | AJY162LALBH<br>AJY162LALBH |                 |
| 64                          | 64                         | 64                         | 64                         | 64                         | 64                         | 64                         | 64                         | 64                         | 64                         | 64                         | 64                         | 64                         |                 |
| 42.5-127.5                  | 45.0-135.0                 | 47.5-135.0                 | 50.0-135.0                 | 53.0-151.5                 | 56.5-169.5                 | 59.0-177.0                 | 61.5-177.0                 | 64.0-177.0                 | 67.5-202.5                 | 70.0-202.5                 | 72.5-202.5                 | 75.0-202.5                 |                 |
| 3-phase 4 wire, 400 V, 50Hz |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |                 |
| 85.0                        | 90.0                       | 95.0                       | 100.0                      | 106.0                      | 113.0                      | 118.0                      | 123.0                      | 128.0                      | 135.0                      | 140.0                      | 145.0                      | 150.0                      |                 |
| 95.0                        | 100.0                      | 100.0                      | 100.0                      | 113.0                      | 126.5                      | 131.5                      | 131.5                      | 131.5                      | 150.0                      | 150.0                      | 150.0                      | 150.0                      |                 |
| 23.97                       | 26.02                      | 29.57                      | 33.12                      | 31.12                      | 31.25                      | 33.30                      | 36.85                      | 40.40                      | 39.03                      | 42.58                      | 46.13                      | 49.68                      |                 |
| 24.80                       | 27.26                      | 27.26                      | 28.13                      | 32.05                      | 34.51                      | 34.51                      | 40.89                      | 40.89                      | 40.89                      | 40.89                      | 40.89                      | 40.89                      |                 |
| 3.55                        | 3.46                       | 3.21                       | 3.02                       | 3.41                       | 3.62                       | 3.54                       | 3.34                       | 3.17                       | 3.46                       | 3.29                       | 3.14                       | 3.02                       |                 |
| 3.83                        | 3.67                       | 3.67                       | 3.67                       | 4.02                       | 3.95                       | 3.81                       | 3.81                       | 3.81                       | 3.67                       | 3.67                       | 3.67                       | 3.67                       |                 |
| 13,700+13,000               | 13,700×2                   | 13,700×2                   | 13,700×2                   | 13,700+11,100×2            | 13,700+13,000+11,100       | 13,700×2+11,100            | 13,700×2+11,100            | 13,700+2+11,100            | 13,700+3                   | 13,700×3                   | 13,700×3                   | 13,700×3                   |                 |
| 64 / 85                     | 65 / 88                    | 66 / 87                    | 66 / 87                    | 65 / 86                    | 65 / 86                    | 66 / 87                    | 66 / 87                    | 67 / 87                    | 67 / 88                    | 67 / 88                    | 68 / 89                    | 68 / 89                    |                 |
| 66 / 88                     | 67 / 89                    | 67 / 89                    | 67 / 89                    | 66 / 88                    | 67 / 89                    | 68 / 90                    | 68 / 90                    | 69 / 91                    | 69 / 91                    | 69 / 91                    | 69 / 91                    | 69 / 91                    |                 |
| 82                          | 82                         | 82                         | 82                         | 82                         | 82                         | 82                         | 82                         | 82                         | 82                         | 82                         | 82                         | 82                         |                 |
| 11.0×2                      | 11.0×2                     | 11.0×2                     | 11.0×2                     | 11.0+7.5×2                 | 11.0×2+7.5                 | 11.0×2+7.5                 | 11.0×2+7.5                 | 11.0×2+7.5                 | 11.0×3                     | 11.0×3                     | 11.0×3                     | 11.0×3                     |                 |
| Blue fin                    | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   |                 |
| 1,690                       | 1,690                      | 1,690                      | 1,690                      | 1,690                      | 1,690                      | 1,690                      | 1,690                      | 1,690                      | 1,690                      | 1,690                      | 1,690                      | 1,690                      |                 |
| 1,240×2                     | 1,240×2                    | 1,240×2                    | 1,240×2                    | 1,240+930×2                | 1,240×2+930                | 1,240×2+930                | 1,240×2+930                | 1,240×3                    | 1,240×3                    | 1,240×3                    | 1,240×3                    | 1,240×3                    |                 |
| 765                         | 765                        | 765                        | 765                        | 765                        | 765                        | 765                        | 765                        | 765                        | 765                        | 765                        | 765                        | 765                        |                 |
| 275×2                       | 275×2                      | 275×2                      | 275×2                      | 275+252×2                  | 275×2+252                  | 275×2+252                  | 275×2+252                  | 275×3                      | 275×3                      | 275×3                      | 275×3                      | 275×3                      |                 |
| R410A (2,088)               | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              |                 |
| 11.8×2 (24.6×2)             | 11.8×2 (24.6×2)            | 11.8×2 (24.6×2)            | 11.8×2 (24.6×2)            | 11.8+11.7×2 (24.6+24.4×2)  | 11.8×2+11.7 (24.6×2+24.4)  | 11.8×2+11.7 (24.6×2+24.4)  | 11.8×2+11.7 (24.6×2+24.4)  | 11.8×3 (24.6×3)            | 11.8×3 (24.6×3)            | 11.8×3 (24.6×3)            | 11.8×3 (24.6×3)            | 11.8×3 (24.6×3)            | 11.8×3 (24.6×3) |
| 19.05                       | 19.05                      | 19.05                      | 19.05                      | 19.05                      | 19.05                      | 19.05                      | 19.05                      | 19.05                      | 19.05                      | 19.05                      | 19.05                      | 19.05                      |                 |
| 34.92                       | 34.92                      | 34.92                      | 41.27                      | 41.27                      | 41.27                      | 41.27                      | 41.27                      | 41.27                      | 41.27                      | 41.27                      | 41.27                      | 41.27                      |                 |
| -5 to 46                    | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                   |                 |
| -20 to 21                   | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  |                 |

| 32  | 34  | 36                         | 38                         | 40                         | 42                         | 44  | 46  |
|---|---|----------------------------|----------------------------|----------------------------|----------------------------|---|---|
|   |   |                            |                            |                            |                            |   |   |
| AJY288LALBHH                              | AJY306LALBHH                              | AJY324LALBHH               | AJY342LALBHH               | AJY360LALBHH               | AJY378LALBHH               | AJY396LALBHH                              | AJY414LALBHH                              |
| AJY108LALBH<br>AJY108LALBH<br>AJY072LALBH | AJY126LALBH<br>AJY108LALBH<br>AJY108LALBH | AJY108LALBH<br>AJY108LALBH | AJY126LALBH<br>AJY108LALBH | AJY126LALBH<br>AJY108LALBH | AJY126LALBH<br>AJY108LALBH | AJY144LALBH<br>AJY126LALBH<br>AJY126LALBH | AJY144LALBH<br>AJY126LALBH<br>AJY126LALBH |
| 64  | 64  |                            |                            | 64                         | 64                         | 64  | 64  |
| 44.7-134.1                                | 48.0-143.8                                | 50.3-150.7                 | 53.5-160.5                 | 56.8-170.2                 | 60.0-180.0                 | 62.5-187.5                                | 65.0-195.0                                |
| 3-phase 4 wire, 400 V, 50Hz               |   |                            |                            |                            |                            |   |   |
| 89.4                                      | 95.9                                      | 100.5                      | 107.0                      | 113.5                      | 120.0                      | 125.0                                     | 130.0                                     |
| 100.0                                     | 107.5                                     | 112.5                      | 120.0                      | 127.5                      | 135.0                      | 140.0                                     | 145.0                                     |
| 23.12                                     | 25.12                                     | 26.88                      | 28.88                      | 30.88                      | 32.88                      | 34.93                                     | 36.98                                     |
| 22.47                                     | 24.99                                     | 25.95                      | 28.47                      | 30.99                      | 33.51                      | 35.97                                     | 38.43                                     |
| 3.87                                      | 3.82                                      | 3.74                       | 3.70                       | 3.68                       | 3.65                       | 3.58                                      | 3.52                                      |
| 4.45                                      | 4.30                                      | 4.34                       | 4.21                       | 4.11                       | 4.03                       | 3.89                                      | 3.77                                      |
| 13,000×2+11,100                           | 13,000×2+11,100                           | 13,000×3                   | 13,000×3                   | 13,000×3                   | 13,000×3                   | 13,700+13,000×2                           | 13,700+2+13,000                           |
| 61 / 82                                   | 63 / 84                                   | 63 / 83                    | 64 / 84                    | 64 / 85                    | 65 / 88                    | 66 / 87                                   | 66 / 87                                   |
| 64 / 87                                   | 65 / 88                                   | 65 / 88                    | 65 / 88                    | 66 / 88                    | 67 / 89                    | 68 / 90                                   | 68 / 90                                   |
| 82  | 82  | 82                         | 82                         | 82                         | 82                         | 82  | 82  |
| 11.0×2+7.5                                | 11.0×2+7.5                                | 11.0×3                     | 11.0×3                     | 11.0×3                     | 11.0×3                     | 11.0×3                                    | 11.0×3                                    |
| Blue fin                                  | Blue fin                                  | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                                  | Blue fin                                  |
| 1,690                                     | 1,690                                     | 1,690                      | 1,690                      | 1,690                      | 1,690                      | 1,690                                     | 1,690                                     |
| 1,240×2+930                               | 1,240×2+930                               | 1,240×3                    | 1,240×3                    | 1,240×3                    | 1,240×3                    | 1,240×3                                   | 1,240×3                                   |
| 765                                       | 765                                       | 765                        | 765                        | 765                        | 765                        | 765                                       | 765                                       |
| 275×2+252                                 | 275×2+252                                 | 275×3                      | 275×3                      | 275×3                      | 275×3                      | 275×3                                     | 275×3                                     |
| R410A (2,088)                             | R410A (2,088)                             | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)                             | R410A (2,088)                             |
| 11.8×2+11.7 (24.6×2+24.4)                 | 11.8×2+11.7 (24.6×2+24.4)                 | 11.8×3 (24.6×3)            | 11.8×3 (24.6×3)            | 11.8×3 (24.6×3)            | 11.8×3 (24.6×3)            | 11.8×3 (24.6×3)                           | 11.8×3 (24.6×3)                           |
| 19.05                                     | 19.05                                     | 19.05                      | 19.05                      | 19.05                      | 19.05                      | 19.05                                     | 19.05                                     |
| 34.92                                     | 34.92                                     | 41.27                      | 41.27                      | 41.27                      | 41.27                      | 41.27                                     | 41.27                                     |
| -5 to 46                                  | -5 to 46                                  | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                                  | -5 to 46                                  |
| -20 to 21                                 | -20 to 21                                 | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                                 | -20 to 21                                 |

\*1 Minimum connectable indoor unit number is 2.  
However ARXC72 and ARXC90 can be used signal connection.  
\*2 The noise value is the value when measured in an anechoic room.

When measured in the actual installed state, surrounding noise and reflections are received and the measured value is usually larger than the indicated value.



## PRODUCT LINEUP: VRF-AIRSTAGE™ V-Series


### Heat Pump Modular Type

AIRSTAGE™ V-III



### Efficiency in actual operation

Top class high COP is achieved for all combinations by our unique heat exchanger structure, high efficient DC twin compressor, and our own technologies.

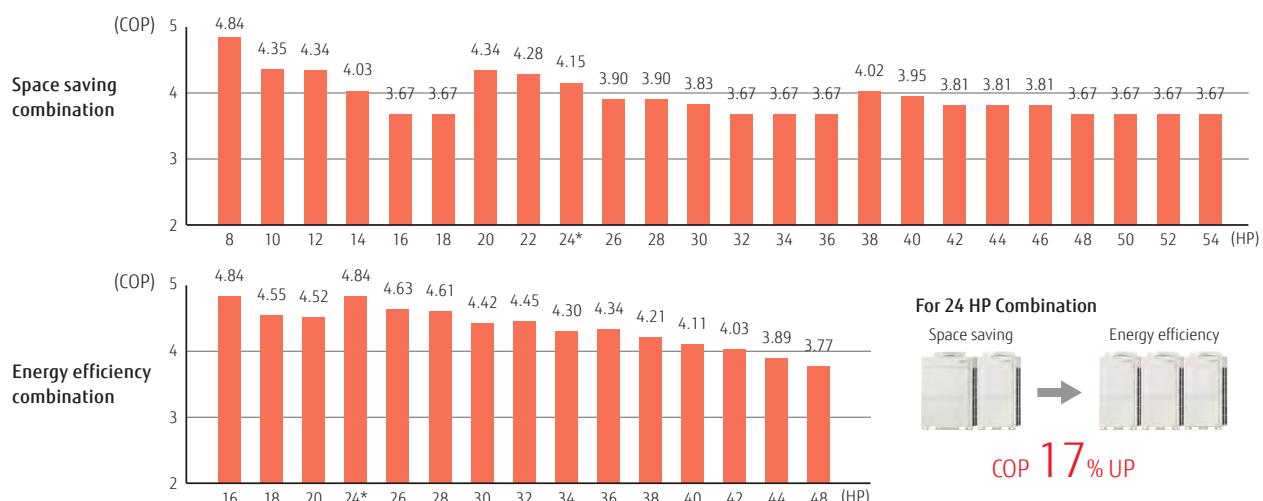

### Heavy anti-corrosion treatment design

#### Anti-corrosion coated casing parts

Satisfies the JRA\* heavy anti-corrosion regulation(4002)  
\*JRA: Japan Refrigeration Association

#### PCB and Electronic components

High ambient temperature compatible electric components. Added silicon coating on all PCB circuits for anti-corrosion.

#### Blue fin heat exchanger

Hydrophilic coating  
Cobalt Blue protection  
Aluminum base material  
Cobalt Blue protection  
Hydrophilic coating

#### High ambient & corrosion compatible

PCB components  
Refrigerant cycle component


#### All screws and hinges

Added zinc chrome acid film treatment.



### High ambient operation design

Possible to operate cooling up to 52°C outdoor temperature by adopting DC fan motor, large propeller fan and large heat exchanger.

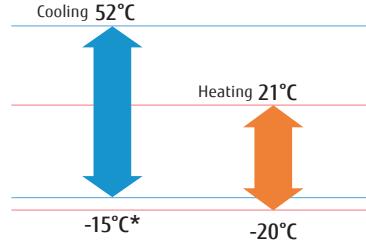

\*: When a multiple outdoor unit connection is used, operating range is from -5°C to 52°C in cooling.

8,10HP : AJY072LNLBH / AJY090LNLBH  
 12,14,16,18HP : AJY108LNLBH / AJY126LNLBH / AJY144LNLBH / AJY162LNLBH



8, 10 HP





12, 14, 16, 18 HP




### Dimensions

(Unit : mm)

#### 8, 10 HP

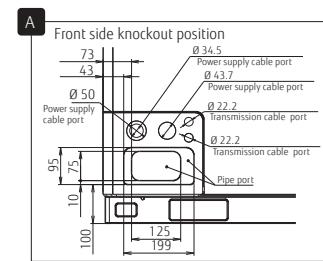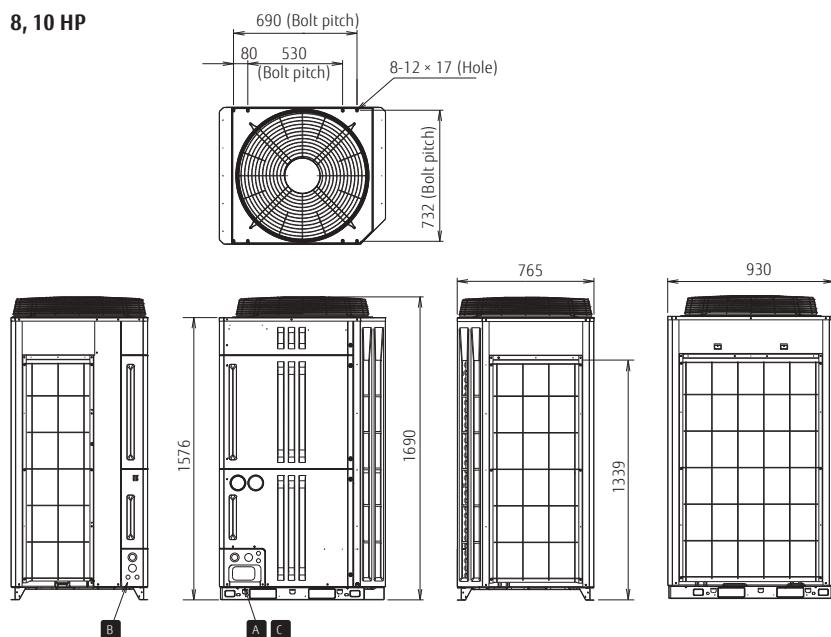

#### 12, 14, 16, 18 HP

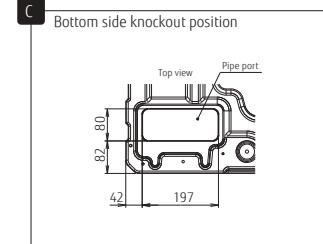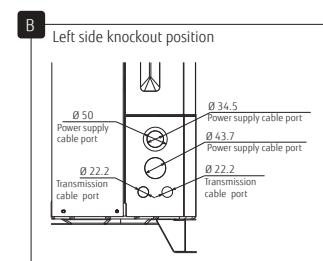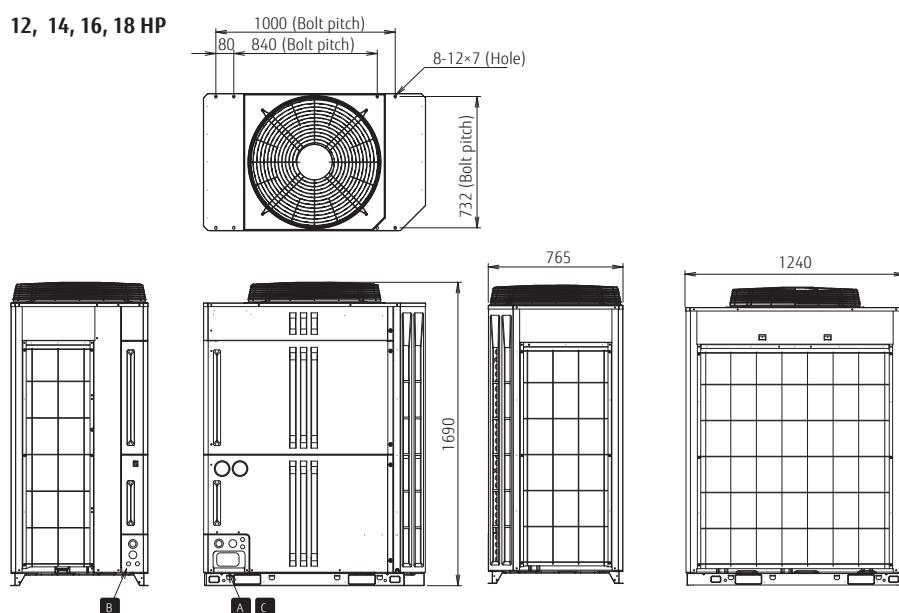

For more information, please contact Fujitsu General Limited. ([www.fujitsu-general.com](http://www.fujitsu-general.com))

# PRODUCT LINEUP: VRF-AIRSTAGE™ V-Series

## Outdoor units specifications

### Space Saving Combination

| Rating Capacity range            | HP                             | 8                               | 10          | 12            | 14            | 16            | 18            | 20            | 22            | 24            | 26                 | 28                 |                       |                       |
|----------------------------------|--------------------------------|---------------------------------|-------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|--------------------|--------------------|-----------------------|-----------------------|
|                                  |                                |                                 |             |               |               |               |               |               |               |               |                    |                    |                       |                       |
| Set Model name                   |                                | AJY072LNLBH                     | AJY090LNLBH | AJY108LNLBH   | AJY126LNLBH   | AJY144LNLBH   | AJY162LNLBH   | AJY180LNLBH   | AJY198LNLBH   | AJY216LNLBH   | AJY234LNLBH        | AJY252LNLBH        |                       |                       |
| Unit 1                           |                                | AJY072LNLBH                     | AJY090LNLBH | AJY108LNLBH   | AJY126LNLBH   | AJY144LNLBH   | AJY162LNLBH   | AJY180LNLBH   | AJY198LNLBH   | AJY216LNLBH   | AJY234LNLBH        | AJY252LNLBH        |                       |                       |
| Unit 2                           |                                |                                 |             |               |               |               |               |               |               |               |                    |                    |                       |                       |
| Unit 3                           |                                |                                 |             |               |               |               |               |               |               |               |                    |                    |                       |                       |
| Maximum Connectable Indoor Unit  |                                | 13                              | 16          | 19            | 23            | 26            | 29            | 33            | 36            | 40            | 43                 | 46                 |                       |                       |
| Indoor unit connectable capacity | Cooling                        | kW                              | 11.2-29.1   | 14-36.4       | 16.8-43.5     | 20-52         | 22.5-58.5     | 25-65         | 28-72.8       | 31.2-81.1     | 34-88.4            | 36.5-94.9          | 39-101.4              |                       |
| Power source                     |                                |                                 |             |               |               |               |               |               |               |               |                    |                    |                       |                       |
| T1 condition                     |                                |                                 |             |               |               |               |               |               |               |               |                    |                    |                       |                       |
|                                  | Capacity                       | Cooling                         | kW          | 22.4          | 28.0          | 33.5          | 40.0          | 45.0          | 50.0          | 56.0          | 62.4               | 68.0               | 73.0                  | 78.0                  |
|                                  |                                | Heating                         |             | 25.0          | 31.5          | 37.5          | 45.0          | 50.0          | 50.0          | 63.0          | 70.0               | 76.5               | 81.5                  | 81.5                  |
|                                  |                                | Cooling                         | Btu/h       | 76400         | 95500         | 114300        | 136500        | 153500        | 170600        | 191000        | 212900             | 232000             | 249000                | 266100                |
|                                  |                                | Heating                         |             | 85300         | 107500        | 128000        | 153500        | 170600        | 170600        | 215000        | 238800             | 261000             | 278100                | 278100                |
|                                  | Input power                    | Cooling                         | kW          | 5.20          | 7.28          | 8.96          | 10.96         | 13.01         | 16.56         | 14.56         | 16.16              | 18.24              | 20.29                 | 23.84                 |
|                                  |                                | Heating                         |             | 5.17          | 7.25          | 8.65          | 11.17         | 13.63         | 13.63         | 14.50         | 16.34              | 18.42              | 20.88                 | 20.88                 |
|                                  | Current                        | Cooling                         | A           | 9.2           | 12.0          | 15.0          | 17.7          | 20.7          | 26.1          | -             | -                  | -                  | -                     | -                     |
|                                  |                                | Heating                         |             | 9.2           | 12.2          | 14.6          | 18.2          | 21.5          | -             | -             | -                  | -                  | -                     | -                     |
|                                  | EER                            | Cooling                         | W/W         | 4.31          | 3.85          | 3.74          | 3.65          | 3.46          | 3.02          | 3.85          | 3.86               | 3.73               | 3.60                  | 3.27                  |
|                                  |                                | Heating                         |             | 4.84          | 4.35          | 4.34          | 4.03          | 3.67          | 4.34          | 4.28          | 4.15               | 3.90               | 3.90                  | 3.90                  |
|                                  | EER                            | Cooling                         | Btu/h/W     | 14.7          | 13.1          | 12.8          | 12.5          | 11.8          | 10.3          | 13.1          | 13.2               | 12.7               | 12.3                  | 11.2                  |
|                                  |                                | Heating                         |             | 16.5          | 14.8          | 14.8          | 13.7          | 12.5          | 14.8          | 14.6          | 14.2               | 13.3               | 13.3                  | 13.3                  |
|                                  | Power factor                   |                                 | %           | 90            | 92            | 92            | 92            | 92            | 93            | -             | -                  | -                  | -                     | -                     |
|                                  | Airflow rate                   | High                            | m³/h        | 11100         | 11100         | 13000         | 13000         | 13700         | 13700         | 11100×2       | 13000+11100        | 13000+11100        | 13700+11100           | 13700+11100           |
|                                  | Sound pressure level /         | Cooling                         | dB(A)       | 56/77         | 58/79         | 57/78         | 60/81         | 62/83         | 63/84         | 61/82         | 62/83              | 63/84              | 64/85                 | 64/85                 |
|                                  |                                | Heating                         |             | 58/80         | 59/81         | 60/83         | 62/84         | 64/86         | 64/86         | 62/84         | 63/85              | 64/86              | 65/87                 | 65/87                 |
|                                  | Power level                    |                                 | Pa          | 82            | 82            | 82            | 82            | 82            | 82            | 82            | 82                 | 82                 | 82                    | 82                    |
|                                  | External static pressure (Max) |                                 |             |               |               |               |               |               |               |               |                    |                    |                       |                       |
|                                  | Compressor motor output        |                                 | kW          | 7.5           | 7.5           | 11            | 11            | 11            | 7.5×2         | 11.0×7.5      | 11.0×7.5           | 11.0×7.5           | 11.0×7.5              | 11.0×7.5              |
|                                  | Heat exchanger fin             |                                 |             |               |               |               |               |               |               |               |                    |                    |                       |                       |
|                                  | Height                         |                                 | mm          | 1690          | 1690          | 1690          | 1690          | 1690          | 1690×2        | 1690×2        | 1690×2             | 1690×2             | 1690×2                | 1690×2                |
|                                  | Net Dimensions                 | Width                           |             | 930           | 930           | 1240          | 1240          | 1240          | 1240×2        | 1240+930      | 1240+930           | 1240+930           | 1240+930              | 1240+930              |
|                                  |                                | Depth                           |             | 765           | 765           | 765           | 765           | 765           | 765×2         | 765×2         | 765×2              | 765×2              | 765×2                 | 765×2                 |
|                                  | Weight                         |                                 | kg          | 255           | 255           | 279           | 279           | 279           | 279×255       | 279×255       | 279×255            | 279×255            | 279×255               | 279×255               |
|                                  | Refrigerant                    | Type (Global Warming Potential) |             | R410A (2,088)      | R410A (2,088)      | R410A (2,088)         |                       |
|                                  | Charge                         | kg(CO2eq-T)                     |             | 11.7 (24.4)   | 11.7 (24.4)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.7×2        | 11.8+11.7 (24.4×2) | 11.8+11.7 (24.4×2) | 11.8+11.7 (24.6+24.4) | 11.8+11.7 (24.6+24.4) |
|                                  | Connection pipe diameter       | Liquid                          | mm          | 12.70         | 12.70         | 12.70         | 12.70         | 12.70         | 12.70         | 12.70         | 12.70              | 12.70              | 12.70                 | 12.70                 |
|                                  |                                | Gas                             |             | 22.22         | 22.22         | 28.58         | 28.58         | 28.58         | 28.58         | 28.58         | 28.58              | 34.92              | 34.92                 | 34.92                 |
|                                  | Operation range                | Cooling                         | °CDB        | -15 to 52     | -5 to 52      | -5 to 52           | -5 to 52           | -5 to 52              | -5 to 52              |
|                                  |                                | Heating                         |             | -20 to 21          | -20 to 21          | -20 to 21             | -20 to 21             |

### Energy Efficiency Combination

| Rating Capacity range            | HP                             | 16                              | 18           | 20              | 24              | 26                 | 28              | 30              |                      |                      |
|----------------------------------|--------------------------------|---------------------------------|--------------|-----------------|-----------------|--------------------|-----------------|-----------------|----------------------|----------------------|
|                                  |                                |                                 |              |                 |                 |                    |                 |                 |                      |                      |
| Set Model name                   |                                | AJY144LNLBHH                    | AJY162LNLBHH | AJY180LNLBHH    | AJY216LNLBHH    | AJY234LNLBHH       | AJY252LNLBHH    | AJY270LNLBHH    |                      |                      |
| Unit 1                           |                                | AJY072LNLBH                     | AJY090LNLBH  | AJY108LNLBH     | AJY126LNLBH     | AJY140LNLBH        | AJY158LNLBH     | AJY176LNLBH     |                      |                      |
| Unit 2                           |                                | AJY072LNLBH                     | AJY090LNLBH  | AJY072LNLBH     | AJY072LNLBH     | AJY072LNLBH        | AJY072LNLBH     | AJY072LNLBH     |                      |                      |
| Unit 3                           |                                |                                 |              |                 |                 |                    |                 |                 |                      |                      |
| Maximum Connectable Indoor Unit  |                                | 26                              | 29           | 33              | 39              | 43                 | 46              | 50              |                      |                      |
| Indoor unit connectable capacity | Cooling                        | kW                              | 22.4-58.2    | 25.2-65.5       | 28.7-6.6        | 33.6-87.3          | 36.4-94.6       | 39.2-101.7      | 42.4-110.2           |                      |
| Power source                     |                                |                                 |              |                 |                 |                    |                 |                 |                      |                      |
| T1 condition                     |                                |                                 |              |                 |                 |                    |                 |                 |                      |                      |
|                                  | Capacity                       | Cooling                         | kW           | 44.8            | 50.4            | 55.9               | 67.2            | 72.8            | 78.3                 | 84.8                 |
|                                  |                                | Heating                         |              | 50.0            | 56.5            | 62.5               | 75.0            | 81.5            | 87.5                 | 95.0                 |
|                                  |                                | Cooling                         | Btu/h        | 152800          | 171900          | 190700             | 229200          | 248300          | 267100               | 289300               |
|                                  |                                | Heating                         |              | 170600          | 192800          | 213300             | 255900          | 278100          | 298600               | 324100               |
|                                  | Input power                    | Cooling                         | kW           | 10.40           | 12.48           | 14.16              | 15.60           | 17.68           | 19.36                | 21.36                |
|                                  |                                | Heating                         |              | 10.34           | 12.42           | 13.82              | 15.51           | 17.59           | 18.99                | 21.51                |
|                                  | Current                        | Cooling                         | A            | -               | -               | -                  | -               | -               | -                    | -                    |
|                                  |                                | Heating                         |              | -               | -               | -                  | -               | -               | -                    | -                    |
|                                  | EER                            | Cooling                         | W/W          | 4.31            | 4.04            | 3.95               | 4.31            | 4.12            | 4.04                 | 3.97                 |
|                                  |                                | Heating                         |              | 4.84            | 4.55            | 4.52               | 4.84            | 4.63            | 4.61                 | 4.42                 |
|                                  | COP                            | Cooling                         | Btu/h/W      | 14.7            | 13.8            | 13.5               | 14.7            | 14.0            | 13.8                 | 13.5                 |
|                                  |                                | Heating                         |              | 16.5            | 15.5            | 15.4               | 16.5            | 15.8            | 15.7                 | 15.1                 |
|                                  | Power factor                   |                                 | %            | -               | -               | -                  | -               | -               | -                    | -                    |
|                                  | Airflow rate                   | High                            | m³/h         | 11100×2         | 11100×2         | 13000+11100        | 11100×3         | 11100×3         | 13000+11100×2        | 13000+11100×2        |
|                                  | Sound pressure level /         | Cooling                         | dB(A)        | 59/80           | 60/81           | 60/81              | 61/82           | 62/83           | 61/82                | 63/84                |
|                                  |                                | Heating                         |              | 61/83           | 62/84           | 62/85              | 63/85           | 64/86           | 64/86                | 65/87                |
|                                  | Power level                    |                                 | Pa           | 82              | 82              | 82                 | 82              | 82              | 82                   | 82                   |
|                                  | External static pressure (Max) |                                 |              |                 |                 |                    |                 |                 |                      |                      |
|                                  | Compressor motor output        |                                 | kW           | 7.5×2           | 7.5×2           | 11.0×7.5           | 7.5×3           | 7.5×3           | 11.0×7.5×2           | 11.0×7.5×2           |
|                                  | Heat exchanger fin             |                                 |              |                 |                 |                    |                 |                 |                      |                      |
|                                  | Height                         |                                 | mm           | 1690×2          | 1690×2          | 1690×2             | 1690×3          | 1690×3          | 1690×3               | 1690×3               |
|                                  | Net Dimensions                 | Width                           |              | 930×2           | 930×2           | 1240+930           | 930×3           | 930×3           | 1240+930×2           | 1240+930×2           |
|                                  |                                | Depth                           |              | 765×2           | 765×2           | 765×2              | 765×3           | 765×3           | 765×3                | 765×3                |
|                                  | Weight                         |                                 | kg           | 255×2           | 255×2           | 279×255            | 255×3           | 255×3           | 279×255×2            | 279×255×2            |
|                                  | Refrigerant                    | Type (Global Warming Potential) |              | R410A (2,088)   | R410A (2,088)   | R410A (2,088)      | R410A (2,088)   | R410A (2,088)   | R410A (2,088)        | R410A (2,088)        |
|                                  | Charge                         | kg(CO2eq-T)                     |              | 11.7×2 (24.4×2) | 11.7×2 (24.4×2) | 11.8+11.7 (24.4×2) | 11.7×3 (24.4×3) | 11.7×3 (24.4×3) | 11.8+11.7×2 (24.4×4) | 11.8+11.7×2 (24.4×4) |
|                                  | Connection pipe diameter       | Liquid                          | mm           | 12.70           | 15.88           | 15.88              | 15.88           | 15.88           | 15.88                | 19.05                |
|                                  |                                | Gas                             |              | 28.58           | 28.58           | 28.58              | 34.92           | 34.92           | 34.92                | 34.92                |
|                                  | Operation range                | Cooling                         | °CDB         | -5 to 52        | -5 to 52        | -5 to 52           | -5 to 52        | -5 to 52        | -5 to 52             | -5 to 52             |
|                                  |                                | Heating                         |              | -20 to 21       | -20 to 21       | -20 to 21          | -20 to 21       | -20 to 21       | -20 to 21            | -20 to 21            |


Note: Specifications are based on the following conditions.


Cooling(T1): Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB

Cooling(T3): Indoor temperature of 29°CDB / 19°CWB, and outdoor temperature of 46°CDB / 24°CWB

Heating: Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length: 7.5m. Height difference between outdoor and indoor unit: 0m.





## PRODUCT LINEUP: VRF-INDOOR UNITS

### VRF Indoor Unit Lineup

| Capacity range (kW) |   | 1.1 | 2.2   | 2.8         | 3.6         | 4.5         | 5.6         |                           |                          |
|---------------------|---|-----|---|-------------|-------------|-------------|-------------|---------------------------|--------------------------|
| Model code          |   | 4   | 7   | 9           | 12          | 14          | 18          |                           |                          |
| Cassette            | Compact<br>Grid type / Standard type                |     | AUXB04GBLH  | AUXB07GALH  | AUXB09GALH  | AUXB12GALH  | AUXB14GALH  | AUXB18GALH                |                          |
|                     | 4-way Flow<br>Slim type                             |     |   |             |             |             |             | AUXD18GALH                |                          |
|                     | 4-way Flow<br>Large type                            |     |   |             |             |             |             |                           | AUXA18GALH* <sup>1</sup> |
|                     | Circular Flow<br>Slim type                          |     |   |             |             |             |             |                           | AUXM018GLAH              |
|                     | Circular Flow<br>Large type                         |     |   |             |             |             |             |                           | AUXK018GLAH              |
| Duct                | Mini Duct<br>(With drain pump)                      |     | ARXK04GCLH  | ARXK07GCLH  | ARXK09GCLH  | ARXK12GCLH  | ARXK14GCLH  | ARXK18GCLH                |                          |
|                     | Slim Duct<br>(With drain pump)                      |     | ARXD04GALH* <sup>1</sup>                            | ARXD07GALH  | ARXD09GALH  | ARXD12GALH  | ARXD14GALH  | ARXD18GALH                |                          |
|                     | Medium<br>Static Pressure Duct                      |     |   |             |             |             |             |                           |                          |
|                     | High<br>Static Pressure Duct                        |     |   |             |             |             |             |                           |                          |
|                     | Large Airflow Duct<br>(Compact type)                |     |   |             |             |             |             | ARXN018GLBH* <sup>3</sup> |                          |
| Floor               | Large Airflow Duct                                  |     |   |             |             |             |             |                           | ARXN18GATH* <sup>4</sup> |
|                     | Floor<br>(*Same as Ceiling models)                  |     |   |             |             | ABYA12GATH  | ABYA14GATH  | ABYA18GATH                |                          |
|                     | Slim Concealed Floor<br>(*Same as Slim Duct models) |     | ARXD04GALH* <sup>1</sup>                            | ARXD07GALH  | ARXD09GALH  | ARXD12GALH  | ARXD14GALH  | ARXD18GALH                |                          |
|                     | Compact Floor                                       |     | AGYA004GCAH   | AGYA007GCAH | AGYA009GCAH | AGYA012GCAH | AGYA014GCAH |                           |                          |
| Ceiling             | Compact Floor<br>(EEV external)                     |     | AGYE004GCAH   | AGYE007GCAH | AGYE009GCAH | AGYE012GCAH | AGYE014GCAH |                           |                          |
|                     |   |     | With this model, connection of EV kit is necessary. |             |             |             |             |                           |                          |
| Ceiling             |   |     |   |             |             | ABYA12GATH  | ABYA14GATH  | ABYA18GATH                |                          |
| Wall<br>Mounted     | Wall Mounted  |     | ASYA004GTAH   | ASYA007GTAH | ASYA009GTAH | ASYA012GCAH | ASYA014GCAH | ASYA18GBCH                |                          |
|                     | Wall Mounted<br>(EEV external)                      |     | ASYE004GTAH   | ASYE007GTAH | ASYE009GTAH | ASYE012GCAH | ASYE014GCAH |                           |                          |
|                     |   |     | With this model, connection of EV kit is necessary. |             |             |             |             |                           |                          |

| 7.1<br>24 | 9.0<br>30    | 10.0<br>34   | 11.2<br>36   | 12.5<br>45   | 14.0<br>54  | 18.0<br>60 | 22.4<br>72 | 25.0<br>90 | 28.0<br>96 |
|-----------|--------------|--------------|--------------|--------------|-------------|------------|------------|------------|------------|
|           |              |              |              |              |             |            |            |            |            |
|           |              |              |              |              |             |            |            |            |            |
|           | AUXA30GALH   | AUXA34GALH   | AUXA36GALH   | AUXA45GALH   | AUXA54GALH  |            |            |            |            |
|           | AUXM030GLAH  |              |              |              |             |            |            |            |            |
|           | AUXK030GLAH  | AUXK034GLAH  | AUXK036GLAH  | AUXK045GLAH  | AUXK054GLAH |            |            |            |            |
|           |              |              |              |              |             |            |            |            |            |
|           |              |              |              |              |             |            |            |            |            |
|           | ARXA30GBLH   |              | ARXA36GBLH   | ARXA45GBLH   |             |            |            |            |            |
|           |              |              |              |              |             |            |            |            |            |
|           |              |              |              |              |             |            |            |            |            |
|           | ARXN30GATH*4 | ARXN34GATH*4 | ARXN36GATH*4 | ARXN45GATH*4 |             |            |            |            |            |
|           |              |              |              |              |             |            |            |            |            |
|           |              |              |              |              |             |            |            |            |            |
|           |              |              |              |              |             |            |            |            |            |
|           | ABYA30GATH   |              | ABYA36GATH   | ABYA45GATH   | ABYA54GATH  |            |            |            |            |
|           | ASYA030GTAH  | ASYA034GTAH  |              |              |             |            |            |            |            |

\*1: ARXD04GALH and AUXA18/24GALH cannot be connected to J-III L series. \*2: ARXC60/72/90/96G can be connected to J-III L series only.  
 \*3: Large Airflow Duct (Compact type) can be connected to J-IIIL series only. \*4: Large Airflow Duct can be connected to V-III series and VR-II series.



## PRODUCT LINEUP: VRF

**NEW**

### Compact Cassette Grid Type

Compact & Comfort

**Model:**  
AUXB04GBLH / AUXB07GALH/  
AUXB09GALH / AUXB12GALH/  
AUXB14GALH / AUXB18GALH/  
AUXB24GALH

**Panel Model:**  
UTG-UFYE-W



### Compact and stylish panel design

Compact and stylish panel design fits the grid type ceiling.  
It is a linear design suitable for grid shape of 620 mm × 620 mm  
grid ceiling.




### Flexible installation

It is suitable for ceiling of grid type and it has high degree of freedom of installation and it can be installed beside lighting and ventilation opening.



### Easy maintenance

Maintenance is easier by removing the ceiling panel next to the grill, maintenance can be done, and new installation of inspection hole is unnecessary, so construction costs can be suppressed.

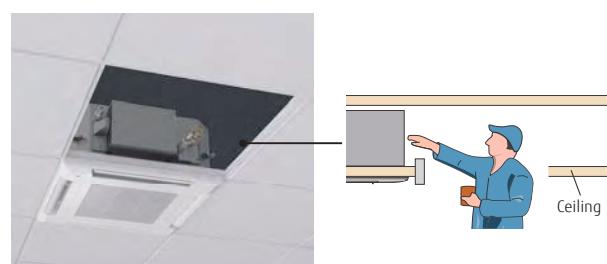

The air inlet grill can be installed in various directions, so maintenance is easy.





SPLIT

MULTI SPLIT

VRF



VENTILATION

OPTIONAL PARTS

AIR TO WATER

## High efficient compact design

High efficient compact design is realized by mounting a high density and large heat exchanger. Compact body makes it possible to install inconspicuously even in a meeting or office room and comfortable air conditioning is provided.

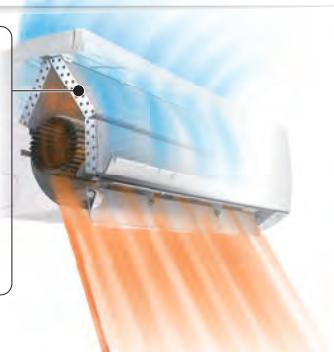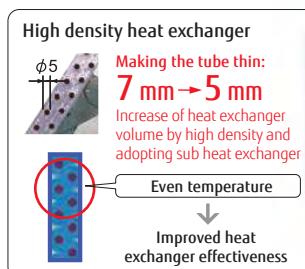

## More comfort airflow

Comfortable air conditioning is provided by mounting our unique power diffuser.

### Heating

Vertical airflow provides powerful floor level heating



### Cooling

Horizontal airflow does not blow cool air directly at the occupants in the room.




## Human sensor increases more energy saving

Energy saving operation starts automatically by detecting the motion of a person. 2 modes of save operation mode and stop mode can be selected.



Human sensor

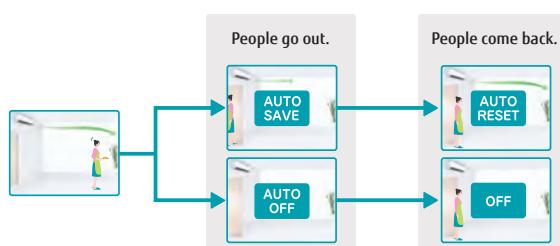


## 6 Fan Speed Control

Multistep airflow control is possible to suit the environment.

Fan speed  
Quiet

Low noise  
24 dB(A)

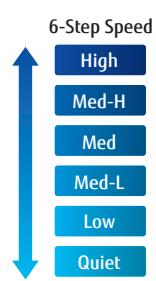

\* Compatible Remote Controller is as follows:  
UTY-RNRY2Z / UTY-RLRY / UTY-RSRY / UTY-RHRY / UTY-DCGY / UTY-DTGYZ1 / UTY-ALGX / UTY-APGX

PRODUCT LINEUP: VRF

## VRF Indoor Units Specifications



## Compact Cassette



NEW

| Model name                      |                        |         | AUXB04GBLH | AUXB07GALH | AUXB09GALH                      | AUXB12GALH      | AUXB14GALH | AUXB18GALH | AUXB24GALH |
|---------------------------------|------------------------|---------|------------|------------|---------------------------------|-----------------|------------|------------|------------|
| Single-phase, ~230V, 50Hz       |                        |         |            |            |                                 |                 |            |            |            |
| Capacity                        | Cooling                | kW      | 1.1        | 2.2        | 2.8                             | 3.6             | 4.5        | 5.6        | 7.1        |
|                                 | Heating                |         | 1.3        | 2.8        | 3.2                             | 4.1             | 5.0        | 6.3        | 8.0        |
| Input power                     |                        | W       | 23         | 25         | 25                              | 29              | 35         | 36         | 84         |
| Airflow rate                    | High                   | m³/h    | 530        | 540        | 550                             | 600             | 680        | 710        | 1,030      |
|                                 | Med                    |         | 420/450*1  | 450        | 450                             | 530             | 590        | 580        | 830        |
|                                 | Low                    |         | 300/350*1  | 350        | 350                             | 390             | 390        | 400        | 450        |
| Sound pressure level            | High                   | dB(A)   | 34         | 34         | 35                              | 37              | 38         | 41         | 50         |
|                                 | Med                    |         | 28/30*1    | 30         | 30                              | 34              | 34         | 35         | 44         |
|                                 | Low                    |         | 21/25*1    | 25         | 25                              | 27              | 27         | 27         | 30         |
| Net Dimensions (H × W × D)      |                        | mm      |            |            |                                 | 245 × 570 × 570 |            |            |            |
| Weight                          |                        | kg(lbs) |            |            | 15 (33)                         |                 |            | 17 (37)    |            |
| Connection                      | Liquid (Flare)         |         |            |            | 6.35                            |                 |            | 9.52       |            |
| pipe diameter                   | Gas (Flare)            | mm      | 9.52       |            | 12.70                           |                 |            | 15.88      |            |
| Drain hose diameter (I.D./O.D.) |                        |         |            |            | 25/32                           |                 |            |            |            |
| Cassette                        | Model name             |         |            |            | UTG-UFEY-E-W / UTG-UFYC-W       |                 |            |            |            |
| Grille                          | Net Dimensions (H×W×D) | mm      |            |            | 49 × 620 × 620 / 50 × 700 × 700 |                 |            |            |            |
|                                 | Weight                 | kg(lbs) |            |            | 2.5(5.5) / 2.6(6)               |                 |            |            |            |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

\*1: This value is under cooling operation.

## 4-way Cassette



| Model name                      |                        |         | AUXD18GALH      | AUXD24GALH | AUXA18GALH     | AUXA24GALH    | AUXA30GALH      | AUXA34GALH | AUXA36GALH | AUXA45GALH | AUXA54GALH |
|---------------------------------|------------------------|---------|-----------------|------------|----------------|---------------|-----------------|------------|------------|------------|------------|
| Single-phase, ~230V, 50Hz       |                        |         |                 |            |                |               |                 |            |            |            |            |
| Capacity                        | Cooling                | kW      | 5.6             | 7.1        | 5.6            | 7.1           | 9.0             | 10.0       | 11.2       | 12.5       | 14.0       |
|                                 | Heating                |         | 6.3             | 8.0        | 6.3            | 8.0           | 10.0            | 11.2       | 12.5       | 14.0       | 16.0       |
| Input power                     |                        | W       | 39              | 46         | 51             | 51            | 59              | 77         | 80         | 99         | 119        |
| Airflow rate                    | High                   | m³/h    | 1,150           | 1,280      | 1,420          | 1,420         | 1,600           | 1,750      | 1,800      | 1,900      | 2,000      |
|                                 | Med                    |         | 940             | 1,040      | 1,230          | 1,230         | 1,300           | 1,300      | 1,300      | 1,370      | 1,370      |
|                                 | Low                    |         | 870             | 870        | 1,100/1,000*1  | 1,100/1,000*1 | 1,100           | 1,100      | 1,100      | 1,100      | 1,100      |
| Sound pressure level            | High                   | dB(A)   | 36              | 38         | 40             | 40            | 40              | 43         | 44         | 46         | 47         |
|                                 | Med                    |         | 30              | 33         | 36             | 36            | 38              | 38         | 38         | 39         | 39         |
|                                 | Low                    |         | 29              | 29         | 33/31*1        | 33/31*1       | 33              | 33         | 33         | 33         | 33         |
| Net Dimensions (H × W × D)      |                        | mm      | 246 × 840 × 840 |            |                |               | 288 × 840 × 840 |            |            |            |            |
| Weight                          |                        | kg(lbs) | 22 (48)         |            |                |               | 27 (59)         |            |            |            |            |
| Connection                      | Liquid (Flare)         |         |                 |            |                |               | 9.52            |            |            |            |            |
| pipe diameter                   | Gas (Flare)            | mm      |                 |            |                | 15.88         |                 |            | 19.05      |            |            |
| Drain hose diameter (I.D./O.D.) |                        |         |                 |            | 25/32          |               |                 |            |            |            |            |
| Cassette                        | Model name             |         |                 |            | UTG-UGVA-W     |               |                 |            |            |            |            |
| Grille                          | Net Dimensions (H×W×D) | mm      |                 |            | 50 × 950 × 950 |               |                 |            |            |            |            |
|                                 | Weight                 | kg(lbs) |                 |            | 5.5 (12)       |               |                 |            |            |            |            |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

\*1: This value is "cooling operation / heating operation".

## Circular Flow Cassette



| Model name                      |                        |         | AUXM018GLAH             | AUXM024GLAH    | AUXM030GLAH    | AUXK018GLAH    | AUXK024GLAH             | AUXK030GLAH    | AUXK034GLAH    | AUXK036GLAH    | AUXK045GLAH    | AUXK054GLAH    |
|---------------------------------|------------------------|---------|-------------------------|----------------|----------------|----------------|-------------------------|----------------|----------------|----------------|----------------|----------------|
| Single-phase, ~230V, 50Hz       |                        |         |                         |                |                |                |                         |                |                |                |                |                |
| Capacity                        | Cooling                | kW      | 5.6                     | 7.1            | 9.0            | 5.6            | 7.1                     | 9.0            | 10.0           | 11.2           | 12.5           | 14.0           |
|                                 | Heating                |         | 6.3                     | 8.0            | 10.0           | 6.3            | 8.0                     | 10.0           | 11.2           | 12.5           | 14.0           | 16.0           |
| Input power                     |                        | W       | 20                      | 25             | 49             | 40             | 40                      | 47             | 47             | 61             | 89             | 116            |
| Airflow rate                    | High                   | m³/h    | 1,050                   | 1,120          | 1,470          | 1,420          | 1,420                   | 1,440          | 1,440          | 1,620          | 1,820          | 2,040          |
|                                 | Med-H                  |         | 930                     | 1,050          | 1,160          | 1,360          | 1,360                   | 1,440          | 1,440          | 1,500          | 1,590          | 1,800          |
|                                 | Med                    |         | 900                     | 930            | 1,070          | 1,300          | 1,300                   | 1,340          | 1,340          | 1,400          | 1,500          | 1,590          |
|                                 | Med-L                  |         | 870                     | 900            | 930            | 1,270          | 1,270                   | 1,300          | 1,300          | 1,340          | 1,400          | 1,440          |
|                                 | Low                    |         | 810                     | 870            | 900            | 1,200          | 1,200                   | 1,280          | 1,280          | 1,280          | 1,300          | 1,300          |
|                                 | Quiet                  |         | 780                     | 780            | 780            | 1,150          | 1,150                   | 1,150          | 1,150          | 1,150          | 1,150          | 1,150          |
| Sound pressure level            | High                   | dB(A)   | 33                      | 35             | 40             | 38             | 38                      | 39             | 39             | 41             | 44             | 47             |
|                                 | Med-H                  |         | 32                      | 33             | 36             | 37             | 37                      | 38             | 38             | 40             | 42             | 45             |
|                                 | Med                    |         | 31                      | 32             | 34             | 36             | 36                      | 37             | 37             | 38             | 40             | 42             |
|                                 | Med-L                  |         | 30                      | 31             | 32             | 35             | 35                      | 36             | 36             | 37             | 38             | 39             |
|                                 | Low                    |         | 29                      | 30             | 31             | 34             | 34                      | 35             | 35             | 36             | 36             | 36             |
|                                 | Quiet                  |         | 28                      | 28             | 28             | 33             | 33                      | 33             | 33             | 33             | 33             | 33             |
| Net Dimensions (H × W × D)      |                        | mm      | 246 × 840 × 840         |                |                |                | 288 × 840 × 840         |                |                |                |                |                |
| Weight                          |                        | kg(lbs) | 24.0 (53)               | 24.5 (54)      | 24.5 (54)      | 26.5 (58)      | 26.5 (58)               | 29.5 (65)      | 29.5 (65)      | 29.5 (65)      | 29.5 (65)      | 29.5 (65)      |
| Connection                      | Liquid (Flare)         |         | 6.35                    | 9.52           |                | 6.35           |                         |                | 9.52           |                |                |                |
| pipe diameter                   | Gas (Flare)            | mm      | 12.70                   | 15.88          |                | 12.70          |                         |                | 15.88          |                |                |                |
| Drain hose diameter (I.D./O.D.) |                        |         | 25/32                   |                |                |                | 25/32                   |                |                |                |                |                |
| Cassette                        | Model name             |         | UTG-UKYC-W / UTG-UKYA-B |                |                |                | UTG-UKYC-W / UTG-UKYA-B |                |                |                |                |                |
| Grille                          | Net Dimensions (H×W×D) | mm      | 53 × 950 × 950          | 53 × 950 × 950 | 53 × 950 × 950 | 53 × 950 × 950 | 53 × 950 × 950          | 53 × 950 × 950 | 53 × 950 × 950 | 53 × 950 × 950 | 53 × 950 × 950 | 53 × 950 × 950 |
|                                 | Weight                 | kg(lbs) | 6.0 (13)                | 6.0 (13)       | 6.0 (13)       | 6.0 (13)       | 6.0 (13)                | 6.0 (13)       | 6.0 (13)       | 6.0 (13)       | 6.0 (13)       | 6.0 (13)       |

Note : Specifications are based on the following conditions.


Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

When AUX\*018GLAH is connected to the outdoor unit other than J-III, pipe diameter should be Ø9.52/Ø15.88 (Liq/Gas)

When AUXK036GLAH, AUXK045GLAH, and AUXK054GLAH are connected to the outdoor unit other than J-III, gas pipe diameter should be Ø19.05.



## PRODUCT LINEUP: VRF

# VRF Indoor Units Specifications

Mini Duct



| Model name                      |                |       | ARXK04GCLH                | ARXK07GCLH | ARXK09GCLH | ARXK12GCLH | ARXK14GCLH      | ARXK18GCLH        | ARXK24GCLH |  |
|---------------------------------|----------------|-------|---------------------------|------------|------------|------------|-----------------|-------------------|------------|--|
| Power source                    |                |       | Single-phase, ~230V, 50Hz |            |            |            |                 |                   |            |  |
| Capacity                        | Cooling        | kW    | 1.1                       | 2.2        | 2.8        | 3.6        | 4.5             | 5.6               | 7.1        |  |
|                                 | Heating        |       | 1.3                       | 2.8        | 3.2        | 4.0        | 5.0             | 6.3               | 8.0        |  |
| Input power                     |                | W     | 26                        | 28         | 28         | 35         | 66              | 73                | 80         |  |
|                                 |                |       | 460                       | 460        | 460        | 550        | 760             | 930               | 1,160      |  |
| Airflow rate                    | High           | m³/h  | 440                       | —          | —          | —          | —               | —                 | —          |  |
|                                 | Med-H          |       | 420                       | 420        | 420        | 480        | 560             | 740               | 960        |  |
|                                 | Med            |       | 400                       | —          | —          | —          | —               | —                 | —          |  |
|                                 | Med-L          |       | 370                       | 370        | 370        | 410        | 410             | 540               | 750        |  |
|                                 | Low            |       | 340                       | —          | —          | —          | —               | —                 | —          |  |
| Static pressure range           |                |       | 0 to 30                   |            |            |            | 0 to 50         |                   |            |  |
| Standard static pressure        |                |       | 10                        |            |            |            | 15              |                   |            |  |
| Sound pressure level            | High           | dB(A) | 25                        | 26         | 26         | 29         | 34              | 33                | 32         |  |
|                                 | Med-H          |       | 24                        | 25         | 25         | 27         | 31              | 30                | 30         |  |
|                                 | Med            |       | 23                        | 24         | 24         | 26         | 28              | 28                | 28         |  |
|                                 | Med-L          |       | 22                        | 23         | 23         | 25         | 26              | 26                | 27         |  |
|                                 | Low            |       | 21                        | 22         | 22         | 24         | 24              | 24                | 25         |  |
|                                 | Quiet          |       | 20                        | 21         | 21         | 22         | 22              | 22                | 22         |  |
| Net Dimensions (H × W × D)      |                |       | 198 × 700 × 450           |            |            |            | 198 × 900 × 450 | 198 × 1,100 × 450 |            |  |
| Weight                          |                |       | kg(lbs)                   | 14.5 (32)  | 15.5 (34)  |            | 16 (35)         | 19 (42)           | 22.5 (50)  |  |
| Connection pipe diameter        | Liquid (Flare) | mm    |                           |            | 6.35       |            |                 | 9.52              |            |  |
|                                 | Gas (Flare)    |       |                           |            | 9.52       | 12.70      |                 | 15.88             |            |  |
| Drain hose diameter (I.D./O.D.) |                |       |                           |            |            |            | 25/32           |                   |            |  |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Slim Duct / Slim Concealed Floor



| Model name                      |                |       | ARXD04GALH                | ARXD07GALH | ARXD09GALH | ARXD12GALH | ARXD14GALH      | ARXD18GALH        | ARXD24GALH |  |
|---------------------------------|----------------|-------|---------------------------|------------|------------|------------|-----------------|-------------------|------------|--|
| Power source                    |                |       | Single-phase, ~230V, 50Hz |            |            |            |                 |                   |            |  |
| Capacity                        | Cooling        | kW    | 1.1                       | 2.2        | 2.8        | 3.6        | 4.5             | 5.6               | 7.1        |  |
|                                 | Heating        |       | 1.3                       | 2.8        | 3.2        | 4.0        | 5.0             | 6.3               | 8.0        |  |
| Input power                     |                | W     | 40                        | 44         | 50         | 54         | 92              | 83                | 122        |  |
|                                 |                |       | 510                       | 550        | 600        | 600        | 800             | 940               | 1,330      |  |
| Airflow rate                    | High           | m³/h  | 400/470* <sup>1</sup>     | 490        | 550        | 510        | 710             | 840               | 1,240      |  |
|                                 | Med            |       | 320/440* <sup>1</sup>     | 440        | 480        | 450        | 610             | 750               | 1,100      |  |
|                                 | Low            |       | 20/22* <sup>1</sup>       | 22         | 24         | 24         | 28              | 28                | 29         |  |
| Static pressure range           |                |       | 0 to 90                   | 0 to 90    | 0 to 90    | 0 to 90    | 0 to 90         | 0 to 90           | 0 to 50    |  |
| Standard static pressure        |                |       | 25                        | 25         | 25         | 25         | 25              | 25                | 25         |  |
| Sound pressure level            | High           | dB(A) | 26                        | 28         | 29         | 30         | 34              | 34                | 35         |  |
|                                 | Med            |       | 21/25* <sup>1</sup>       | 25         | 26         | 27         | 32              | 32                | 32         |  |
|                                 | Low            |       | 20/22* <sup>1</sup>       | 22         | 24         | 24         | 28              | 28                | 29         |  |
| Net Dimensions (H × W × D)      |                |       | 198 × 700 × 620           |            |            |            | 198 × 900 × 620 | 198 × 1,100 × 620 |            |  |
| Weight                          |                |       | kg(lbs)                   | 17 (37)    |            | 18 (40)    |                 | 22 (48)           | 26 (57)    |  |
| Connection pipe diameter        | Liquid (Flare) | mm    |                           |            | 6.35       |            |                 | 9.52              |            |  |
|                                 | Gas (Flare)    |       |                           |            | 12.70      |            |                 | 15.88             |            |  |
| Drain hose diameter (I.D./O.D.) |                |       |                           |            |            | 25/32      |                 |                   |            |  |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

\*1: This value is under cooling operation.

Medium Static Pressure Duct



| Model name                      |                |       | ARXA24GBLH                | ARXA30GBLH | ARXA36GBLH | ARXA45GBLH |  |
|---------------------------------|----------------|-------|---------------------------|------------|------------|------------|--|
| Power source                    |                |       | Single-phase, ~230V, 50Hz |            |            |            |  |
| Capacity                        | Cooling        | kW    | 7.1                       | 9.0        | 11.2       | 12.5       |  |
|                                 | Heating        |       | 8.0                       | 10.0       | 12.5       | 14.0       |  |
| Input power                     |                | W     | 94                        | 108        | 194        | 240        |  |
|                                 |                |       | 1,280                     | 1,410      | 1,840      | 1,970      |  |
| Airflow rate                    | High           | m³/h  | 990                       | 1,280      | 1,600      | 1,860      |  |
|                                 | Med            |       | 840                       | 1,150      | 1,470      | 1,640      |  |
|                                 | Low            |       | 0 to 150                  | 0 to 150   | 0 to 150   | 0 to 150   |  |
| Static pressure range           |                |       | 40                        | 50         | 50         | 60         |  |
| Standard static pressure        |                |       | 31                        | 34         | 37         | 41         |  |
| Sound pressure level            | High           | dB(A) | 27                        | 32         | 35         | 38         |  |
|                                 | Med            |       | 23                        | 29         | 33         | 36         |  |
|                                 | Low            |       |                           |            |            |            |  |
| Net Dimensions (H × W × D)      |                |       | 270 × 1,135 × 700         |            |            |            |  |
| Weight                          |                |       | kg(lbs)                   | 36 (79)    | 40 (88)    |            |  |
| Connection pipe diameter        | Liquid (Flare) | mm    |                           |            | 9.52       |            |  |
|                                 | Gas (Flare)    |       |                           | 15.88      |            | 19.05      |  |
| Drain hose diameter (I.D./O.D.) |                |       |                           |            | 25/32      |            |  |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

## High Static Pressure Duct



| Model name                      |                          |                   | ARXC36GBTH                | ARXC45GATH | ARXC60GATH* | ARXC72GBTH        | ARXC90GBTH | ARXC96GATH |  |
|---------------------------------|--------------------------|-------------------|---------------------------|------------|-------------|-------------------|------------|------------|--|
| Power source                    |                          |                   | Single-phase, ~230V, 50Hz |            |             |                   |            |            |  |
| Capacity                        | Cooling                  | kW                | 11.2                      | 12.5       | 18.0        | 22.4              | 25.0       | 28.0       |  |
|                                 | Heating                  |                   | 12.5                      | 14.0       | 20.0        | 25.0              | 28.0       | 31.5       |  |
| Input power                     | W                        | m <sup>3</sup> /h | 207                       | 715        | 730         | 681               | 819        | 838        |  |
|                                 | High                     |                   | 1,990                     | 3,500      | 3,500       | 3,900             | 4,300      | 4,850      |  |
|                                 | Med                      |                   | 1,680                     | 3,000      | 3,000       | 3,300             | 4,000      | 4,250      |  |
| Airflow rate                    | Low                      |                   | 1,330                     | 2,460      | 2,460       | 3,000             | 3,500      | 3,600      |  |
|                                 | Static pressure range    |                   | 0 to 200                  | 100 to 250 | 100 to 250  | 0 to 300          | 0 to 300   | 0 to 300   |  |
|                                 | Standard static pressure |                   | Pa                        | 100        | 100         | 150               | 150        | 150        |  |
| Sound pressure level            | High                     | dB(A)             | 42                        | 49         | 49          | 47                | 48         | 48         |  |
|                                 | Med                      |                   | 36                        | 45         | 45          | 43                | 46         | 45         |  |
|                                 | Low                      |                   | 32                        | 42         | 42          | 40                | 44         | 42         |  |
| Net Dimensions (H × W × D)      |                          |                   | mm                        |            |             | 400 × 1,050 × 500 |            |            |  |
| Weight                          |                          |                   | kg(lbs)                   |            |             | 40 (88)           |            |            |  |
| Connection pipe diameter        |                          |                   | mm                        |            |             | 9.52 (Flare)      |            |            |  |
| Drain hose diameter (I.D./O.D.) |                          |                   |                           |            |             | 19.05 (Flare)     |            |            |  |
|                                 |                          |                   |                           |            |             | 25/32             |            |            |  |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.

Voltage : 230 [V].

## Large Airflow Duct



| Model name                      |                          |                   | ARXN18GATH                | ARXN24GATH | ARXN30GATH | ARXN34GATH        | ARXN36GATH | ARXN45GATH |  |
|---------------------------------|--------------------------|-------------------|---------------------------|------------|------------|-------------------|------------|------------|--|
| Power source                    |                          |                   | Single-phase, ~230V, 50Hz |            |            |                   |            |            |  |
| Capacity                        | Cooling                  | kW                | 5.6                       | 7.1        | 9.0        | 10.0              | 11.2       | 12.5       |  |
|                                 | Heating                  |                   | 6.3                       | 8.0        | 10.0       | 11.2              | 12.5       | 14.0       |  |
| Input power                     | W                        | m <sup>3</sup> /h | 154                       | 205        | 306        | 432               | 572        | 572        |  |
|                                 | High                     |                   | 2,280                     | 2,640      | 3,200      | 3,720             | 4,120      | 4,120      |  |
|                                 | Med                      |                   | —                         | —          | —          | —                 | —          | —          |  |
| Airflow rate                    | Low                      |                   | —                         | —          | —          | —                 | —          | —          |  |
|                                 | Static pressure range    |                   | Pa                        | 50 to 100  | 50 to 150  | 50 to 250         | 50 to 250  | 50 to 300  |  |
|                                 | Standard static pressure |                   | Pa                        | 50         | 50         | 50                | 50         | 60         |  |
| Sound pressure level            | High                     | dB(A)             | 35                        | 37         | 40         | 43                | 45         | 45         |  |
|                                 | Med                      |                   | —                         | —          | —          | —                 | —          | —          |  |
|                                 | Low                      |                   | —                         | —          | —          | —                 | —          | —          |  |
| Net Dimensions (H × W × D)      |                          |                   | mm                        |            |            | 450 × 1,587 × 700 |            |            |  |
| Weight                          |                          |                   | kg(lbs)                   |            |            | 84 (185)          |            |            |  |
| Connection pipe diameter        |                          |                   | mm                        |            |            | 9.52 (Flare)      |            |            |  |
| Drain hose diameter (I.D./O.D.) |                          |                   |                           |            |            | 15.88 (Flare)     |            |            |  |
|                                 |                          |                   |                           |            |            | 25/32             |            |            |  |

Note : Specifications are based on the following conditions.

Large Airflow Duct can be connected to V-III series and VR-II series.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.

Voltage : 230 [V].

## Large Airflow Duct (Compact type)




| Model name                      |                       |                   | ARXN018GLBH                 | ARXN024GTBH | ARXN030GTBH |  |
|---------------------------------|-----------------------|-------------------|-----------------------------|-------------|-------------|--|
| Power source                    |                       |                   | Single - phase, ~230V, 50Hz |             |             |  |
| Capacity                        | Cooling               | kW                | 5.6                         | 7.1         | 9.0         |  |
|                                 | Heating               |                   | 6.3                         | 8.0         | 10.0        |  |
| Input power                     | W                     | m <sup>3</sup> /h | 173                         | 180         | 273         |  |
|                                 | High                  |                   | 1,720                       | 2,100       | 2,700       |  |
|                                 | Me-Hi                 |                   | -                           | 2,050       | 2,390       |  |
| Airflow rate                    | Med                   |                   | 1,470                       | 1,860       | 2,080       |  |
|                                 | Me-Lo                 |                   | -                           | 1,660       | 1,770       |  |
|                                 | Low                   |                   | 1,360                       | 1,470       | 1,470       |  |
|                                 | Quiet                 |                   | -                           | 1,260       | 1,260       |  |
|                                 | Static pressure range |                   | Pa                          | 0 to 80     | 0 to 100    |  |
| Standard static pressure        |                       |                   | Pa                          | 50          | 50          |  |
| Sound pressure level            | High                  | dB(A)             | 36                          | 37          | 41          |  |
|                                 | Me-Hi                 |                   | -                           | 35          | 38          |  |
|                                 | Med                   |                   | 33                          | 33          | 34          |  |
|                                 | Me-Lo                 |                   | -                           | 31          | 31          |  |
|                                 | Low                   |                   | 30                          | 28          | 28          |  |
|                                 | Quiet                 |                   | -                           | 26          | 26          |  |
| Net Dimensions (H × W × D)      |                       |                   | mm                          |             |             |  |
| Weight                          |                       |                   | 270 × 1,135 × 700           |             |             |  |
| Connection pipe diameter        |                       |                   | kg(lbs)                     |             |             |  |
| Drain hose diameter (I.D./O.D.) |                       |                   | 40 (88)                     |             |             |  |
|                                 |                       |                   | 48 (106)                    |             |             |  |
|                                 |                       |                   | 6.35                        |             |             |  |
|                                 |                       |                   | 12.70                       |             |             |  |
|                                 |                       |                   | 9.52                        |             |             |  |
|                                 |                       |                   | 15.88                       |             |             |  |
|                                 |                       |                   | 25 / 32                     |             |             |  |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].



## PRODUCT LINEUP: VRF

# VRF Indoor Units Specifications

Compact Floor



| Model name                      |                |         | AGYA004GCAH               | AGYA007GCAH | AGYA009GCAH | AGYA012GCAH | AGYA014GCAH | AGYE004GCAH | AGYE007GCAH               | AGYE009GCAH | AGYE012GCAH | AGYE014GCAH |  |  |  |
|---------------------------------|----------------|---------|---------------------------|-------------|-------------|-------------|-------------|-------------|---------------------------|-------------|-------------|-------------|--|--|--|
| Power source                    |                |         | Single-phase, ~230V, 50Hz |             |             |             |             |             | Single-phase, ~230V, 50Hz |             |             |             |  |  |  |
| Capacity                        | Cooling        | kW      | 1.1                       | 2.2         | 2.8         | 3.6         | 4.0         | 1.1         | 2.2                       | 2.8         | 3.6         | 4.0         |  |  |  |
|                                 | Heating        |         | 1.3                       | 2.8         | 3.2         | 4.0         | 4.5         | 1.3         | 2.8                       | 3.2         | 4.0         | 4.5         |  |  |  |
| Input power                     |                |         | 12 / 14                   | 16          | 17          | 22          | 29          | 12 / 14     | 16                        | 17          | 22          | 29          |  |  |  |
| Airflow rate                    | High           | m³/h    | 380 / 430                 | 470         | 500         | 590         | 670         | 380 / 430   | 470                       | 500         | 590         | 670         |  |  |  |
|                                 | Med-H          |         | 350                       | 420         | 450         | 520         | 590         | 350         | 420                       | 450         | 520         | 590         |  |  |  |
|                                 | Med            |         | 320                       | 390         | 400         | 470         | 520         | 320         | 390                       | 400         | 470         | 520         |  |  |  |
|                                 | Med-L          |         | 310                       | 360         | 360         | 420         | 450         | 310         | 360                       | 360         | 420         | 450         |  |  |  |
|                                 | Low            |         | 280                       | 330         | 330         | 390         | 390         | 280         | 330                       | 330         | 390         | 390         |  |  |  |
|                                 | Quiet          |         | 210                       | 270         | 270         | 340         | 340         | 210         | 270                       | 270         | 340         | 340         |  |  |  |
| Sound pressure level            | High           | dB(A)   | 35 / 36                   | 37          | 38          | 42          | 46          | 35 / 36     | 37                        | 38          | 42          | 46          |  |  |  |
|                                 | Med-H          |         | 33                        | 35          | 36          | 39          | 42          | 33          | 35                        | 36          | 39          | 42          |  |  |  |
|                                 | Med            |         | 31                        | 33          | 34          | 37          | 39          | 31          | 33                        | 34          | 37          | 39          |  |  |  |
|                                 | Med-L          |         | 30                        | 31          | 31          | 35          | 36          | 30          | 31                        | 31          | 35          | 36          |  |  |  |
|                                 | Low            |         | 28                        | 29          | 29          | 33          | 33          | 28          | 29                        | 29          | 33          | 33          |  |  |  |
|                                 | Quiet          |         | 22                        | 22          | 22          | 30          | 30          | 22          | 22                        | 22          | 30          | 30          |  |  |  |
| Net Dimensions (H × W × D)      |                |         | 600 x 740 x 200           |             |             |             |             |             | 600 x 740 x 200           |             |             |             |  |  |  |
| Weight                          | kg(lbs)        | 15 (33) | 15 (33)                   | 15 (33)     | 15 (33)     | 15 (33)     | 14.5 (32)   | 14.5 (32)   | 14.5 (32)                 | 14.5 (32)   | 14.5 (32)   | 14.5 (32)   |  |  |  |
| Connection pipe diameter        | Liquid (Flare) | mm      | 6.35                      |             |             |             | 6.35        |             |                           |             | 6.35        |             |  |  |  |
|                                 | Gas (Flare)    |         | 9.52                      |             |             |             | 12.70       |             |                           |             | 12.70       |             |  |  |  |
| Drain hose diameter (I.D./O.D.) |                |         | 13.8/15.8to16.7           |             |             |             |             |             | 13.8/15.8to16.7           |             |             |             |  |  |  |
| EV Kit (option)                 |                |         | -                         |             |             |             |             |             | UTR-EV09XB                |             |             |             |  |  |  |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.

Voltage : 230 [V].

When AGY\*004GCAH, AGY\*007GCAH, and AGY\*009GCAH are connected to the outdoor unit other than J-IIIL, gas pipe diameter should be Ø12.70.

Floor/Ceiling



| Model name                      |                |         | ABYA12GATH                | ABYA14GATH | ABYA18GATH | ABYA24GATH |       |  |
|---------------------------------|----------------|---------|---------------------------|------------|------------|------------|-------|--|
| Power source                    |                |         | Single-phase, ~230V, 50Hz |            |            |            |       |  |
| Capacity                        | Cooling        | kW      | 3.6                       | 4.5        | 5.6        | 7.1        |       |  |
|                                 | Heating        |         | 4.0                       | 5.0        | 6.3        | 8.0        |       |  |
| Input power                     |                |         | 30                        | 42         | 74         | 99         |       |  |
| Airflow rate                    | High           | m³/h    | 660                       | 780        | 1,000      | 1,000      |       |  |
|                                 | Med            |         | 570                       | 640        | 720        | 820        |       |  |
|                                 | Low            |         | 490                       | 550        | 580        | 680        |       |  |
| Sound pressure level            | High           | dB(A)   | 36                        | 40         | 46         | 47         |       |  |
|                                 | Med            |         | 32                        | 36         | 39         | 42         |       |  |
|                                 | Low            |         | 28                        | 34         | 35         | 37         |       |  |
| Net Dimensions (H × W × D)      |                |         | 199 x 990 x 655           |            |            |            |       |  |
| Weight                          | kg(lbs)        | 25 (55) | 26 (57)                   | 26 (57)    | 27 (59)    |            |       |  |
| Connection pipe diameter        | Liquid (Flare) | mm      | 6.35                      |            |            |            | 9.52  |  |
|                                 | Gas (Flare)    |         | 12.70                     |            |            |            | 15.88 |  |
| Drain hose diameter (I.D./O.D.) |                |         | 25/32                     |            |            |            |       |  |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.

Voltage : 230 [V].

Ceiling



| Model name                      |                |          | ABYA30GATH                | ABYA36GATH | ABYA45GATH | ABYA54GATH |  |  |
|---------------------------------|----------------|----------|---------------------------|------------|------------|------------|--|--|
| Power source                    |                |          | Single-phase, ~230V, 50Hz |            |            |            |  |  |
| Capacity                        | Cooling        | kW       | 9.0                       | 11.2       | 12.5       | 14.0       |  |  |
|                                 | Heating        |          | 10.0                      | 12.5       | 14.0       | 16.0       |  |  |
| Input power                     |                |          | 66                        | 85         | 131        | 180        |  |  |
| Airflow rate                    | High           | m³/h     | 1,630                     | 1,690      | 2,010      | 2,270      |  |  |
|                                 | Med            |          | 1,370                     | 1,400      | 1,600      | 1,780      |  |  |
|                                 | Low            |          | 1,140                     | 1,170      | 1,230      | 1,280      |  |  |
| Sound pressure level            | High           | dB(A)    | 42                        | 45         | 48         | 51         |  |  |
|                                 | Med            |          | 38                        | 38         | 42         | 45         |  |  |
|                                 | Low            |          | 33                        | 34         | 35         | 36         |  |  |
| Net Dimensions (H × W × D)      |                |          | 240 x 1,660 x 700         |            |            |            |  |  |
| Weight                          | kg(lbs)        | 46 (101) | 48 (106)                  |            |            |            |  |  |
| Connection pipe diameter        | Liquid (Flare) | mm       | 9.52                      | 9.52       | 19.05      |            |  |  |
|                                 | Gas (Flare)    |          | 15.88                     | 15.88      | 25/32      |            |  |  |
| Drain hose diameter (I.D./O.D.) |                |          | 25/32                     |            |            |            |  |  |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.

Voltage : 230 [V].

## Wall Mounted



| Model name                      |                | ASYA004GTAH               | ASYA007GTAH | ASYA009GTAH | ASYE004GTAH | ASYE007GTAH               | ASYE009GTAH |
|---------------------------------|----------------|---------------------------|-------------|-------------|-------------|---------------------------|-------------|
| Power source                    |                | Single-phase, ~230V, 50Hz |             |             |             | Single-phase, ~230V, 50Hz |             |
| Capacity                        | Cooling        | kW                        | 1.1         | 2.2         | 2.8         | 1.1                       | 2.2         |
|                                 | Heating        |                           | 1.3         | 2.8         | 3.2         | 1.3                       | 2.8         |
| Input power                     |                | W                         |             |             |             | W                         |             |
| Airflow rate                    | High           | m³/h                      | 430         | 550         | 720         | 430                       | 550         |
|                                 | Med-H          |                           | 420         | 460         | 570         | 420                       | 460         |
|                                 | Med            |                           | 390         | 420         | 500         | 390                       | 420         |
|                                 | Med-L          |                           | 380         | 390         | 410         | 380                       | 390         |
|                                 | Low            |                           | 360         | 360         | 360         | 360                       | 360         |
|                                 | Quiet          |                           | 330         | 330         | 330         | 330                       | 330         |
| Sound pressure level            | High           | dB(A)                     | 31          | 35          | 43          | 31                        | 35          |
|                                 | Med-H          |                           | 30          | 32          | 38          | 30                        | 32          |
|                                 | Med            |                           | 28          | 30          | 34          | 28                        | 30          |
|                                 | Med-L          |                           | 26          | 27          | 29          | 26                        | 27          |
|                                 | Low            |                           | 24          | 24          | 24          | 24                        | 24          |
|                                 | Quiet          |                           | 22          | 22          | 22          | 22                        | 22          |
| Net Dimensions (H × W × D)      |                | mm                        |             |             |             | mm                        |             |
| Weight                          |                | kg(lbs)                   |             | 7.5 (17)    | 7.5 (17)    | 7.5 (17)                  | 7 (15)      |
| Connection<br>pipe diameter     | Liquid (Flare) | mm                        | 6.35        |             |             |                           | 6.35        |
|                                 | Gas (Flare)    |                           | 9.52        |             |             |                           | 9.52        |
| Drain hose diameter (I.D./O.D.) |                | 13.8/15.8 to16.7          |             |             |             | 13.8/15.8 to16.7          |             |
| EV Kit (option)                 |                | —                         |             |             |             | UTR-EV09XB                |             |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.

Voltage : 230 [V].

When ASY\*004GTAH, ASY\*007GTAH, ASY\*009GTAH are connected to the outdoor unit other than J-IIIL, gas pipe diameter should be Ø12.70.

## Wall Mounted



| Model name                      |                | ASYA012GCAH               | ASYA014GCAH | ASYE012GCAH | ASYE014GCAH |  |
|---------------------------------|----------------|---------------------------|-------------|-------------|-------------|--|
| Power source                    |                | Single-phase, ~230V, 50Hz |             |             |             |  |
| Capacity                        | Cooling        | kW                        | 3.6         | 4.0         | 3.6         |  |
|                                 | Heating        |                           | 4.0         | 4.5         | 4.0         |  |
| Input power                     |                | W                         |             |             |             |  |
| Airflow rate                    | High           | m³/h                      | 690         | 800         | 690         |  |
|                                 | Med-H          |                           | 610         | 740         | 610         |  |
|                                 | Med            |                           | 560         | 680         | 560         |  |
|                                 | Med-L          |                           | 530         | 610         | 530         |  |
|                                 | Low            |                           | 470         | 550         | 470         |  |
|                                 | Quiet          |                           | 330         | 330         | 330         |  |
| Sound pressure level            | High           | dB(A)                     | 40          | 44          | 40          |  |
|                                 | Med-H          |                           | 37          | 42          | 37          |  |
|                                 | Med            |                           | 35          | 40          | 35          |  |
|                                 | Med-L          |                           | 33          | 37          | 33          |  |
|                                 | Low            |                           | 30          | 34          | 30          |  |
|                                 | Quiet          |                           | 24          | 24          | 24          |  |
| Net Dimensions (H × W × D)      |                | mm                        |             |             |             |  |
| Weight                          |                | kg(lbs)                   |             | 8.5 (19)    | 8.5 (19)    |  |
| Connection<br>pipe diameter     | Liquid (Flare) | mm                        | 6.35        |             |             |  |
|                                 | Gas (Flare)    |                           | 9.52        |             |             |  |
| Drain hose diameter (I.D./O.D.) |                | 13.8/15.8 to16.7          |             |             |             |  |
| EV Kit (option)                 |                | —                         |             |             |             |  |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.

Voltage : 230 [V].

## Wall Mounted



| Model name                      |                | ASYA18GBCH                | ASYA24GBCH | ASYA030GTAH | ASYA034GTAH   |  |
|---------------------------------|----------------|---------------------------|------------|-------------|---------------|--|
| Power source                    |                | Single-phase, ~230V, 50Hz |            |             |               |  |
| Capacity                        | Cooling        | kW                        | 5.6        | 7.1         | 9.0           |  |
|                                 | Heating        |                           | 6.3        | 8.0         | 10.0          |  |
| Input power                     |                | W                         |            |             |               |  |
| Airflow rate                    | High           | m³/h                      | 840        | 1,100       | 1,440         |  |
|                                 | Med-H          |                           | -          | -           | 1,620 / 1,520 |  |
|                                 | Med            |                           | 770        | 910         | 1,200         |  |
|                                 | Med-L          |                           | -          | -           | 1,300         |  |
|                                 | Low            |                           | 690        | 730         | 940           |  |
|                                 | Quiet          |                           | -          | -           | 980           |  |
| Sound pressure level            | High           | dB(A)                     | 41         | 48          | 53            |  |
|                                 | Med-H          |                           | -          | -           | 49            |  |
|                                 | Med            |                           | 39         | 43          | 45            |  |
|                                 | Med-L          |                           | -          | -           | 42            |  |
|                                 | Low            |                           | 35         | 35          | 39            |  |
|                                 | Quiet          |                           | -          | -           | 33            |  |
| Net Dimensions (H × W × D)      |                | mm                        |            |             |               |  |
| Weight                          |                | kg(lbs)                   |            | 15 (33)     | 15 (33)       |  |
| Connection<br>pipe diameter     | Liquid (Flare) | mm                        | 6.35       |             |               |  |
|                                 | Gas (Flare)    |                           | 9.52       |             |               |  |
| Drain hose diameter (I.D./O.D.) |                | 12/16                     |            |             |               |  |
| EV Kit (option)                 |                | —                         |            |             |               |  |

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.

Voltage : 230 [V].

When ASYA18GBCH is connected to the outdoor unit other than J-IIIL, pipe diameter should be Ø9.52/Ø15.88 (Liq/Gas).



PRODUCT LINEUP: VRF

# VENTILATION

For LIGHT COMMERCIAL  
& RESIDENTIAL,  
COMMERCIAL



## Effective heat exchange and simultaneous fresh air ventilation


High Efficiency and low noise levels are achieved by using a highly efficient heat exchange process. A comfortable air conditioned space is achieved by conveniently selecting whether to use heat exchange or normal ventilation setting, according to the requirements of the conditioned space.

### LINEUP

| Airflow rate (m <sup>3</sup> /h)                    | 250                       | 350                          | 500                       | 800                          | 1000                      |                              |                               |                              |      |      |
|---|---------------------------|------------------------------|---------------------------|------------------------------|---------------------------|------------------------------|-------------------------------|------------------------------|------|------|
| Energy Recovery Ventilator<br>Page 182              |                           |                              |                           |                              |                           |                              |                               |                              |      |      |
| Connectable Capacity class (kW)                     | 5.0                       | 6.3                          | 8.0                       | 10.0                         | 12.5                      | 14.0                         | 20.0                          | 25.0                         | 40.0 | 50.0 |
| DX-Kit<br>for air handling applications<br>Page 184 | <br>EEV unit<br>UTP-VX30A | <br>Control unit<br>UTY-VDGX | <br>EEV unit<br>UTP-VX60A | <br>Control unit<br>UTY-VDGX | <br>EEV unit<br>UTP-VX90A | <br>Control unit<br>UTY-VDGX | <br>EEV unit<br>UTP-VX90A × 2 | <br>Control unit<br>UTY-VDGX |      |      |

182 Energy Recovery Ventilator


184 DX-Kit for Air Handling Application



## PRODUCT LINEUP: VRF-VENTILATION

### Energy Recovery Ventilator

Energy recovery ventilator unit offers maximum comfort and greater energy savings.

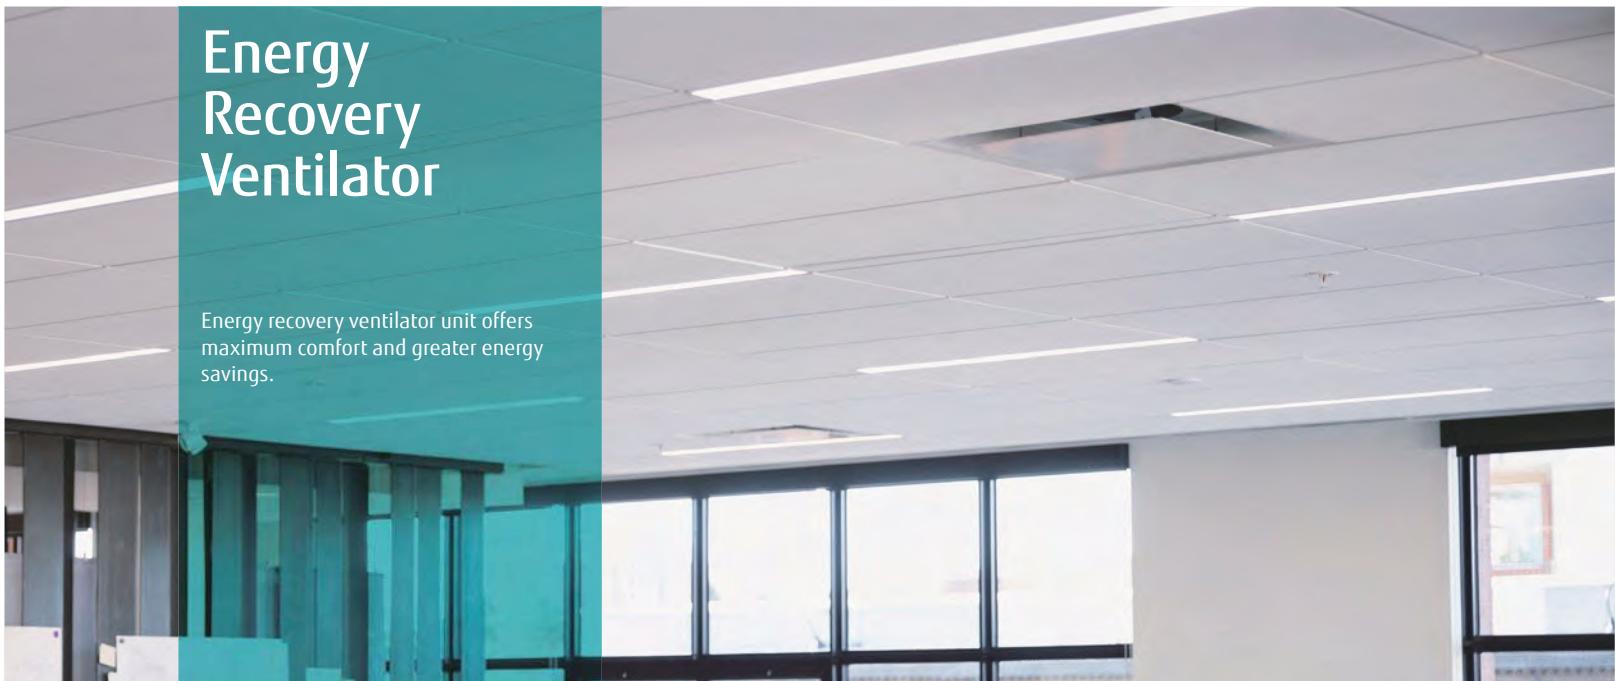


#### Heat exchange ventilation and normal ventilation

##### Heat exchange ventilation

When a room is cooled or heated, the exhausted cooling / heating energy is recovered by heat-exchange ventilation.

##### Normal ventilation


The operation is used during periods when the room space requires no cooling or heating effect, i.e. when there is minimal temperature difference between the indoor and outdoor environments.

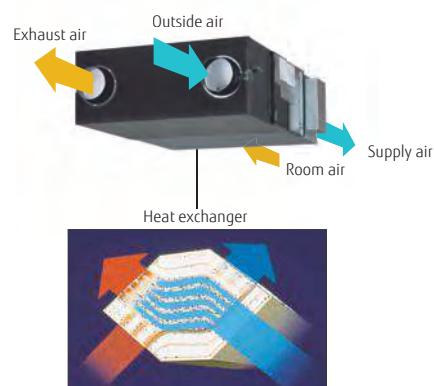

Adopts a highly efficient counter-flow heat exchange element

#### Energy efficiency and ecology

Energy consumption is dramatically reduced by using a counter-flow heat-exchange element. Air conditioning load is reduced by approximately 20%, resulting in significant energy savings. Recovers up to 77% of the heat in the outgoing air.

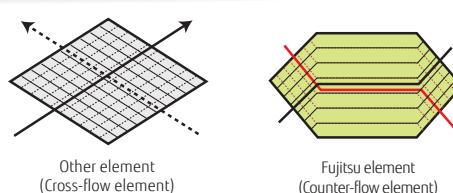

#### Features of heat exchange element

With the cross-flow element, air moves in a straight line across the element. With the counter-flow element, air flows through the element for a longer time (longer distance), so the heat-exchange effect remains unchanged.

#### Quiet operation

Significantly reducing low pressure loss and noise allows low-noise operation.

**25.5dB**  
(UTZ-BD035C)

#### Extended range of an external static pressure

An external static pressure is improved by adopting a powerful fan motor. This allows for application in a wide variety building.


#### Slim shape and easier installation

Counter-flow heat exchange element used for reduced noise and slimmer, more compact body shape.



## Reverse mountable direct air supply / exhaust system

Adoption of straight air supply / exhaust system: Duct design is simplified because the air supply / exhaust ducts are straight.  
Since each unit can be mounted in reverse position, only one inspection hole is needed for two units: Two units can share one inspection hole so duct work is easier and more flexible.

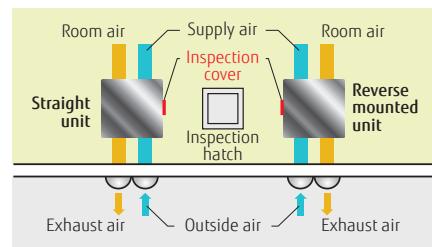

## Simple remote operation

Easy operation by connecting a liquid crystal switch

- POWER ON/OFF      • Air volume High/Low
- ON/OFF Timer      • Heat exchange/Normal Ventilation
- Clean filter display



**Model : UTZ-BD025C / UTZ-BD035C / UTZ-BD050C / UTZ-BD080C / UTZ-BD100C**




### Specifications

|                           |                                      | 250 m <sup>3</sup> /h                   | 350 m <sup>3</sup> /h | 500 m <sup>3</sup> /h | 800 m <sup>3</sup> /h | 1000 m <sup>3</sup> /h |
|---------------------------|--------------------------------------|---|-----------------------|-----------------------|-----------------------|------------------------|
| Rated flow rate           |                                      |   |                       |                       |                       |                        |
| Model No.                 |                                      | UTZ-BD025C                              | UTZ-BD035C            | UTZ-BD050C            | UTZ-BD080C            | UTZ-BD100C             |
| Power source              |                                      |   |                       | 220 - 240 V, 50Hz     |                       |                        |
| Heat Exchange Ventilation | Input power                          | (Extra high)/High/Low W                 | 128 / 123 / 96        | 190 / 185 / 175       | 289 / 225 / 185       | 418 / 378 / 295        |
|                           | Air flow rate                        | (Extra high)/High/Low m <sup>3</sup> /h | 250 / 250 / 190       | 350 / 350 / 240       | 500 / 500 / 440       | 800 / 800 / 630        |
|                           | External static pressure             | (Extra high)/High/Low Pa                | 105 / 95 / 45         | 140 / 60 / 45         | 120 / 60 / 35         | 140 / 110 / 55         |
|                           | Temperature Exchange Efficiency      | (Extra high)/High/Low %                 | 75 / 75 / 77          | 75 / 75 / 78          | 75 / 75 / 76          | 75 / 75 / 79           |
|                           | Energy Exchange Efficiency Cooling   | (Extra high)/High/Low %                 | 63 / 63 / 65          | 66 / 66 / 71          | 62 / 62 / 64          | 65 / 65 / 68           |
|                           | Energy Exchange Efficiency Heat pump | (Extra high)/High/Low %                 | 70 / 70 / 72          | 69 / 69 / 73          | 67 / 67 / 69          | 71 / 71 / 74           |
|                           | Sound pressure level                 | (Extra high)/High/Low dB*               | 31.5 / 30.5 / 26.5    | 33.0 / 31.0 / 25.5    | 37.5 / 35.5 / 32.5    | 37.5 / 37.0 / 34.5     |
| Normal Ventilation        | Input power                          | (Extra high)/High/Low W                 | 128 / 123 / 96        | 190 / 185 / 175       | 289 / 225 / 185       | 418 / 378 / 295        |
|                           | Air flow rate                        | (Extra high)/High/Low m <sup>3</sup> /h | 250 / 250 / 190       | 350 / 350 / 240       | 500 / 500 / 440       | 800 / 800 / 630        |
|                           | External static pressure             | (Extra high)/High/Low Pa                | 105 / 95 / 45         | 140 / 60 / 45         | 120 / 60 / 35         | 140 / 110 / 55         |
|                           | Sound pressure level                 | (Extra high)/High/Low dB*               | 31.5 / 30.5 / 26.5    | 33.0 / 31.0 / 25.5    | 38.5 / 38.0 / 32.5    | 37.5 / 37.0 / 34.5     |
| Dimensions                | WxDxH                                | mm                                      | 882 × 599 × 270       | 1050 × 804 × 317      | 1090 × 904 × 317      | 1322 × 884 × 388       |
| Weight                    |                                      | kg                                      | 29                    | 49                    | 57                    | 71                     |
| Outlet duct diameter      |                                      | mm                                      | 150                   | 150                   | 200                   | 250                    |
| Operation range           |                                      | °C                                      | -10 to 40             | -10 to 40             | -10 to 40             | -10 to 40              |
| Maximum humidity          |                                      | %                                       | 85                    | 85                    | 85                    | 85                     |


\* The noise level must be measured 1.5 m below the centre of the unit.

### Dimensions

(Unit : mm)

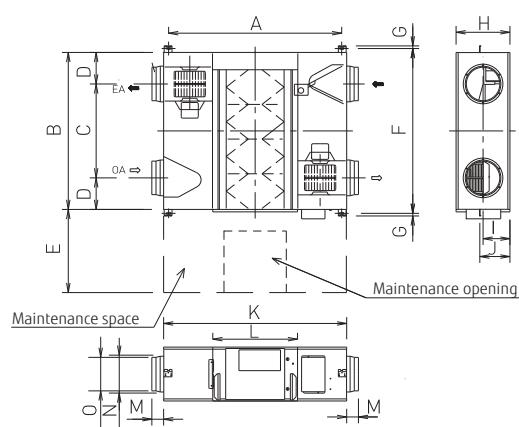


|   | UTZ-BD025C | UTZ-BD035C | UTZ-BD050C | UTZ-BD080C | UTZ-BD100B |
|---|------------|------------|------------|------------|------------|
| A | 810        | 978        | 1018       | 1250       | 1250       |
| B | 599        | 804        | 904        | 884        | 1134       |
| C | 315        | 580        | 640        | 428        | 678        |
| D | 142        | 112        | 132        | 228        | 228        |
| E | 600        | 600        | 600        | 600        | 600        |
| F | 655        | 860        | 960        | 940        | 1190       |
| G | 19         | 19         | 19         | 19         | 19         |
| H | 270        | 317        | 317        | 388        | 388        |
| I | 135        | 159        | 159        | 194        | 194        |
| J | 159        | 182        | 182        | 218        | 218        |
| K | 882        | 1050       | 1090       | 1322       | 1322       |
| L | 414        | 470        | 470        | 612        | 612        |
| M | 95         | 70         | 70         | 85         | 85         |
| N | Ø164       | Ø164       | Ø210       | Ø258       | Ø258       |
| O | Ø144       | Ø144       | Ø194       | Ø242       | Ø242       |




## PRODUCT LINEUP: VRF-VENTILATION

### DX-Kit for Air Handling Applications


These kits enable other manufacturers air handling units (AHU) and fan coil units (FCU) to be incorporated into a Fujitsu VRF system or, be connected to a dedicated Fujitsu VRF outdoor unit as a 1:1 system to control outside air ventilation (AHU) or room temperature (FCU).

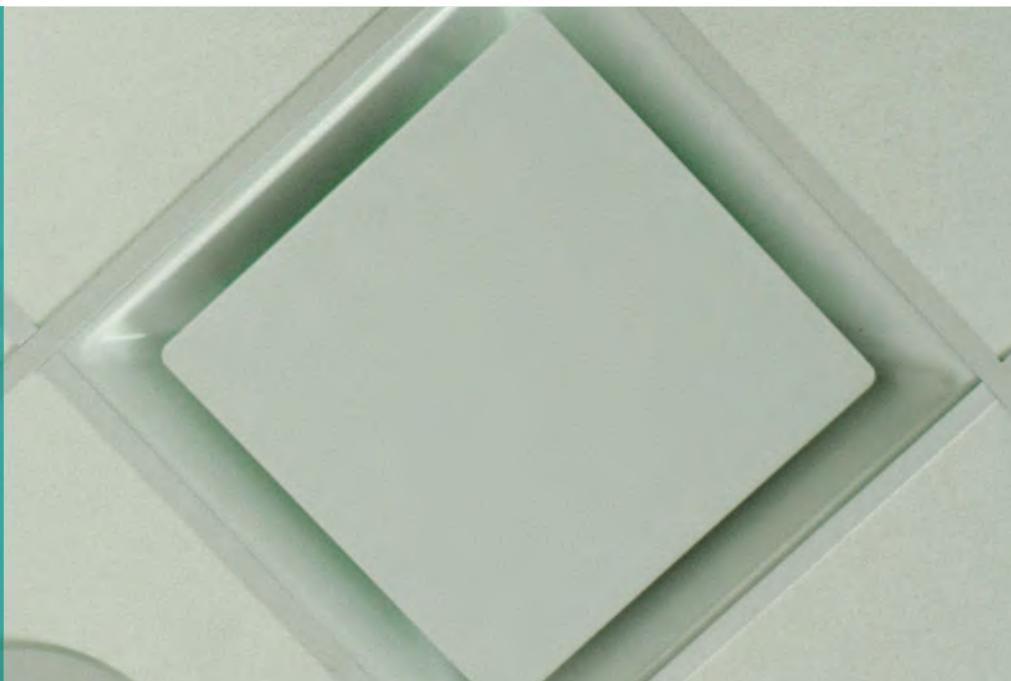

#### Multiple temperature sensors optimally control the air handling unit and fan coil unit.

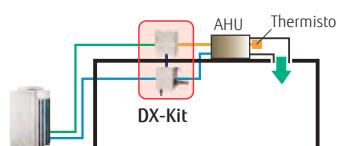


When connecting to an air handling unit, the supply air temperature is controlled by the discharge sensor.

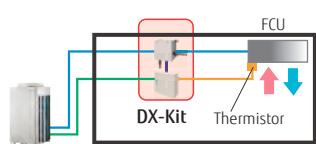


When connecting to a fan coil unit, the room temperature is controlled by the return air temperature sensor.

#### Arrangement as part of a VRF system

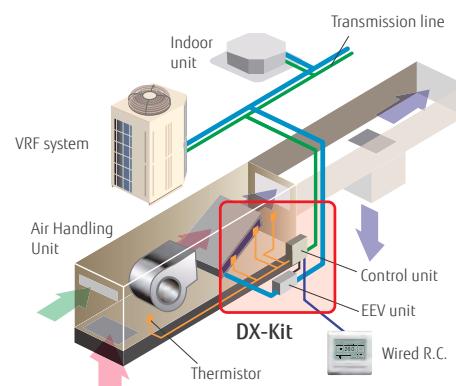


#### Supports a wide range of capacity classes

- 2 EEV units can be connected in parallel and up to 20 HP (50 kW) large capacity units. (Separation Tube of UTP-LX180A is required.)
- Connectable capacity range: 5 kW to 50 kW

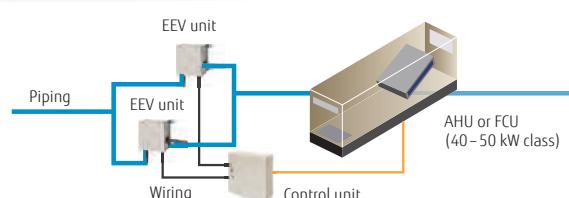


#### A variety of controls to match the application


Central control using our VRF controllers or central management controllers

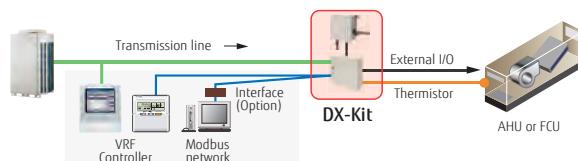

Central control from external controllers

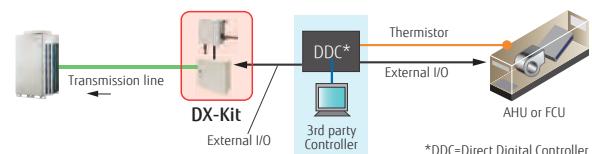

\*DDC=Direct Digital Controller



SPLIT

MULTI SPLIT

VRF

VENTILATION

OPTIONAL PARTS

AIR TO WATER

# Functions Summary

## Inputs

- ON/OFF
- Setting temperature
- Capacity demand
- Heating / Cooling operation mode
- Fault information

## Outputs

- ON/OFF indication
- Fan ON/OFF indication
- Thermo ON/OFF indication
- Defrost indication
- Fault indication

## MODBUS® Control

Possible to control via a MODBUS enabled BMS by using optional interface.

**For 2 EEV units connection (option)**  
Separation Tube: UTP-LX180A



## Installation Limitation


- Connectable VRF series: All VRF series
- Connectable DX-Kit system capacity range: 50 to 100% of the outdoor unit capacity
- Connectable DX-Kit system capacity range with indoor units: 30% or less of the outdoor unit capacity
- Max. wiring length from control unit: 10 m
- Max. piping length between EEV unit and indoor unit: 5 m
- Outdoor installation: Control unit (IP54 class) and EEV unit can be installed at an outdoor space.

### Connectable capacity


#### • Single connection



#### • Mixed connection

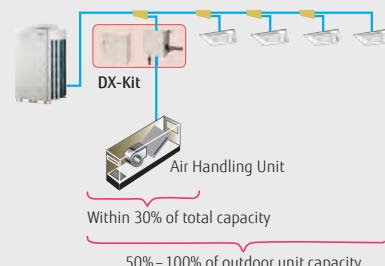

### Piping and wiring length

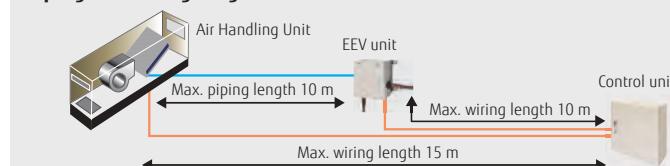

**Control unit:** UTY-VDGX

**EEV unit:** UTP-VX30A / UTP-VX60A / UTP-VX90A



## Specifications

| Connectable Capacity class        |         | 5.0 kW | 6.3 kW | 8.0 kW | 10.0 kW | 12.5 kW | 14.0 kW | 20.0 kW | 25.0 kW | 40.0 kW | 50.0 kW |
|-----------------------------------|---------|--------|--------|--------|---------|---------|---------|---------|---------|---------|---------|
| Capacity                          | Cooling | 5.6    | 6.3    | 8.0    | 10.0    | 12.5    | 14.0    | 22.4    | 25.0    | 40.0    | 50.4    |
|                                   | Heating | 6.3    | 7.1    | 9.0    | 11.2    | 14.0    | 16.0    | 25.0    | 28.0    | 45.0    | 56.5    |
| Control unit                      |         |        |        |        |         |         |         |         |         |         |         |
| Power source                      |         |        |        |        |         |         |         |         |         |         |         |
| Dimensions (H × W × D)            |         |        |        |        |         |         |         |         |         |         |         |
| EEV unit                          |         |        |        |        |         |         |         |         |         |         |         |
| Connection pipe diameter (Liquid) |         |        |        |        |         |         |         |         |         |         |         |
| Dimensions (H × W × D)            |         |        |        |        |         |         |         |         |         |         |         |

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating: Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length: 7.5 m Voltage : 230 [V].



PRODUCT LINEUP

# CONTROL SYSTEM & OPTIONAL PARTS



## CONTROL SYSTEM

- 188 CONTROL SYSTEM OVERVIEW
  - For SPLIT & MULTI SPLIT
  - For VRF
- 192 Best Control Solution for Each Property
- 194 Comparison Table of Controllers
- INDIVIDUAL CONTROL**
  - 196 Wired Remote Controller (Touch Panel)
  - 197 Wired Remote Controller
  - 199 Simple Remote Controller
  - 200 Wireless Remote Controller
    - IR Receiver Unit
- CENTRALIZED CONTROL**
  - 201 Group Remote Controller/Network Convertor
  - 202 Central Remote Controller
  - 203 Central Remote Controller
    - for 5-6 Rooms Multi, 8 Rooms Multi
  - 204 Touch Panel Controller
  - 208 System Controller
    - System Controller Lite


## CONVERTOR/ADAPTOR

- 212 BACnet® Gateway
- 213 BACnet® Gateway Hardware
  - Network Convertor for LONWORKS®
- 214 MODBUS® Convertor
- 215 MODBUS® Interface
- 216 KNX® Convertor
  - KNX® Interface
- 217 Wireless LAN Interface
- 219 External Switch Controller
  - Signal Amplifier
- 220 Network Convertor for Single Split
- 221 CONTROL SYSTEM LIST
  - For SPLIT & MULTI SPLIT
  - For VRF



## OPTIONAL PARTS

- 226 OPTIONAL PARTS OVERVIEW
  - For SPLIT & MULTI SPLIT, VRF
- 228 Auto Louver Grille Kit
- 229 OPTIONAL PARTS LIST
  - For SPLIT & MULTI SPLIT
  - For VRF
- 236 SEPARATION TUBE etc.

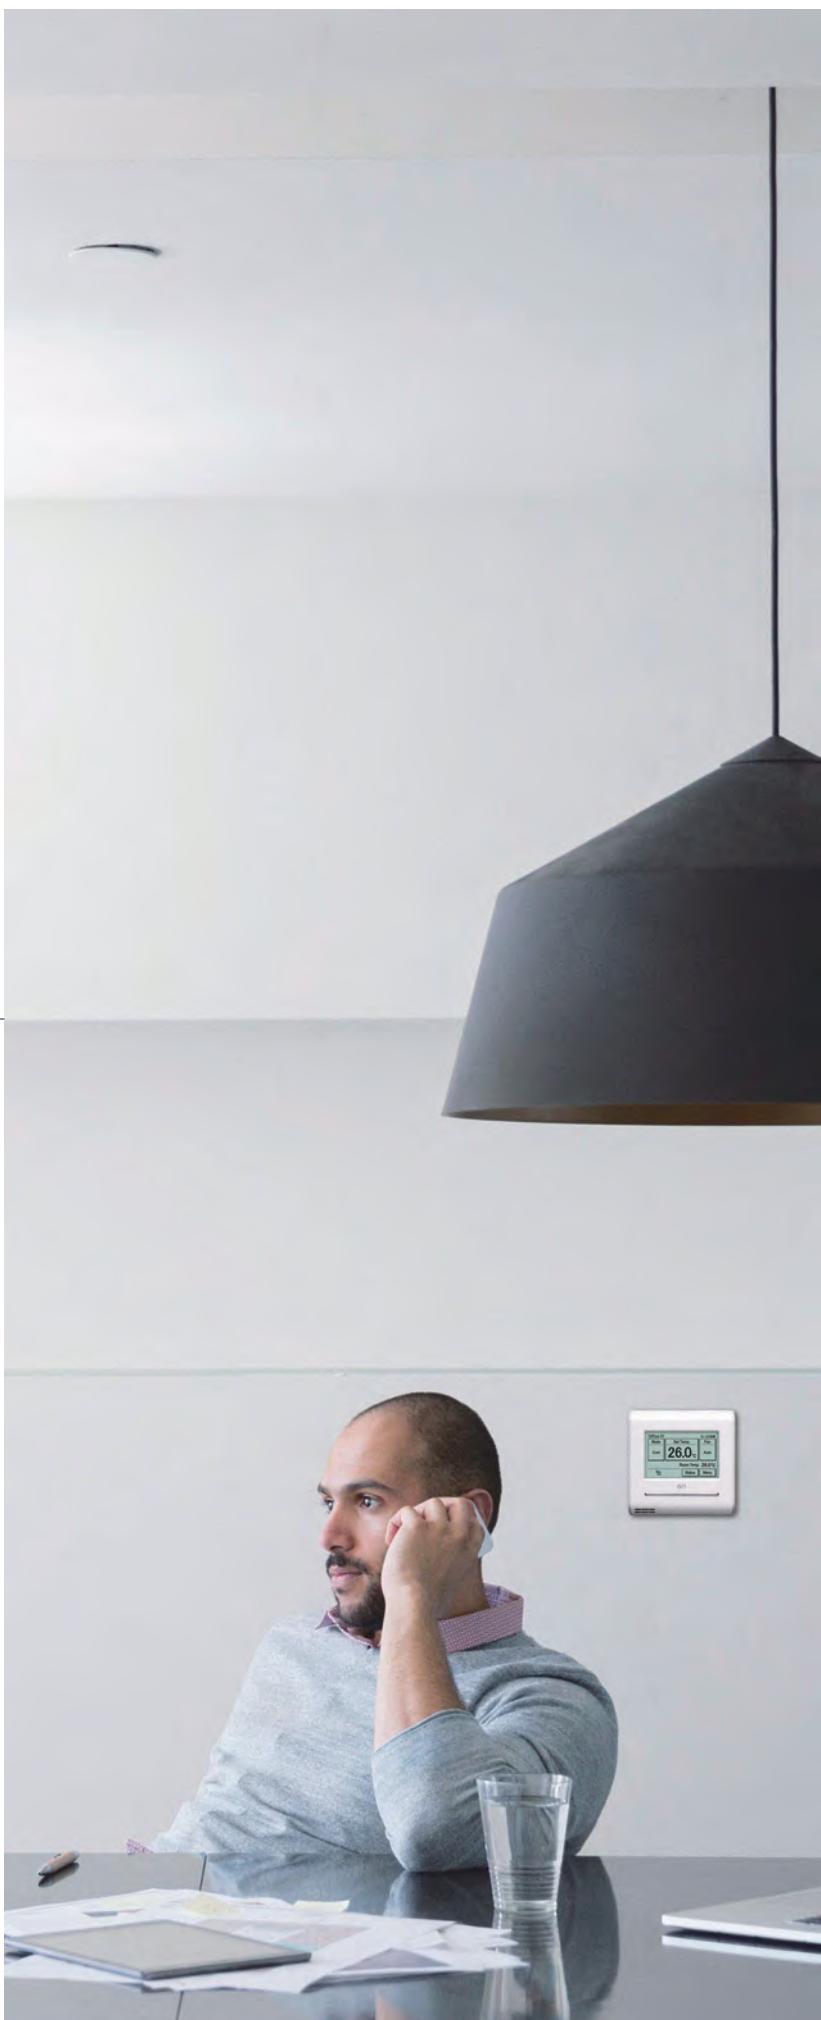

SPLIT




MULTI SPLIT



SMALL VRF



LARGE VRF



## PRODUCT LINEUP: CONTROL SYSTEM

# CONTROL SYSTEM OVERVIEW for SPLIT & MULTI SPLIT

All indoor units are provided with wireless or wired remote controllers as standard equipment. Other options, such as individual and central remote controllers, are also available. The easy-to-operate central remote controller makes it simple to control the operation mode, temperature, airflow volume, timer, and other functions of each indoor unit from a single location.

## Air Conditioning Individual Control



### Wired Remote Controller

The room temperature can be controlled by detecting the temperature accurately from the built-in sensor




### Wireless Remote Controller

Simple and sophisticated operations with a choice of 4 daily timers




### Simple Remote Controller

Compact remote controller provides access to basic functions

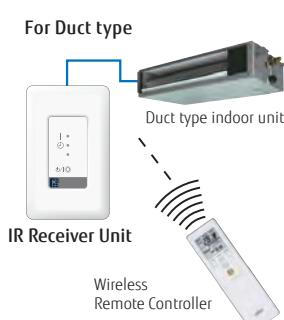

#### For Duct type

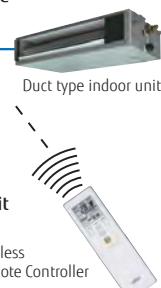

#### For Cassette type




#### IR Receiver Unit

Necessary to control for all duct type by Wireless Remote Controller



## Air Conditioning Centralized Control



### Central Remote Controller For 5-6 & 8 Rooms Multi

Central Remote Controller allows individual and central control



## Converter/Adaptor For external device

**MODBUS® Convertor**  
For indoor unit  
UTY-VMSX



**MODBUS® Interface**  
FJ-RC-MBS-1



**KNX® Convertor**  
For indoor unit  
UTY-VKSX



**KNX® Interface**  
FJ-RC-KNX-1i



## Online Control (Adopting Wireless LAN Interface)

By using our Wireless LAN Interface and FGLair app, you can control your home's cooling and heating anytime and anywhere.



**Wireless LAN Interface**  
The exclusive Wi-Fi adaptor enables to operate the air conditioner by smartphone or tablet PC from outside.



Download Free

### User friendly app

User friendly screen display facilitates easy operation.



Individual AC name display

ON/OFF button

Room temperature

Temperature setting

Operation mode

## PRODUCT LINEUP: CONTROL SYSTEM

# CONTROL SYSTEM OVERVIEW for VRF

User's needs are supported by offering a variety of controls, such as individual control, central control and building management control options.

## Air Conditioning Individual Control



**Wired Remote Controller (Touch panel)**  
UTY-RNRYZ2



**Wired Remote Controller**  
UTY-RLRY



**Simple Remote Controller**  
UTY-RSRY  
UTY-RHRY  
Without operation mode



**Wireless Remote Controller**  
UTY-LNHY



**IR Receiver Unit**  
UTB-YWC For Duct type  
UTB-YHC For Cassette type


For Duct For Cassette

## Air Conditioning Centralized Control



**System Controller Software**  
UTY-APGXZ1/UTY-ALGXZ1 (Lite edition)

\*1: USB Adaptor: Echelon® U10 USB Network Interface  
\*2: Lite edition is max. controllable 400 indoor units

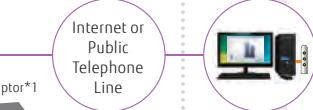


Remote/  
Monitoring side

**Max. Controllable**  
**1600**  
indoor units



**Touch Panel Controller**  
UTY-DTGYZ1

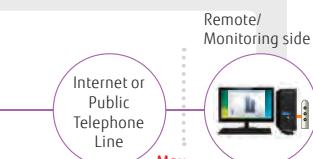

Remote/  
Monitoring side

**Max. Controllable**  
**400**  
indoor units



**Central Remote Controller**  
UTY-DCGY

**Max. Controllable**  
**100**  
indoor units




**Group Remote Controller**  
UTY-CGGY

**Max. Controllable**  
**8**  
Remote Controller Groups




**Network Convertor**  
(For Group Remote Controller)  
UTY-VGXXZ1



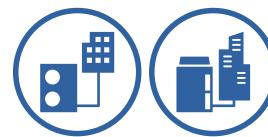

## Converter/Adaptor For external device

BACnet® Gateway  
UTY-ABGXZ1 Software




BACnet® Gateway  
UTY-VBGX Hardware



Network Convertor  
(For LONWORKS®)  
UTY-VLGX



MODBUS® Convertor  
UTY-VMGX



MODBUS® Interface  
FJ-RC-MBS-1



KNX® Convertor For VRF  
UTY-VKGX



KNX® Interface  
FJ-RC-KNX-1i



Wireless LAN Interface  
FJ-RC-WIFI-1



External Switch Controller  
UTY-TERX



**Card-key**  
(Locally purchased)

Internet device

BMS/BAS<sup>\*3</sup>



BMS, Home automation system



or

\*3: BMS/BAS: Building Management System/Building Automation System

## Converter/Adaptor For system expansion

Network Convertor  
(DC power supply)  
UTY-VTGX



Single split


Network Convertor  
(AC power supply)  
UTY-VTGXV



Single split

Signal Amplifier  
UTY-VSGXZ1





## PRODUCT LINEUP: CONTROL SYSTEM

# Best Control Solution for Each Property

Fujitsu General provides the best control solutions suitable for the various properties.

### SHOP

| Type   | Individual Control   | Centralized Control                 |                                       |                                      |  | Integrating Control (Interface)             |  |   |
|--|--|-------------------------------------|---------------------------------------|--------------------------------------|--|---|--|---|
|  |  |                                     |                                       |                                      |  |   |  |   |
|  | Wired Remote Controller<br>UTY-RNRYZ2,<br>UTY-RLRY,<br>UTY-RVNYM | Group Remote Controller<br>UTY-CGGY | Central Remote Controller<br>UTY-DCGY | Touch Panel Controller<br>UTY-DTGYZ1 | System Controller<br>UTY-APGXZ1,<br>UTY-ALGXZ1 | Network Convertor for LonWORKS®<br>UTY-VLGX | MODBUS® Convertor<br>UTY-VMSX,<br>UTY-VMGX | KNX® Convertor<br>UTY-VKGX,<br>UTY-VKSX |
| Automatic control of A/C<br>(Schedule timer, Weekly timer etc.)                    | ●  | ●                                   | ●                                     | ●                                    | ●  |   |  |   |
| Limited control for staff<br>(RC Prohibition, Room temp set point limitation etc.) |  |                                     | ●                                     | ●                                    | ●  | ●   | ●  | ●                                       |
| Group Control  |  | ●                                   | ●                                     | ●                                    | ●  |   |  |   |
| Advanced Energy Saving<br>(Peak cut, Indoor unit rotation operation etc.)          |  |                                     |                                       |                                      | ●  |   |  |   |
| Remote Management  |  |                                     |                                       | ●                                    | ●  |   |  |   |
| Manage multiple sites  |  |                                     |                                       | ●                                    | ●  |   |  |   |
| Monitor energy consumption   |  |                                     |                                       |                                      | ●  |   |  |   |
| Control third party products   |  |                                     |                                       |                                      | ●  |   |  |   |
| Integrate FGL A/C into BMS   |  |                                     |                                       |                                      |  | ●   | ●  | ●                                       |

### HOTEL

| Type  | Individual Control   |   |  | Centralized Control                 |                                       |                                      |  | Integrating Control (Interface)            |   |  |   |  |
|---|--|---|--|-------------------------------------|---------------------------------------|--------------------------------------|--|--|---|--|---|--|
|   |  |   |  |                                     |                                       |                                      |  |  |   |  |   |  |
|   | Wired Remote Controller<br>UTY-RNRYZ2,<br>UTY-RLRY,<br>UTY-RVNYM | Simple Remote Controller<br>UTY-RSRY,<br>UTY-RHRY,<br>UTY-RSNYM | Wireless Remote Controller<br>UTY-LNHY | Group Remote Controller<br>UTY-CGGY | Central Remote Controller<br>UTY-DCGY | Touch Panel Controller<br>UTY-DTGYZ1 | System Controller<br>UTY-APGXZ1,<br>UTY-ALGXZ1 | BACnet® Gateway<br>UTY-ABGXZ1,<br>UTY-VBGX | Network Convertor for LonWORKS®<br>UTY-VLGX | MODBUS® Convertor<br>UTY-VMSX,<br>UTY-VMGX | KNX® Convertor<br>UTY-VKGX,<br>UTY-VKSX | External Switch Controller<br>UTY-TERX |
| Local control for hotel guest   | ●  | ●   | ●                                      |                                     |                                       |                                      |  |  |   |  |   |  |
| Centralized A/C control for common space                                  |  |   |  | ●                                   | ●                                     | ●                                    | ●  | ●  | ●   | ●  | ●                                       | ●                                      |
| Limited control for hotel guests  |  |   |  |                                     | ●                                     | ●                                    | ●  | ●  | ●   | ●  | ●                                       | ●                                      |
| Remote Management   |  |   |  |                                     |                                       | ●                                    | ●  |  |   |  |   |  |
| Advanced Energy Saving<br>(Peak cut, Indoor unit rotation operation etc.) |  |   |  |                                     |                                       |                                      | ●  | ●  |   |  |   |  |
| Monitor energy consumption  |  |   |  |                                     |                                       |                                      | ●  |  |   |  |   |  |
| Control third party products  |  |   |  |                                     |                                       |                                      | ●  |  |   |  |   |  |
| Integrate FGL A/C into BMS  |  |   |  |                                     |                                       |                                      |  | ●  | ●   | ●  | ●                                       |  |
| Interlock with window contact   |  |   |  |                                     |                                       |                                      |  |  |   |  |   | ●                                      |
| Interlock with key-card   |  |   |  |                                     |                                       |                                      |  |  |   |  |   | ●                                      |

## OFFICE

| Type  | Individual Control  |   |   | Centralized Control   |   |   |   | Integrating Control (Interface)   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
|   |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Wired Remote Controller   | Simple Remote Controller  | Wireless Remote Controller  | Group Remote Controller   | Central Remote Controller   | Touch Panel Controller  | System Controller   | BACnet® Gateway   | Network Convertor for LonWORKS®   | MODBUS® Convertor   | KNX® Convertor  | External Switch Controller  |   |   |
| UTY-RNRYZ2,<br>UTY-RLRY   | UTY-RSRY,<br>UTY-RHRY,<br>UTY-RSNYM   | UTY-LNHY  | UTY-CGGY  | UTY-DCGY  | UTY-DTGYZ1  | UTY-APGXZ1,<br>UTY-ALGXZ1   | UTY-ABGXZ1,<br>UTY-VBGX   | UTY-VLGX  | UTY-VMSX,<br>UTY-VMGX   | UTY-VKGX,<br>UTY-VKSX   | UTY-TERX  |   |   |
| Local control for office staff  | •   | •   | •   | •   | •   |   |   |   |   |   |   |   |   |
| Automatic control of A/C<br>(Schedule timer, Weekly timer etc.)                           | •   |   | •   | •   | •   | •   | •   | •   |   |   |   |   |   |
| Centralized A/C control for management  |   |   |   |   | •   | •   | •   | •   | •   | •   | •   |   |   |
| Limited control for office staff<br>(RC Prohibition, Room temp set point limitation etc.) |   |   |   |   | •   | •   | •   | •   | •   | •   | •   |   |   |
| Advanced Energy Saving<br>(Peak cut, Indoor unit rotation operation etc.)                 |   |   |   |   |   | •   | •   |   |   |   |   |   |   |
| Remote Management   |   |   |   |   |   | •   | •   |   |   |   |   |   |   |
| Energy Charge Apportionment   |   |   |   |   |   | •   | •   | •   |   |   |   |   |   |
| Monitor energy consumption  |   |   |   |   |   |   | •   |   |   |   |   |   |   |
| Control third party products  |   |   |   |   |   |   | •   |   |   |   |   |   |   |
| Integrate FGL A/C into BMS  |   |   |   |   |   |   |   | •   | •   | •   | •   |   |   |
| Interlock with door contact   |   |   |   |   |   |   |   |   |   |   |   | •   |   |
| Interlock with human sensor for meeting room  |   |   |   |   |   |   |   |   |   |   |   | •   |   |


## PRODUCT LINEUP: CONTROL SYSTEM

# Comparison Table of Controllers

| Item                                       |  |                                   |                         |                          |                          |  |
|--|--|-----------------------------------|-------------------------|--------------------------|--------------------------|--|
|  | Wired Remote Controller (Touch panel)  | Wired Remote Controller           | Wired Remote Controller | Simple Remote Controller | Simple Remote Controller | Simple Remote Controller* <sup>1</sup> |
| Model name                                 | UTY-RNRYZ2                             | UTY-RLRY                          | UTY-RVNYM               | UTY-RSNYM                | UTY-RSRY                 | UTY-RHRY                               |
| Max. controllable remote controller groups | 1                                      | 1                                 | 1                       | 1                        | 1                        | 1                                      |
| Max. controllable indoor units             | 16                                     | 16                                | 16                      | 16                       | 16                       | 16                                     |
| Max. controllable groups                   | —                                      | —                                 | —                       | —                        | —                        | —                                      |
| Air conditioning control function          | On / Off                               | ●                                 | ●                       | ●                        | ●                        | ●                                      |
|  | Operation mode setting                 | ●                                 | ●                       | ●                        | ●                        | —                                      |
|  | Fan speed setting                      | ●                                 | ●                       | ●                        | ●                        | ●                                      |
|  | Room temp. setting                     | ●                                 | ●                       | ●                        | ●                        | ●                                      |
|  | Room temp. set point limitation        | ●                                 | ●                       | ●                        | —                        | ●                                      |
|  | Test operation                         | ●                                 | ●                       | ●                        | ●                        | ●                                      |
|  | Up/down air direction flap setting     | ●                                 | ●                       | ●                        | —                        | ●                                      |
|  | Right/left air direction flap setting  | ●                                 | ●                       | ●                        | —                        | —                                      |
|  | Individual louver control              | ●                                 | —                       | —                        | —                        | —                                      |
|  | Group setting                          | —                                 | —                       | —                        | —                        | —                                      |
|  | RC prohibition                         | —                                 | —                       | —                        | —                        | —                                      |
|  | Anti freeze setting                    | ●                                 | —                       | —                        | —                        | —                                      |
|  | Set temp. auto return                  | ●                                 | ●                       | ●                        | —                        | —                                      |
|  | Economy mode setting                   | ●                                 | ●                       | ●                        | —                        | —                                      |
|  | Human sensor control                   | ●                                 | —                       | —                        | —                        | —                                      |
|  | Error                                  | ●                                 | ●                       | ●                        | ●                        | ●                                      |
| Display                                    | Defrosting                             | ●                                 | ●                       | ●                        | ●                        | ●                                      |
|  | Current time                           | ●                                 | ●                       | ●                        | —                        | —                                      |
|  | Day of week                            | ●                                 | ●                       | ●                        | —                        | —                                      |
|  | R.C. prohibition                       | ●                                 | ●                       | ●                        | ●                        | ●                                      |
|  | Cooling/heating priority               | ●                                 | ●                       | —                        | ●                        | ●                                      |
|  | Address display                        | ●                                 | ●                       | ●                        | ●                        | ●                                      |
|  | Room temp                              | ●                                 | —                       | ●                        | —                        | ●                                      |
|  | Multi language                         | ●                                 | —                       | ●                        | —                        | —                                      |
|  | Summer time                            | ●                                 | —                       | ●                        | —                        | —                                      |
|  | Name registration                      | ●                                 | —                       | —                        | —                        | —                                      |
|  | Backlight                              | ●                                 | —                       | ●                        | ●                        | ●                                      |
|  | 2D floor layout / 3D building display  | —                                 | —                       | —                        | —                        | —                                      |
|  | Refrigerant leakage detection function | —                                 | —                       | —                        | —                        | —                                      |
| Timer                                      | Schedule timer                         | Period                            | Week                    | Week                     | Week                     | —                                      |
|  |  | On/off, Temp, Mode, Times per day | 8                       | 4                        | 8                        | —                                      |
|  | On/off timer                           | ●                                 | ●                       | ●                        | —                        | —                                      |
|  | Sleep timer                            | —                                 | —                       | —                        | —                        | —                                      |
|  | Program timer                          | —                                 | —                       | —                        | —                        | —                                      |
|  | Auto off timer                         | ●                                 | ●                       | ●                        | —                        | —                                      |
|  | Day off                                | ●                                 | ●                       | ●                        | —                        | —                                      |
|  | Min. unit of timer setting (Minutes)   | 10 • 30                           | 30                      | 30                       | —                        | —                                      |
| Control                                    | Status monitoring system               | —                                 | —                       | —                        | —                        | —                                      |
|  | Electricity charge apportionment       | —                                 | —                       | —                        | —                        | —                                      |
|  | Error history                          | ●                                 | ●                       | ●                        | —                        | —                                      |
|  | Emergency stop                         | —                                 | —                       | —                        | —                        | —                                      |
|  | Remote management                      | —                                 | —                       | —                        | —                        | —                                      |
|  | Energy saving management               | —                                 | —                       | —                        | —                        | —                                      |
|  | E-mail notification for malfunction    | —                                 | —                       | —                        | —                        | —                                      |
|  | Key lock                               | Child lock                        | Child lock              | Child lock               | —                        | —                                      |
|  | Low noise mode                         | —                                 | —                       | —                        | —                        | —                                      |

| Wireless Remote Controller | Central Remote Controller (For 8 rooms Multi) | Group Remote Controller | Central Remote Controller | Touch Panel Controller | System Controller Lite (Software) | System Controller (Software) |
|----------------------------|---|-------------------------|---------------------------|------------------------|-----------------------------------|------------------------------|
| UTY-LNHY                   | UTY-DMMYM                                     | UTY-CGGY                | UTY-DCGY                  | UTY-DTGYZ1             | UTY-ALGX1                         | UTY-APGX1                    |
| 1                          | 1   | 8                       | 100                       | 400                    | 400                               | 1600                         |
| 16                         | 8   | 128                     | 100                       | 400                    | 400                               | 1600                         |
| -                          | -   | -                       | 16                        | 400                    | 400                               | 1600                         |
| ●                          | ●   | ●                       | ●                         | ●                      | ●                                 | ●                            |
| ●                          | ●   | ●                       | ●                         | ●                      | ●                                 | ●                            |
| ●                          | ●   | ●                       | ●                         | ●                      | ●                                 | ●                            |
| ●                          | ●   | ●                       | ●                         | ●                      | ●                                 | ●                            |
| ●                          | ●   | ●                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | ●                         | ●                      | ●                                 | ●                            |
| ●                          | -   | -                       | ●                         | ●                      | -                                 | -                            |
| ●                          | -   | -                       | ●                         | ●                      | ●                                 | ●                            |
| ●                          | -   | -                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | -                         | ●                      | -                                 | -                            |
| -                          | -   | -                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | -                         | ●                      | -                                 | -                            |
| ●                          | ●   | -                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | ●   | -                       | -                         | ●                      | ●                                 | ●                            |
| -                          | ●   | ●                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | ●                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | -                         | ●                      | -                                 | -                            |
| -                          | -   | -                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | -                         | ●                      | -                                 | -                            |
| -                          | -   | -                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | -                         | ●                      | -                                 | -                            |
| -                          | Week  | Week                    | Week                      | Year                   | Year                              | Year                         |
| -                          | 4   | 4                       | 20                        | 20                     | 144                               | 144                          |
| ●                          | -   | -                       | -                         | -                      | -                                 | -                            |
| ●                          | -   | -                       | -                         | -                      | -                                 | -                            |
| ●                          | -   | -                       | -                         | -                      | -                                 | -                            |
| -                          | -   | -                       | -                         | ●                      | -                                 | -                            |
| -                          | ●   | -                       | ●                         | ●                      | ●                                 | ●                            |
| 5                          | 5   | 10                      | 10                        | 10                     | 10                                | 10                           |
| -                          | -   | -                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | -                         | ○                      | ○                                 | ●                            |
| -                          | -   | ●                       | ●                         | ●                      | ●                                 | ●                            |
| -                          | -   | -                       | ●* <sup>2</sup>           | ●* <sup>2</sup>        | -                                 | -                            |
| -                          | -   | -                       | -                         | ●                      | ○                                 | ●                            |
| -                          | -   | -                       | -                         | -                      | ○                                 | ○                            |
| -                          | -   | -                       | -                         | ●                      | ●                                 | ●                            |
| -                          | Child lock                                    | Child lock              | Password setting          | Password setting       | Password setting                  | Password setting             |
| -                          | ●   | -                       | -                         | ●                      | -                                 | -                            |

\*1 "Operation mode" setting is not available for this model. \*2 This function is available only through external input control. ●: Supported ○: Optional function -: Not supported yet



## PRODUCT LINEUP: CONTROL SYSTEM-INDIVIDUAL CONTROL

### Wired Remote Controller (Touch Panel)

UTY-RNRYZZ



Max. Controllable  
**16** indoor units

#### Easy operation by high-definition large STN-LCD touch panel screen

- Easy finger touch operation with LCD panel
- Built-in weekly/Daily timer (ON/OFF, Temp., Mode)
- Backlight enables easy operation in a darkened room
- Room temperature display
- Control up to 16 indoor units
- Corresponds to 12 different languages (English, Chinese, French, German, Spanish, Russian, Polish, Italian, Greek, Portuguese, Turkish and Dutch)
- 2-wire type

#### High performance and compact size

In addition to the individual control, weekly timer, and various energy saving controls can be realized using one remote controller only.



#### Accurate and comfortable control

Indoor temperature can be detected accurately by the inclusion of a thermo sensor in the body of the wired controller.




#### Various energy saving control

##### Custom Auto

- Maintains 2 separate set points for heating and cooling.
- Automatically changes mode between heating and cooling.


\* This function is not available for some models.

Cooling set temp. 27°C, Heating set temp. 26°C

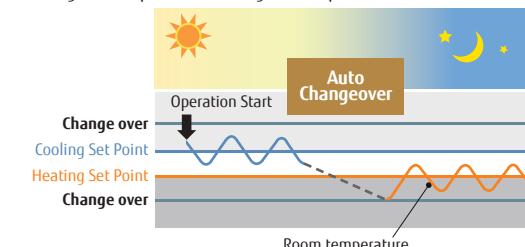

##### Auto OFF timer

- The indoor unit automatically is turned off when it reaches to the preset operating time frame.
- The time frame of the "Auto off timer" can be flexibly scheduled.
- Can be set off time 30 to 240 minutes

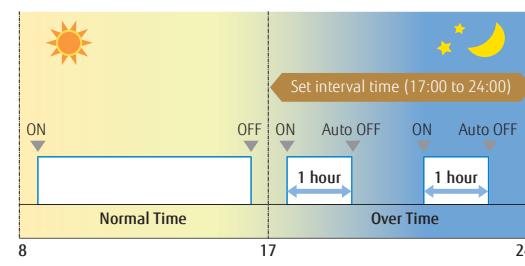

##### 2 schedules Weekly Timer


##### Set Temperature Auto Return

##### Set Temperature Upper and Lower Limit Setting

#### Specifications

|                             |                  |
|-----------------------------|------------------|
| Model name                  | UTY-RNRYZZ       |
| Power Source                | DC 12 V          |
| Dimensions (H × W × D) (mm) | 120 × 120 × 20.4 |
| Weight (g)                  | 220              |

DC 12 V is supplied by the indoor unit.



# Wired Remote Controller

UTY-RVNYM




Max. Controllable  
**16** indoor units

## Hi-grade individual control using various functions.

- 3.7-inch LCD backlight screen.
- Supporting various Energy Saving functions with simple operation.
- Multiple Language Support.  
(English, German, French, Spanish, Russian, Portuguese, Italian, Greek, and Turkish)

## High visibility and Easy operation

- Icon display of effectual functions.
- Main functions in large icons: "Mode", "Set Temp", and "Fan".
- Easy to operate by Control guide display.
- Simple operation with easy 4-way navigation pad.

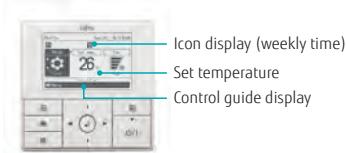

## High performance and compact size

- In addition to the individual control, various energy saving controls can be realized using only one remote controller.




## Various energy saving control

### Weekly Timer function

- Can be set up to 8 times per day (On/Off, mode,Temp)
- 2 pattern settings(i.e. Summer/Winter setting) are available.

### Auto OFF Timer


- Set Temperature Auto Return
- Set Temperature Upper and Lower Limit Setting

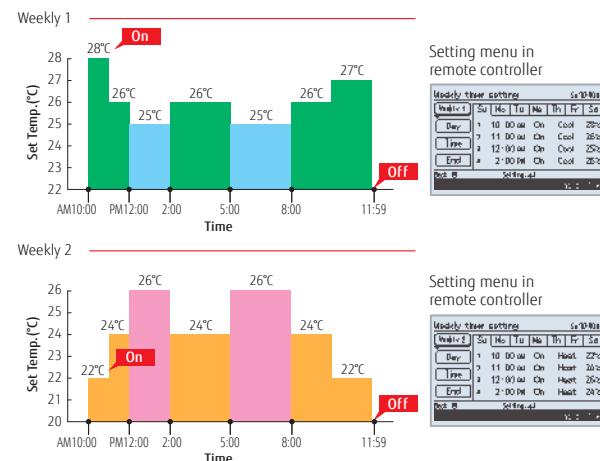

## Specifications

|                             |                  |
|-----------------------------|------------------|
| Model name                  | UTY-RVNYM        |
| Power Source                | DC 12 V          |
| Dimensions (H × W × D) (mm) | 120 × 120 × 21.3 |
| Weight (g)                  | 220              |

DC 12 V is supplied by the indoor unit.



## PRODUCT LINEUP: CONTROL SYSTEM-INDIVIDUAL CONTROL

### Wired Remote Controller

UTY-RRLY



Max. Controllable  
**16** indoor units

- Various timer setup (ON / OFF / WEEKLY) are possible.
- The room temperature can be controlled by detecting the temperature accurately with Built-in thermo sensor.
- When a failure occurs, the error code is displayed.
- Error history. (Last 16 error codes can be accessed.)
- 2-wire type


#### High performance and compact size

In addition to the individual control, weekly timer, and various energy saving controls can be realized using only one remote controller.



#### High visibility and easy operation

- "Mode", "Set Temp", and "Fan" are displayed at large size on the top screen.
- Each function to be set is indicated by an icon.
- Control guide is displayed and operation is simple and straightforward.

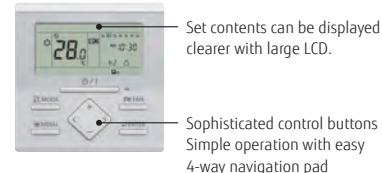

### Wired Remote Controller

UTY-RNNYM




Max. Controllable  
**16** indoor units

- Simple operation with Built-in Weekly / Daily Timer.
- Control up to 16 indoor units.
- Up to 2 wired remote controllers can be connected to a single indoor unit.

#### Accurate and comfortable

Indoor temperature can be detected accurately by the inclusion of a thermo sensor in the body of the wired controller. This new wired remote controller and the optional remote sensor allows flexibility in sensor location, suitable for all requirements.

#### Example of changing sensor

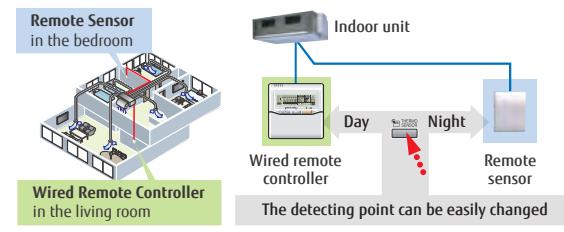

Displayed temperature is set temperature.

#### Built-in timers

**Weekly timer:** Possible to set ON/OFF time to operate twice each day of the week.


**Setback timer:** Possible to set temperature for two times spans and for each day of the week.

At "Weekly timer" + "Set back timer" setup

#### Specifications

| Model name                  | UTY-RRLY       | UTY-RNNYM      |
|-----------------------------|----------------|----------------|
| Power Source                | DC 12 V        | DC 12 V        |
| Dimensions (H × W × D) (mm) | 120 × 120 × 17 | 120 × 120 × 18 |
| Weight (g)                  | 170            | 160            |

DC 12 V is supplied by the indoor unit.



# Simple Remote Controller



UTY-RSRY / UTY-RHRY (Without operation mode)



Max. Controllable  
**16** indoor units

## Compact remote controller provides access to basic functions

- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Stylish design: Simple design to match the stylish interior.
- Large LCD screen & simple operation buttons
- Backlight: White colored backlight on monitor enable easy operation in dark.
- 2-wire type

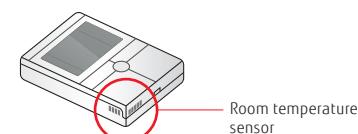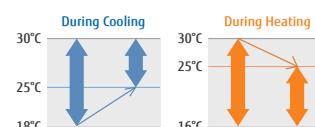

# Simple Remote Controller

UTY-RSNYM, UTY-RSKY/UTY-RHKY(Without operation mode)



Max. Controllable  
**16** indoor units

## Compact remote controller provides access to basic functions

- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Backlight enables easy operation in a darkened room.
- 3-wire type


## Easy-to-use operation

- Provides access to basic operations, such as Start / Stop, Fan control, Operation mode switching, and Room temperature setting.
- A large On / Off button is provided in the centre of the remote controller for easy operation.
- Can be used jointly with other individual control unit.
- Following an error display, diagnostics can be carried out on the controller.

### Specifications

| Model name                  | UTY-RSRY        | UTY-RHRY        | UTY-RSNYM, UTY-RSKY | UTY-RHKY      |
|-----------------------------|-----------------|-----------------|---------------------|---------------|
| Power Source                | DC 12 V         | DC 12 V         | DC 12 V             | DC 12 V       |
| Dimensions (H × W × D) (mm) | 120 × 75 × 19.4 | 120 × 75 × 19.4 | 120 × 75 × 19.4     | 120 × 75 × 14 |
| Weight (g)                  | 120             | 120             | 120                 | 90            |

DC 12 V is supplied by the indoor unit.



## PRODUCT LINEUP: CONTROL SYSTEM-INDIVIDUAL CONTROL

### Wireless Remote Controller

UTY-LNHY



Max. Controllable  
**16** indoor units  
Selectable  
**4** daily timers

#### Simple and sophisticated operations with a choice of 4 daily timers

- A single controller controls up to 16 indoor units.

#### Built-in timers

4 timer programs: On / Off / Program / Sleep

Program timer: Operates ON/OFF timer once within 24 hours

Sleep timer: Corrects the set temperature automatically during sleep time

#### Easy installation and operation

Code selector switch prevents indoor unit mix-up (up to 4 codes)

Wide and precise transmitting range

### IR Receiver Unit

UTB-YWC / UTY-LRHYM / UTY-LBTYM



**UTB-YWC**  
for VRF



**UTY-LRHYM**  
for Split



**UTY-LBTYM**  
for Split



**Duct type\* indoor units can be controlled with Wireless Remote Controller**

\*Only Large Airflow Duct can not be connected to IR Receiver Unit.

### IR Receiver Unit

UTY-LRHYP1 / UTY-LBHXD / UTY-LRHYA2 / UTY-LBTYC



**UTY-LRHYP1**  
for VRF



**UTY-LBHXD**  
for VRF



**UTY-LRHYA2**  
for Split



**UTY-LBTYC**  
for Split



**Cassette type indoor unit can be controlled with Wireless Remote Controller**

#### Specifications

| Model name                  | UTY-LNHY                     | UTB-YWC/UTY-LRHYM/UTY-LBTYM | UTY-LRHYP1/UTY-LBHXD<br>UTY-LRHYA2/UTY-LBTYC |
|-----------------------------|------------------------------|-----------------------------|--|
| Battery                     | 1.5 V (R03 / LR03 / AAA) × 2 | DC 5 V                      | DC 5 V                                       |
| Dimensions (H × W × D) (mm) | 170 × 56 × 19                | 145 × 90 × 30               | 193.9 × 193.9 × 31.2                         |
| Weight (g)                  | 85                           | 150                         | 140  |

DC 12 V is supplied by the indoor unit.



## CONTROL SYSTEM-CENTRALIZED CONTROL

# Group Remote Controller/Network Convertor

UTY-CGGY / UTY-VGGXZ1



Group Remote Controllers  
UTY-CGGY



Network Convertor  
UTY-VGGXZ1  
For Group Remote Controller

Max. Controllable  
**8**  
remote  
controller groups


Max. Controllable  
**64**  
group R.C. in a VRF  
network system

### Group control of indoor units with simple operation

- Up to 8 remote controller groups can be controlled by one Group Remote Controller.
- Up to 64 Group Remote Controllers can be connected in one VRF network system.
- Network Convertor is required to connect Group Remote Controllers to a VRF network system. (Network Convertor allows up to 4 Group Remote Controllers)
- 3-wire type

### Control up to 8 remote controller groups

- Single Group Remote Controller controls and monitors up to 8 remote controller groups.

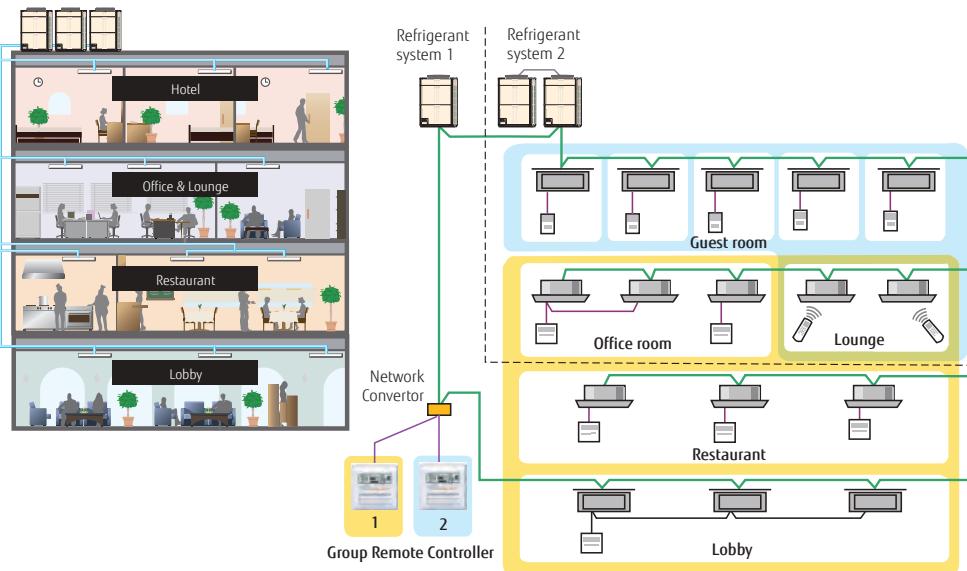

Group Remote Controller 1:  
To control office room, lounge, restaurant and lobby (8 remote controller groups)  
Group Remote Controller 2:  
To control guest room and lounge (7 remote controller groups)

### High performance and compact size

ON / OFF, Operating mode, Room temperature and Fan speed setting can be controlled / monitored centrally or individually.



### Built-in weekly timers

The weekly timer is provided as a standard function.

#### Specifications

| Model name                  | UTY-CGGY       |
|-----------------------------|----------------|
| Power Supply                | DC 12 V        |
| Dimensions (H × W × D) (mm) | 120 × 120 × 18 |
| Weight (g)                  | 200            |

DC 12 V is supplied by the indoor unit.

| Model name                  | UTY-VGGXZ1                       |
|-----------------------------|----------------------------------|
| Power Supply                | 208-240 V 50/60 Hz, Single phase |
| Power Consumption (W)       | 6.5                              |
| Dimensions (H × W × D) (mm) | 67 × 288 × 211                   |
| Weight (g)                  | 1,500                            |

## PRODUCT LINEUP: CONTROL SYSTEM-CENTRALIZED CONTROL

# Central Remote Controller

UTY-DCGY



Max. Controllable  
**100** indoor units


Max. Controllable  
**16** groups

### For small- and medium-sized buildings and tenants

- Individual control and monitor of 100 indoor units
- 5 inch TFT color screen
- High visibility and easy operation
- External input / output contact
- Detachable power supply unit
- Corresponds to 7 different languages like English, Chinese, French, German, Spanish, Russian, Polish.



### System overview

- It allows multiple indoor units grouping (Max.16 groups controlled)
- Interlock with external device

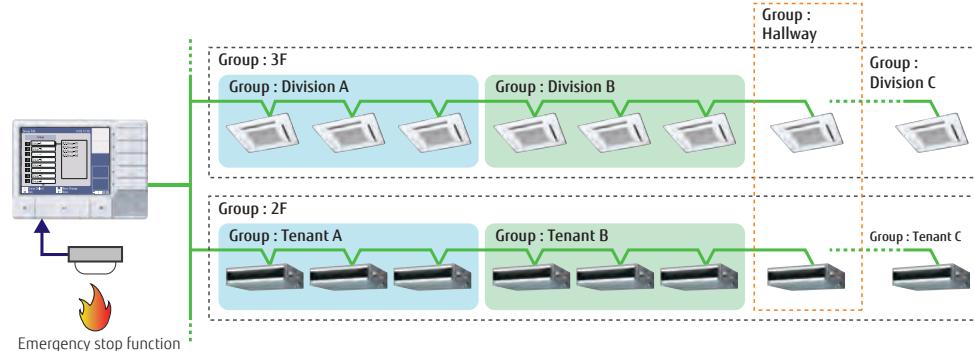

### Easy Installation

- The control panel and power supply unit can be installed separately.
- For flexibility in installation, the Control panel can be built into the wall or fix on the wall.

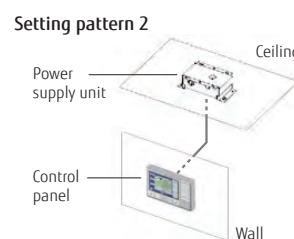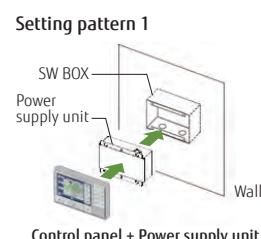

### Functions

- Diverse control of indoor units
- Weekly timer
- Automatic clock adjustment
- Error history

#### Specifications

| Model name                  | UTY-DCGY         |                                   |
|-----------------------------|------------------|-----------------------------------|
|                             | Control Panel    | Power Supply Unit                 |
| Power Supply                | DC 5 V           | 100-240 V, 50-60 Hz, Single phase |
| Dimensions (H × W × D) (mm) | 120 × 162 × 25.7 | 99 × 135 × 39.2                   |
| Weight (g)                  | 308              | 355                               |


#### <PACKING LIST>

|              |  |
|--------------|--|
| Packing List | Control Panel / Power Supply Unit / Connecting cable, etc. |
|--------------|--|



# Central Remote Controller for 5-6 Rooms Multi, 8 Rooms Multi

UTY-DMMYM




Max. Controllable  
**1** multi system

Max. Controllable  
**8** indoor units

- Batched control of up to 8 indoor units. The temperature, airflow volume, and remote control prohibition settings of all indoor units can be batched.
- Corresponds to 9 different languages (English, German, French, Spanish, Russian, Portuguese, Italian, Greek, and Turkish)
- Large backlight LED screen
- Large easy-to-see operation panel


## System configuration

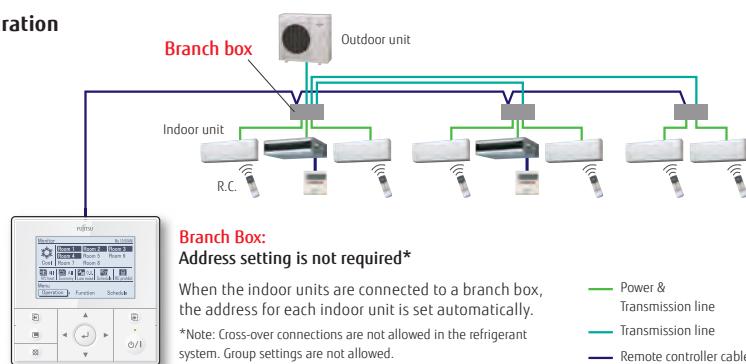

## Central Remote Controller Functions

### Weekly schedule timer

The ON/OFF setting can be set for 4 times a day. Two weekly patterns can be set to match the cooling and heating seasons.

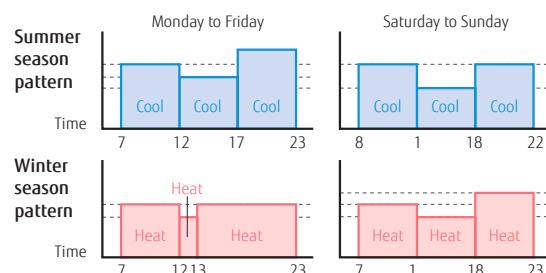

### Low noise operation

Users can choose from 4 low noise levels, depending on the installation environment. The operation time can be set using the timer.

### 10°C heat operation


When you leave, minimum heating operation is performed to maintain the room temperature (maintain at 10°C).

### Economy operation

Economy operation is energy saving, as the set temperature of indoor unit is shifted by 1°C and the maximum electric value of the outdoor unit is suppressed.

### Prohibited Settings


The remote controller operation of all indoor units comes with a lock function to prevent unapproved operations in the various rooms. The central remote controller also has a key lock function to prevent children from playing with it, etc

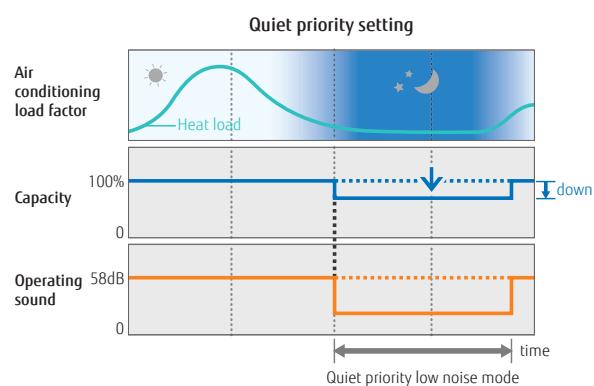

## Specifications

|                             |                  |
|-----------------------------|------------------|
| Model name                  | UTY-DMMYM        |
| Power Source                | DC 12 V          |
| Dimensions (H × W × D) (mm) | 120 × 120 × 21.3 |
| Weight (g)                  | 220              |

DC 12 V is supplied by the indoor unit.



## PRODUCT LINEUP: CONTROL SYSTEM-CENTRALIZED CONTROL

# Touch Panel Controller

UTY-DTGYZ1



Max. Controllable  
**400 indoor units**


Max. Controllable  
**100 outdoor units**

Max. Controllable  
**400 groups**

- Large-sized 7.5-inch TFT color
- LCD Easy finger touch operation
- Stylish shape and design to suit all application
- Up to 400 indoor units can be controlled
- Selectable 2 display types (Icon / List) in monitoring mode
- Supports 7 different-languages ,English, Chinese, French, German, Spanish, Russian, Polish.
- Mounted with LAN interface for remote control & operation, external input / output with emergency stop and batch ON / OFF

### Easy Operation

- Wide range of simple-to-understand icons
- Operation can be selected using your finger or the dedicated touch pen by pressing the appropriate on-screen icon.
- Back color identifies current control operation blue for monitoring, green for operational control.

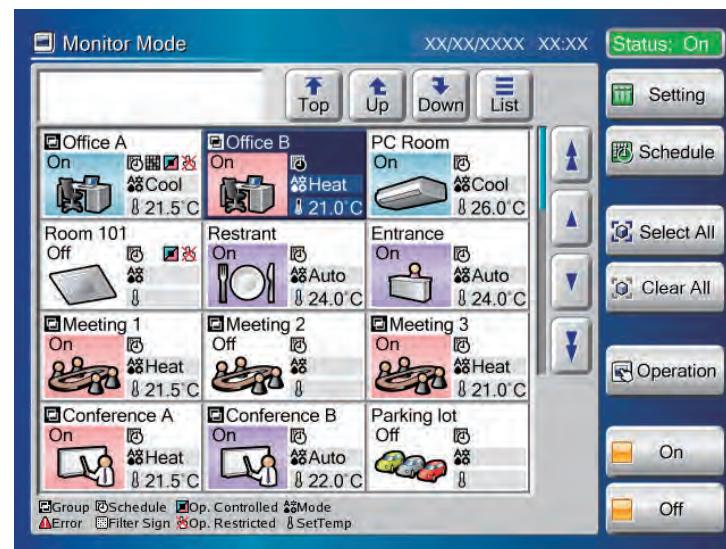

### Easy maintenance

- Flat touch screen is easily cleaned
- Non-glare coating on touch panel controller minimizes fingerprint marking
- Easy-to-remove front cover




### Easy installation

- Touch Panel Controller is easily mounted to the wall.
- Flat back surface allows to be installed wherever it is needed.
- No additional component is required for installation




### Up to 400 indoor units can be controlled

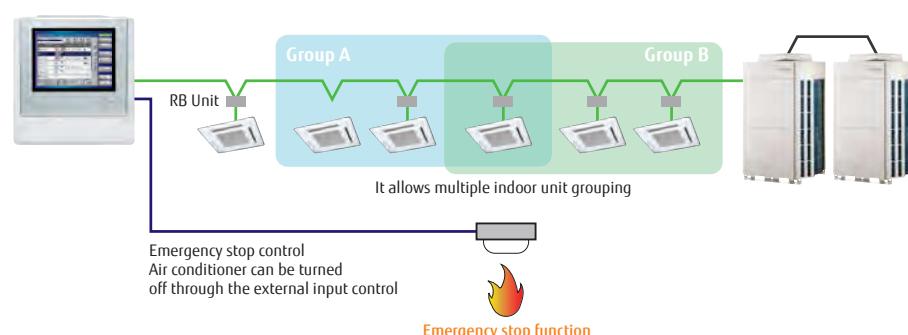

## Features: Touch Panel Controller

### Control & monitoring

- Control and monitor Fujitsu's air conditioner via LAN or Internet.
- Allow user or tenant to manage only assigned equipment by their PC or tablet from anywhere.
- Error contents are notified automatically by E-mail at error occurrence to handle the trouble promptly.

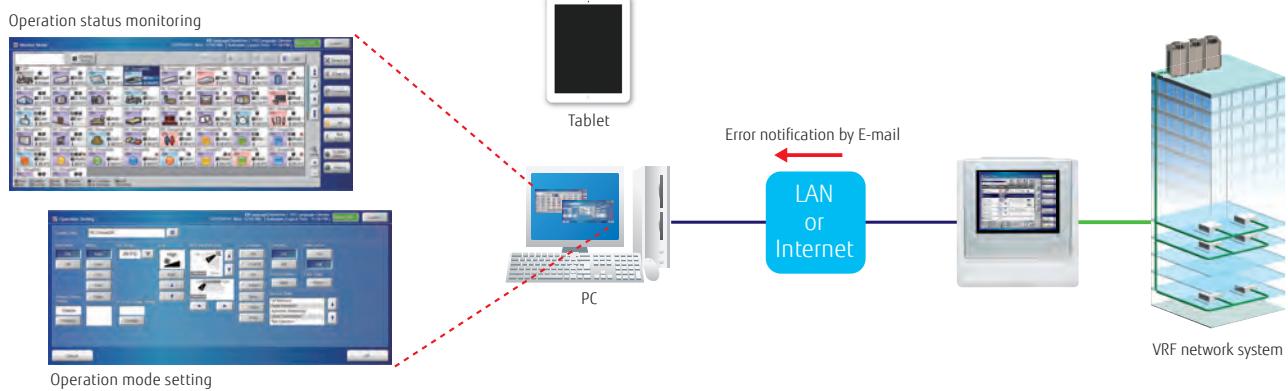

#### Smart Phone


| Model name               | Browser           |
|--------------------------|-------------------|
| Nexus 6P (Android 7.1.1) | Google Chrome 5.5 |
| iphone7 (iOS 10.1)       | Safari 10         |

#### Tablet

| Model name                    | Browser   |
|-------------------------------|-----------|
| iPad Pro 9.7inch (iOS 10.2.1) | Safari 10 |

### Flexible access permission for Point each level user.

Administrator can register multiple user to permit which indoor unit(s) and which function can access.

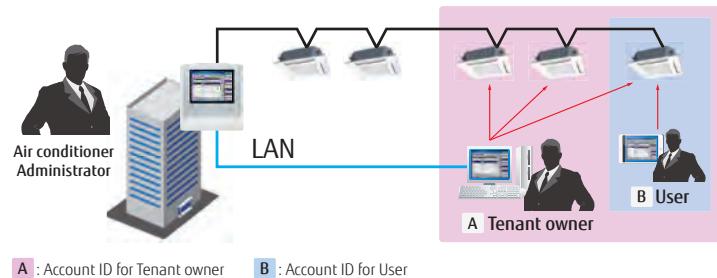


### Additional languages function

Corresponds to 7 different languages, English, Chinese, French, German, Spanish, Russian, Polish as standard.

Additional language can be integrated on remote device by creating language database.

Additional language is displayed on only the remote device, and Touch Panel Controller cannot be added other languages.

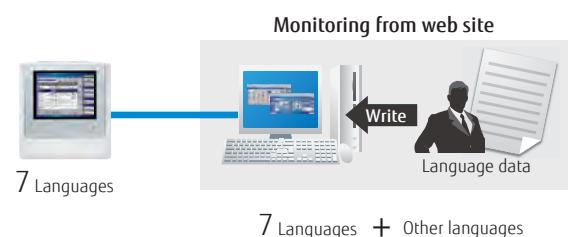


### Electricity charge apportionment


(Option: UTY-PTGXA)

- Electricity charge apportionment can be performed easily for the power consumed when billing users for air conditioning power charges.

- Apportionment charge/bill calculation
- Tenant (block) setting
- Common facilities apportionment setting
- Rated power consumption allotment setting
- Individual calculation at cooling and heating
- Electricity meter supported

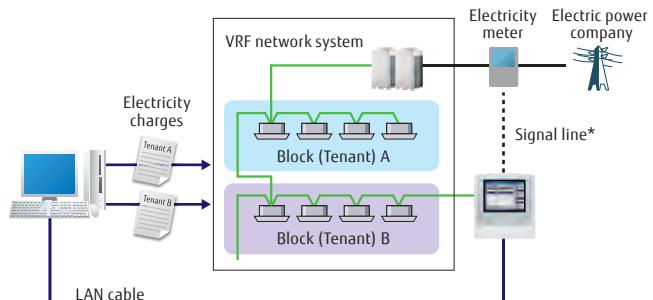

\*: Electricity meter (1unit) can be connected to external input connector of the TPC unit. In this case, electricity meter cannot be connected to outdoor unit simultaneously.



## PRODUCT LINEUP: CONTROL SYSTEM-CENTRALIZED CONTROL

### Features: Touch Panel Controller

#### Automatic summer time setting


##### Providing function

###### 1) Schedule setting of summer time setting

- It prevents the user from forgetting to set summer time. In addition, it reduces the time and labor of user.

##### Automatic clock adjustment



###### 2) The time setting of each controller can be set in batch automatically.

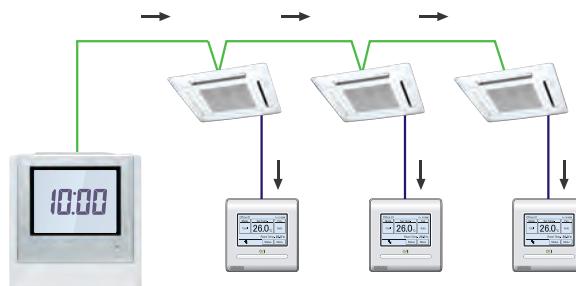

#### Outdoor low noise operation

Users can choose from 4 low noise levels, depending on the installation environment.

The operation time can be set using the timer.

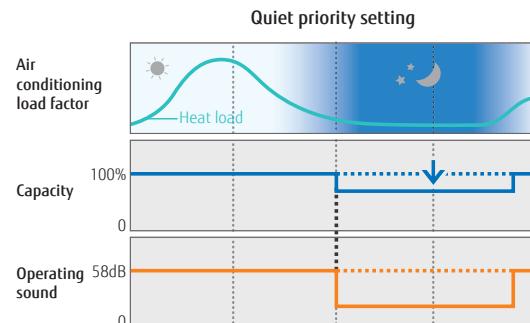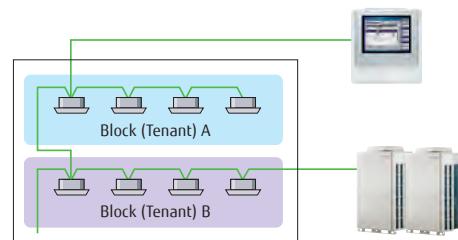

#### **NEW** Various energy saving control


##### Custom Auto

- Maintains 2 separate set points for heating and cooling.
- Automatically changes mode between heating and cooling.

\* This function is not available for some models.



Cooling set temp. 28°C, Heating set temp. 18°C

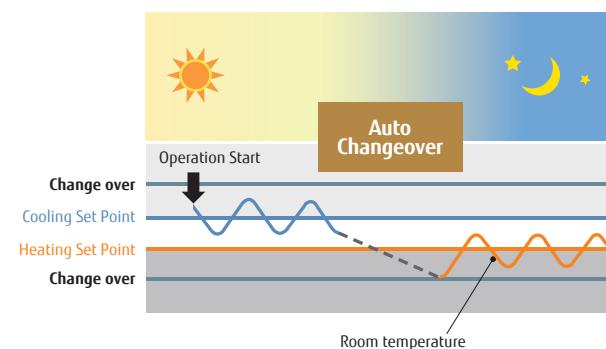

#### **NEW** Refrigerant leakage detection function

The refrigerant leak condition is indicated by the management equipment, and if refrigerant leakage occurs, it is displayed as a pop-up, the user is notified, and the refrigerant is shut off.



**FUNCTIONS SUMMARY**

|  | UTY-DTGYZ1      | Monitoring side |
|--|-----------------|-----------------|
| <b>Air conditioning control function</b> |                 |                 |
| On / Off                                 | ●               | ●               |
| Operation mode setting*                  | ●               | ●               |
| Fan speed setting                        | ●               | ●               |
| Room temp. setting                       | ●               | ●               |
| Room temp. set point limitation          | ●               | ●               |
| Test operation                           | ●               | ●               |
| Up/down air direction flap setting       | ●               | ●               |
| Right/left air direction flap setting    | ●               | ●               |
| Individual louver control                | ●* <sup>1</sup> | ●               |
| Group setting                            | ●               | ●               |
| RC prohibition                           | ●               | ●               |
| Anti freeze setting                      | ●               | ●               |
| Set temp. auto return                    | —               | ●               |
| Various energy saving control            | —               | ●               |
| Economy mode setting                     | ●               | ●               |
| Human sensor control                     | —               | ●               |
| <b>Display</b>                           |                 |                 |
| Error                                    | ●               | ●               |
| Defrosting                               | ●               | ●               |
| Current time                             | ●               | ●               |
| Day of week                              | ●               | ●               |
| R.C. prohibition                         | ●               | ●               |
| Cooling/heating priority                 | ●               | ●               |
| Address display                          | ●               | ●               |
| Room temp                                | ●               | ●               |
| Multi language                           | ●               | ●               |
| Summer time                              | ●               | ●               |
| Time zone setting                        | ●               | ●               |
| Name registration                        | ●               | ●               |
| Backlight                                | ●               | ●               |
| Language setting                         | 7               | 7+other         |
| Filter sign reset                        | ●               | ●               |
| Memory operation                         | ●               | ●               |
| Refrigerant leakage detection function   | ●               | ●               |

●: Supported ○: Optional function —: Not supported yet


\*1 Only setting cancellation can be operated.

\*2 This function is available only through external input control.

|                                      | UTY-DTGYZ1                                     | Monitoring side  |
|--------------------------------------|--|------------------|
| <b>Timer</b>                         |  |                  |
| Schedule timer                       | Period<br>On/off, Temp,<br>Mode, Times per day | Year<br>20<br>20 |
| On/off timer                         | —  | —                |
| Sleep timer                          | —  | —                |
| Program timer                        | —  | —                |
| Auto off timer                       | —  | ●                |
| Day off                              | ●  | ●                |
| Min. unit of timer setting (Minutes) | 10   | 10               |
| <b>Control</b>                       |  |                  |
| Status monitoring system             | ●  | ●                |
| Electricity charge apportionment     | ○  | ○                |
| Error history                        | ●  | ●                |
| Emergency stop                       | ●* <sup>2</sup>                                | ●* <sup>2</sup>  |
| Remote management                    | —  | ●                |
| Energy saving management             | —  | —                |
| E-mail notification for malfunction  | —  | ●                |
| Key lock                             | ●<br>Password<br>setting                       | —                |
| Low noise mode                       | ●  | ●                |

**Specifications**

| Model name                  | UTY-DTGYZ1                                   |
|-----------------------------|--|
| Power Supply                | 100-240 V 50/60 Hz, Single phase             |
| Dimensions (H × W × D) (mm) | 260 × 246 × 54                               |
| Weight (g)                  | 2,150  |
| Interface                   | Transmission/LAN/USB/EXT IN/EXT OUT/Reset SW |



## PRODUCT LINEUP: CONTROL SYSTEM-CENTRALIZED CONTROL

### System Controller

UTY-APGXZ1 Software



Max. Controllable

**4 VRF network systems**

Max. Controllable

**400 outdoor units**

Max. Controllable

**1,600 indoor units**

System Controller realizes the advanced integrated monitoring & control of VRF network system from small scale buildings to large scale buildings.

- Up to a maximum of 4 VRF network systems, 1600 indoor units, and 400 outdoor units can be controlled.
- In addition to air conditioning precision control function, central remote control, electricity charge calculation, schedule management, and energy saving functions are strengthened and building manager and owner needs are met.
- Corresponds to 7 different languages (English, Chinese, French, German, Spanish, Russian, Polish)

### System Controller Lite

UTY-ALGXZ1 Software



Max. Controllable

**1 VRF network systems**

Max. Controllable

**100 outdoor units**

Max. Controllable

**400 indoor units**


System Controller Lite has standard functions sufficient for air conditioner management in small and medium scale buildings .


- Up to a maximum of 1 VRF network system, 400 indoor units, and 100 outdoor units can be controlled.
- In addition to air conditioning precision control function, a variety of management software is available as an option to give customers a wide range of choice.
- Corresponds to 7 different languages (English, Chinese, French, German, Spanish, Russian, Polish)

### High visibility and Easy operation

**Click & Operate:** The property is shown visually from the perspective most suitable for operation and operated accordingly (Click & Operate). You can select from among the 4 displays of site, building, floor, or list.

**Freely define groups for batched control:** Indoor units can be freely grouped for simple batched control from a tree menu. Grouping by hierarchical structure, such as by section, division or department is possible.

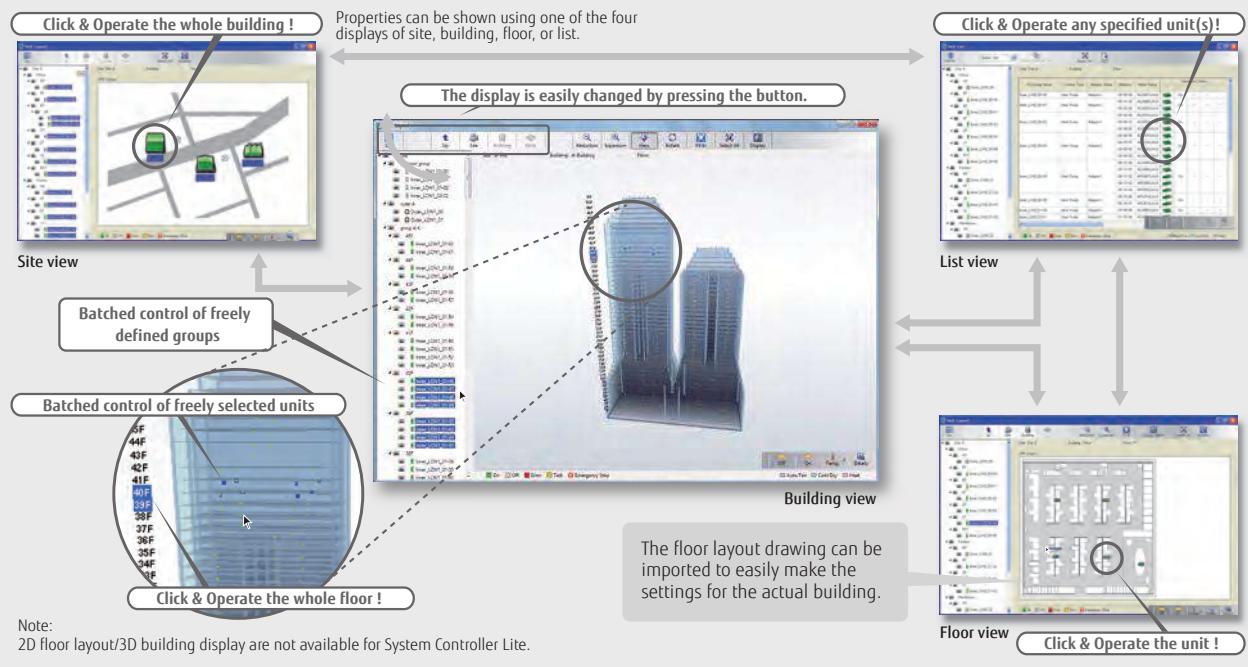




## Features: System Controller/System Controller Light

### 3rd party devices connected by Modbus can be controlled.

**Standard** for System Controller    **Option** for System Controller Lite UTY-PLGXX2

When Modbus Adaptor (locally purchased) is connected to PC, the electric facilities supported by Modbus can be controlled centrally. Wasteful electricity charge by forgetting to turn off and patrol activities can be reduced in the entire building.

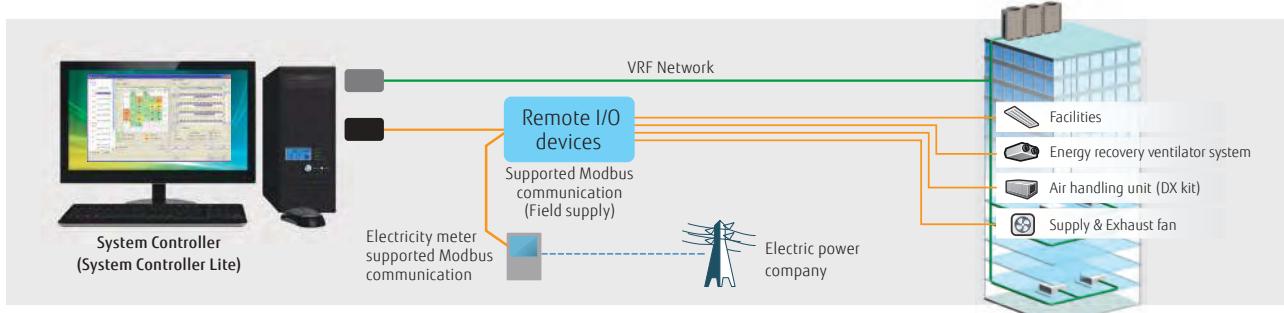


### Diverse operation management & Data management

**Standard** for System Controller and System Controller Lite

#### Schedule management

- Annual schedules can be set for each remote controller group / user defined group.
- Start / stop, operating mode, remote controller prohibition, and temperature settings can be set up to 143 times per day at 10 minute intervals for up to 101 configurations for each remote controller group.
- Settings can be made for periods straddling midnight.
- Allows programming of special settings for holidays, including public holidays, for a complete year.
- Low noise operation of outdoor unit can be scheduled.

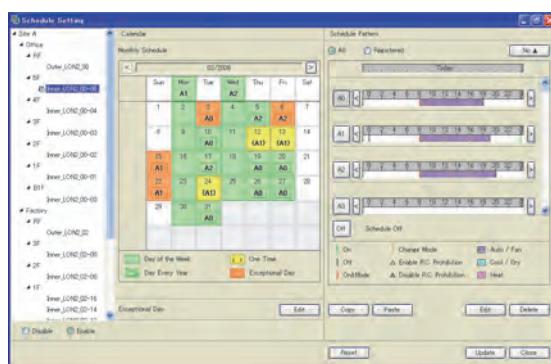

#### Diverse control of indoor unit and outdoor unit

- Indoor unit operation state, operation mode, etc. are displayed
- Indoor unit start / stop and operation mode switching
- Room temperature set point limitation
- Outdoor unit low noise setting

#### Remote controller prohibition

This prohibits changes to the operation mode, temperature, start/stop, etc.

#### Error display & E-mail notification

Error is notified with popup message, audible sound and E-mail real time when error occurs. Errors for the past 1 year are logged and can be reviewed later.

#### Operating & control record

Displays the history of operation status and control.

#### Data base import/export

Imports/exports registration data, layout data, and image data. Only the administrator can make this setting.

#### Automatic clock adjustment

The time setting of each controller can be set in batch automatically.

### Electricity charge apportionment

**Standard** for System Controller


**Option** for System Controller Lite UTY-PLGXA2


#### Electricity charge apportionment calculation framework

Suppose you want to find the power consumed by the air conditioners of each tenant from the electricity charge for each month. With electricity charge apportionment function, used energy apportionment ratio will be provided, calculating in detail the energy consumed by the units used by each tenant. This information is then used to calculate the charges for the electricity consumed for air conditioning by each tenant from the total electricity charges in the bill from the electric power company. (See figure at right)

The detailed calculation takes into consideration such things as unused rooms and nighttime electricity charges and shows them in a charges calculation sheet.

#### System Configuration Example

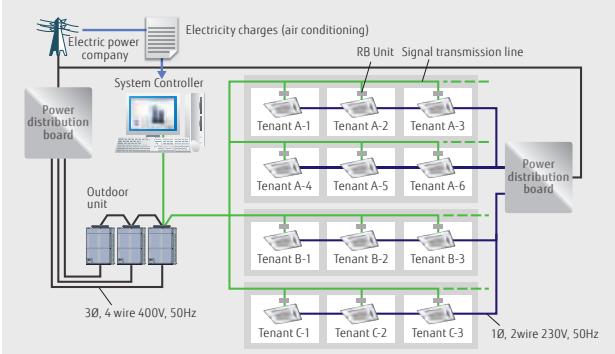



## PRODUCT LINEUP: CONTROL SYSTEM-CENTRALIZED CONTROL


**Features:** System Controller/System Controller Light

### Remote management


- Standard** for System Controller
- Option** for System Controller Lite UTY-PLGXR2

System Controller may be used on site or remotely over various networks for remote central control. System Controller requires 2 software working together. VRF Controller runs on site and communicate with VRF system. VRF Explorer runs remotely and provides user interface and communicate with the VRF Controller. VRF Controller and VRF Explorer program may run in a single PC or in different PCs separated by network. By using VRF Explorer software, one PC can perform central control of 10 VRF system sites with max. 20 buildings per site.

#### On site central control

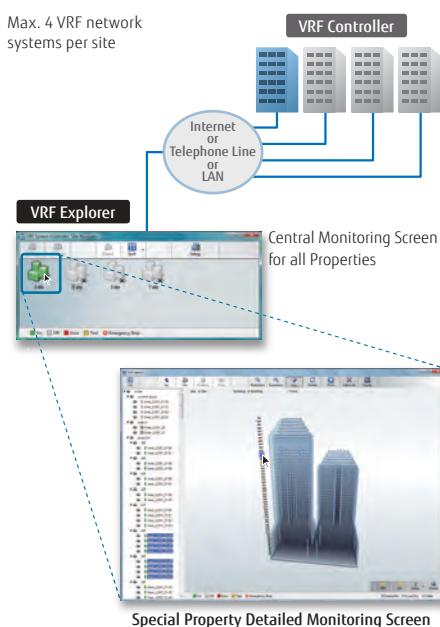


#### Remote central control

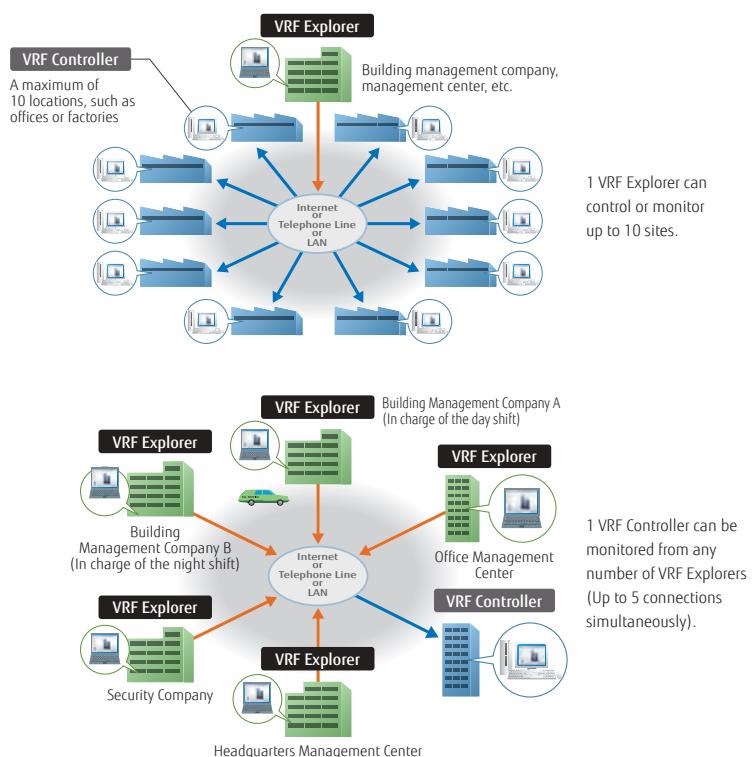

### Energy saving management

- Option** for System Controller UTY-PEGX
- Option** for System Controller Lite UTY-PLGXE2

A variety of energy saving operations can be set and managed depending on the season, weather, and time period. Excellent energy saving operation is performed while keeping users comfortable.

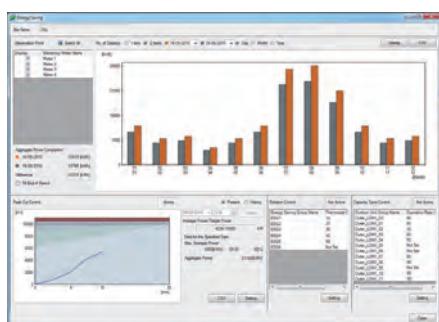

Energy saving graph data: This graph compares the electricity consumption with the previous month and previous year to make it easy to analyze the energy saving effect.

#### Indoor unit rotation operation

The operation of indoor units can be automatically rotated within a group in accordance with the set annual schedule to reduce power consumption while maintaining comfort. The indoor unit operation stoppage rate can be selected.

#### Peak cut operation

A power meter is connected to detect the total power consumption while shifting the indoor unit set temperature, set the indoor unit forced thermostat off, and taking other measures to carefully control the power consumed while maintaining comfort and conducting control to maintain the target power consumption set for each time. The indoor units to be controlled can be freely grouped and the control level can be set.

#### Outdoor unit capacity save

Outdoor unit capacity save switches the outdoor unit capability upper limit to suppress power consumption during hot summers and cold winters by averaging the power saving effect of each refrigerant system. You can select from 50% or more of the capacity upper limit.

## FUNCTIONS SUMMARY

| Function                               | Type   | System controller                         |                   | System controller lite |                   |                   |                   |                   |
|--|--|---|-------------------|------------------------|-------------------|-------------------|-------------------|-------------------|
|  |  | UTY-APGXZ1                                | Option UTY-PEGXZ1 | UTY-ALGXZ1             | Option UTY-PLGXR2 | Option UTY-PLGXA2 | Option UTY-PLGXE2 | Option UTY-PLGXX2 |
| System specification                   | Max. VRF networks supported  | 4   | —                 | 1                      | —                 | —                 | —                 | —                 |
|  | Max. indoor unit / remote controller groups per VRF network        | 400                                       | —                 | 400                    | —                 | —                 | —                 | —                 |
|  | Max. outdoor units per VRF network                                 | 100                                       | —                 | 100                    | —                 | —                 | —                 | —                 |
|  | Max. indoor units / remote controller groups per System controller | 1600                                      | —                 | 400                    | —                 | —                 | —                 | —                 |
|  | Max. outdoor units per System controller                           | 400                                       | —                 | 100                    | —                 | —                 | —                 | —                 |
| Site supervision                       | Multi site display   | 10  | —                 | 10                     | —                 | —                 | —                 | —                 |
|  | Number of building / 1 site  | 20  | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Number of floor per 1 site   | 200                                       | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Number of floor per 1 building                                     | 50  | —                 | —                      | —                 | —                 | —                 | —                 |
|  | 3D graphical layout view   | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | 2D graphical layout view   | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | List display   | ●   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Tree display   | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
| Error management                       | Error notification   | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Audible alarm  | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Error e-mail notification  | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
| History                                | Error history  | ●   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Operation history  | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
| Operation control                      | Control history  | ●   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | On/Off   | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Operation mode*  | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Room temperature   | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Fan speed  | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Air flow direction   | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Economy mode   | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Room temperature set point limitation                              | ●   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Test operation   | ●   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Antifreeze   | ●   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Outdoor unit low noise setting                                     | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Individual control   | Remote control prohibition setting        | ●                 | —                      | —                 | —                 | —                 | —                 |
|  | Individual management  | Temperature upper and lower limit setting | ●                 | —                      | ●                 | —                 | —                 | —                 |
|  | Other  | Filter sign reset                         | ●                 | —                      | ●                 | —                 | —                 | —                 |
|  | Memory operation   | ●   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Pattern operation  | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
| Schedule                               | Annual Schedule  | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | Special day setting  | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
|  | On/off per day   | 72  | —                 | 72                     | —                 | —                 | —                 | —                 |
|  | On/off per week  | 504                                       | —                 | 504                    | —                 | —                 | —                 | —                 |
|  | Day off  | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
| Remote management                      | Min. unit of timer setting (Minutes)                               | 10  | —                 | 10                     | —                 | —                 | —                 | —                 |
|  | Low noise mode Weekly schedule                                     | ●   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Web Operation  | ●   | —                 | —                      | —                 | —                 | —                 | —                 |
| Electricity charge apportionment       | Remote monitoring  | ●   | —                 | —                      | ●                 | —                 | —                 | —                 |
|  | Remote operation control   | ●   | —                 | —                      | ●                 | —                 | —                 | —                 |
|  | Remote function setting  | ●   | —                 | —                      | ●                 | —                 | —                 | —                 |
|  | Apportionment charge/bill calculation                              | ●   | —                 | —                      | —                 | ●                 | —                 | —                 |
|  | Tenant (block) setting   | ●   | —                 | —                      | —                 | ●                 | —                 | —                 |
| Energy saving management               | Common facilities apportionment setting                            | ●   | —                 | —                      | —                 | ●                 | —                 | —                 |
|  | Rated power consumption allotment setting                          | ●   | —                 | —                      | —                 | ●                 | —                 | —                 |
|  | Individual calculation at cooling and heating                      | —   | —                 | ●                      | —                 | ●                 | —                 | —                 |
|  | Electricity meter supported  | —   | —                 | ●                      | —                 | ●                 | —                 | —                 |
|  | Indoor unit rotation   | —   | —                 | ●                      | —                 | —                 | —                 | —                 |
| External Device Control                | Peak cut control   | —   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Outdoor unit capacity save   | —   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Record of energy saving operation                                  | —   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Energy saving information  | —   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Power consumption monitor  | —   | —                 | ●                      | —                 | —                 | —                 | —                 |
| Others                                 | Electricity meter supported  | —   | —                 | ●                      | —                 | —                 | ●                 | —                 |
|  | Monitor  | ●   | —                 | —                      | —                 | —                 | —                 | ●                 |
|  | Control  | ●   | —                 | —                      | —                 | —                 | —                 | ●                 |
| Others                                 | Database import/export   | ●   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Automatic clock adjustment   | ●   | —                 | ●                      | —                 | —                 | —                 | —                 |
|  | Multi language   | 7 languages                               | —                 | 7 languages            | —                 | —                 | —                 | —                 |
| Refrigerant leakage detection function |  | ●   | —                 | ●                      | —                 | —                 | —                 | —                 |

●: Available. - : Not available.

## Personal computer system requirements

The required PC specifications are shown in the following table.

|                     | System Controller   | System Controller Lite   |
|---------------------|---|--|
| Operating system    | • Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1<br>• Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit)<br>• Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit)<br>[Supported languages] English, Chinese, French, German, Russian, Spanish, and Polish  |  |
| CPU                 | Intel® CoreTM i3 2 GHz or higher  |  |
| Memory              | • 2 GB or more (for Windows® 7 [32-bit])<br>• 4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10)   |  |
| HDD                 | 40 GB or more of free space   |  |
| Display             | 1024 x 768 or higher resolution   |  |
| Interface           | • Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using Public Telephone Line)<br>• USB ports (Maximum of 6 ports)<br>(Required only for the Server PC that works as VRF Controller)<br>- Maximum of 2 USB ports are required for WHITE-USB-KEY/WibuKey connection<br>- Maximum of 4 USB ports are required for Echelon® U10 USB Network Interface<br>* Maximum number of required USB port depends on the applicable system configuration. | • Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using Public Telephone Line)<br>• USB ports (Maximum of 6 ports)<br>(Required only for the Server PC that works as VRF Controller)<br>- Maximum of 4 USB ports are required for WHITE-USB-KEY/WibuKey connection<br>- 1 USB port is required for Echelon® U10 USB Network Interface<br>* The maximum number of required USB port depends on the applicable system configuration. |
| Graphic accelerator | Microsoft® DirectX® 9.0c compatible   |  |
| Software            | Adobe® Reader® 9.0 or later   |  |


\* Echelon® U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R) (Required for each VRF Network.)

## PACKING LIST

| Type          | For System controller |                | For System controller Lite |               |                                  |               |
|---------------|-----------------------|----------------|----------------------------|---------------|----------------------------------|---------------|
|               | System Controller     | Energy manager | System Controller Lite     | Option        |                                  |               |
|               |                       |                |                            | Remote access | Electricity charge apportionment | Energy saving |
| Model name    | UTY-APGXZ1            | UTY-PEGXZ1     | UTY-ALGXZ1                 | UTY-PLGXR2    | UTY-PLGXA2                       | UTY-PLGXE2    |
| WHITE-USB-KEY | 1                     | 1              | 1                          | 1             | 1                                | 1             |

\*1: Software protection key to be inserted in a USB slot running System Controller or System Controller Lite.

System Controller or System Controller Lite may only run on a PC with WHITE-USB-KEY. However, WHITE-USB-KEY is not required for remote VRF Explorer software.



## PRODUCT LINEUP: CONTROL SYSTEM-CONVERTOR/ADAPTOR

### BACnet® Gateway

UTY-ABGXZ1



WHITE-USB-KEY  
(Software Protection Key)




BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (B). BTL is a registered trademark of BACnet International.

Max. Controllable  
**4**  
VRF network systems  
Max. Controllable  
**400** outdoor units  
Max. Controllable  
**1,600** indoor units

- It is possible to connect medium to large sized BMS to VRF network system via BACnet®, a global standard for open networks.
- A maximum of 1600 indoor units with 4 VRF network systems (a maximum of 400 indoor units & 100 outdoor units for one network system) can be connected to one BACnet® Gateway.
- It is possible to control or monitor VRF network system from BMS via BACnet® Gateway.
- Compatible with BACnet® (ANSI / ASHRAE-135-2014) application specific controller (B-ASC).
- Compatible with BACnet®/IP over Ethernet.
- Scheduling function, Alarm & Event functions as well as Electricity Change Apportionment function are provided in BACnet® Gateway.
- Connection between VRF network system to personal computer is possible via small U10 USB interface. However, both U10 USB interface & personal computer are field supplied items.
- Corresponds to 7 different languages, English, Chinese, French, German, Spanish, Russian, Polish.

#### Installation example

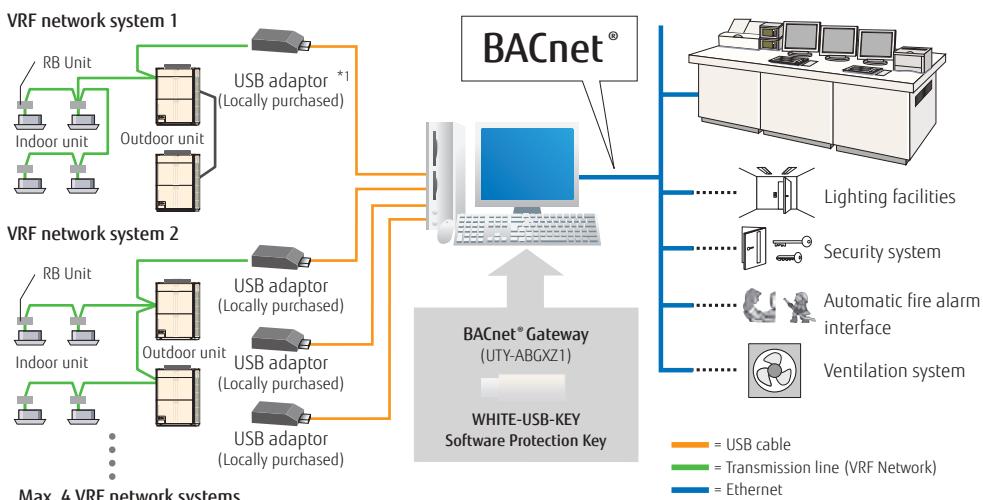


#### Personal computer system requirements

| UTY-ABGXZ1              |  |
|-------------------------|--|
| <b>Operating system</b> | <ul style="list-style-type: none"> <li>Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1</li> <li>Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit)</li> <li>Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit)</li> </ul> <p>[Supported languages]<br/>English, Chinese, French, German, Russian, Spanish, and Polish</p>             |
| <b>CPU</b>              | Intel® Core™ i3 2 GHz or higher  |
| <b>Memory</b>           | <ul style="list-style-type: none"> <li>2 GB or more (for Windows® 7 [32-bit])</li> <li>4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10)</li> </ul>  |
| <b>HDD</b>              | 40 GB or more of free space  |
| <b>Display</b>          | 1024 x 768 or higher resolution  |
| <b>Interface</b>        | <ul style="list-style-type: none"> <li>Ethernet port (for getting access to the Internet using LAN)</li> <li>USB ports (Maximum of 5 ports) <ul style="list-style-type: none"> <li>- 1 USB port is required for WHITE-USB-KEY/WibuKey connection</li> <li>- Maximum of 4 USB ports are required for Echelon® U10 USB Network Interface</li> </ul> </li> </ul> <p>* Maximum number of required USB ports depends on the applicable system configurations.</p> |
| <b>Software</b>         | Adobe® Reader® 9.0 or later  |

\*Echelon® U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R) (Required for each VRF Network.)

#### <Packing list>

| Name and shape | Quantity | Application   |
|----------------|----------|---|
| WHITE-USB-KEY  | 1        | Includes the software and manuals, license for BACnet® Gateway. |



# BACnet® Gateway

UTY-VBGX



BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse products or services. BACnet International is a registered standard. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (B). BTL is a registered trademark of BACnet International.


Max. Controllable  
**1** VRF network system

Max. Controllable  
**32** refrigerant system

Max. Controllable  
**128** indoor units

- BACnet® Gateway enables to connect a BMS and FG VRF system.
- A maximum of 128 indoor units and 32 refrigerant system can be connected to a single BACnet® Gateway.
- Compatible with BACnet® (ANSI / ASHRAE-135-2012) application specific controller (B-ASC).
- Compatible with BACnet®/IP over Ethernet.

## Installation example

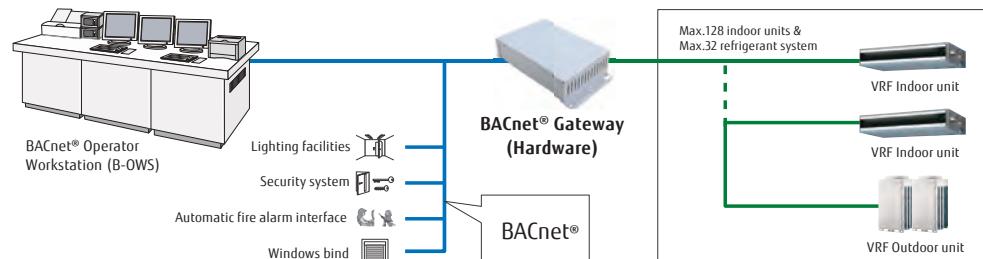

## Specifications

| Model name                                    | UTY-VBGX |
|---|----------|
| Number of controllable indoor units           | 128      |
| Number of controllable refrigerant system     | 32       |
| Number of controllable VRF network            | 1        |
| Number of connectable units / one VRF network | 4        |

| Model name                  | UTY-VBGX                         |
|-----------------------------|----------------------------------|
| Power Supply                | 100-240 V 50/60 Hz, single phase |
| Power Consumption (W)       | 4.6 (max.)                       |
| Dimensions (H × W × D) (mm) | 59.6 × 270.4 × 176               |
| Weight (g)                  | 1,200                            |

# Network Convertor for LonWORKS®

UTY-VLGX




Max. Controllable  
**4** units to BMS

Max. Controllable  
**100** outdoor units

Max. Controllable  
**128** indoor units

- For connection between VRF network system and a **LonWORKS®** open network for management of small to medium-sized BMS and VRF network system.
- The UTY-VLGX permits central monitoring and control of a VRF network system from a BMS through a **LonWORKS®** interface.
- Up to 128 Indoor units can be connected to one Network Convertor for **LonWORKS®**.

## Installation example

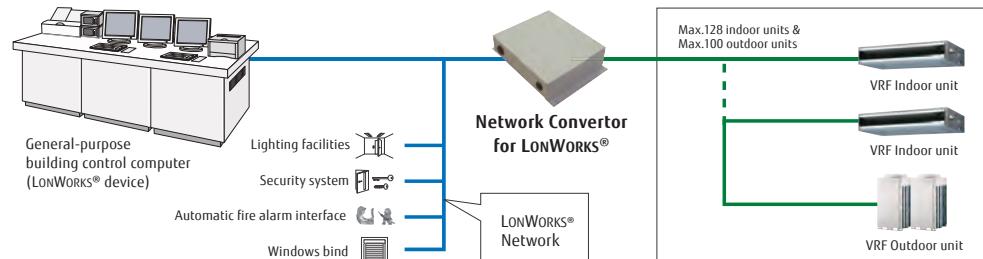


## Specifications

| Model name                  | UTY-VLGX                         |
|-----------------------------|----------------------------------|
| Power Supply                | 208-240 V 50/60 Hz, Single phase |
| Power Consumption (W)       | 4.5                              |
| Dimensions (H × W × D) (mm) | 67 × 288 × 211                   |
| Weight (g)                  | 1,500                            |

## Transmission specifications (BMS side)

|                       |   |
|-----------------------|---|
| Transmission speed    | 78 kbps   |
| Transceiver           | FT-X1 (Echelon® Corporation)                        |
| Transmission way form | Free topology                                       |
| Terminal resistor     | None<br>(It attaches at the terminal of a network.) |



## PRODUCT LINEUP: CONTROL SYSTEM-CONVERTOR/ADAPTOR

### MODBUS® Convertor for Indoor Unit

UTY-VMSX




Max. Connectable

**1** Single indoor unit

**The MODBUS Convertor allows a complete integration of air conditioners into MODBUS Networks.**

- Simple installation due to small and compact size.
- No separate external power supply required.
- The MODBUS Convertor must be connected one by one in the indoor unit.
- The MODBUS Controller permits central monitoring and control of air conditioners from BMS/Central/Home Controller.

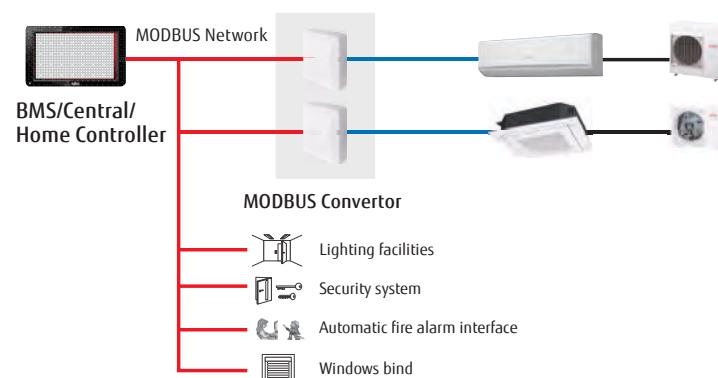


#### Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed setting
- Louver position (Airflow direction setting)
- Room temperature setting and display
- Economy mode setting
- Error status

#### Easy Installation

Flexible installation locations with neat wirings are feasible since no power supply cable is used in the convertor.

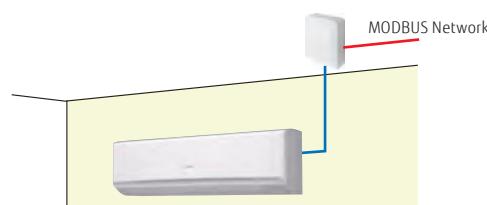


#### Specifications

| Model name  | UTY-VMSX       |
|---|----------------|
| Power supply  | DC 12 V        |
| Input Power (W)   | Max. 1.2       |
| Dimensions (H×W×D)(mm)  | 140 × 117 × 43 |
| Weight (g)  | 200            |
| Maximum Connectable indoor unit number per 1 MODBUS Convertor | 1              |

#### Modbus communication specifications

|                      |                 |
|----------------------|-----------------|
| Transfer mode        | RTU mode        |
| Communication speed  | 9600/19200bps   |
| Data bit             | 8               |
| Parity               | even/odd/none   |
| Stop bit             | 1/2 (no parity) |
| Network              | RS485           |
| Maximum cable length | 1000m (3280 ft) |



# MODBUS® Convertor

UTY-VMGX




Max. Controllable  
**9** units to one VRF

Max. Controllable  
**100** outdoor units

Selectable  
**128** indoor units

**The MODBUS Convertor allows a complete integration of air conditioners into MODBUS Networks.**

- Compact and lightweight design
- Direct connection to MODBUS Network
- Up to 128 indoor units can be controlled in one MODBUS Convertor
- The MODBUS Convertor permits central monitoring and control of air conditioners from BMS or Central Controller.
- Up to 9 convertors can be connected to a VRF network. The simultaneous controls such as ON/OFF or temperature settings can be done for each zone.
- It is easy to locate the source of error if any connection errors should occur after completion of installation works.

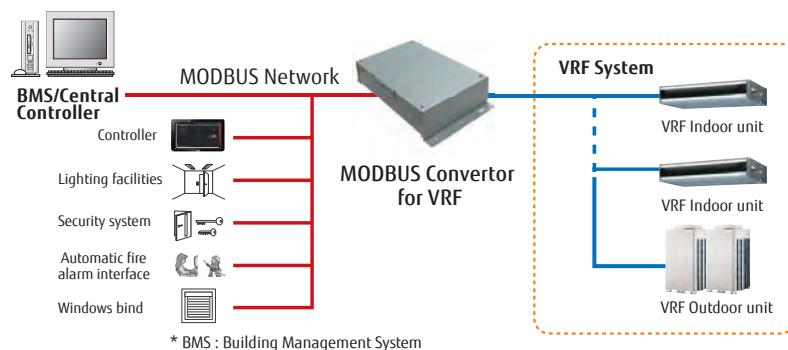

# MODBUS® Interface


FJ-RC-MBS-1



Max. Connectable  
**1** Single indoor unit

**The MODBUS Interface allows a complete integration of air conditioners into MODBUS Networks.**

- Simple installation due to small and compact size.
- No separate external power supply required.
- The MODBUS Interface permits central monitoring and control of air conditioners from BMS.

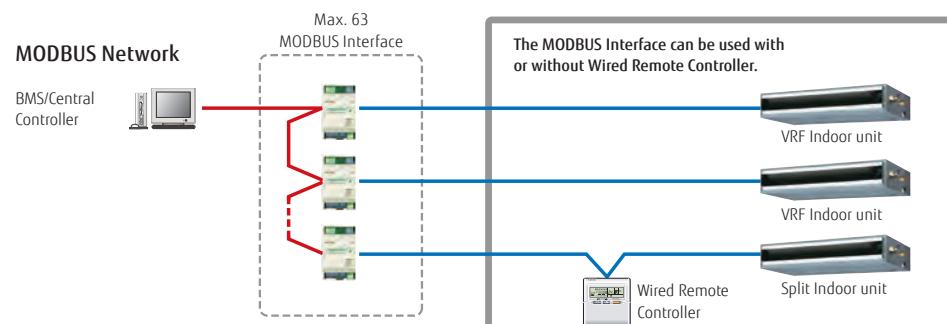

## Specifications

| Model name                  | UTY-VMGX           |
|-----------------------------|--------------------|
| Power Supply                | 220-240 V 50/60 Hz |
| Input power (W)             | Max. 2             |
| Dimensions (H × W × D) (mm) | 54 × 260 × 150     |
| Weight (g)                  | 1,100              |

| Model name                  | FJ-RC-MBS-1  |
|-----------------------------|--------------|
| Dimensions (H × W × D) (mm) | 93 × 53 × 58 |
| Weight (g)                  | 85           |



## PRODUCT LINEUP: CONTROL SYSTEM-CONVERTOR/ADAPTOR

### KNX® Convertor for VRF


UTY-VKGX



Max. Controllable  
**100** outdoor units  
Selectable  
**128** indoor units

#### KNX Convertor is useful for centralized control in a system.

- New KNX Convertor enables to connect central/home controller and FG VRF system.
- A maximum of 128 indoor units and 100 outdoor units can be connected to single KNX Convertor.

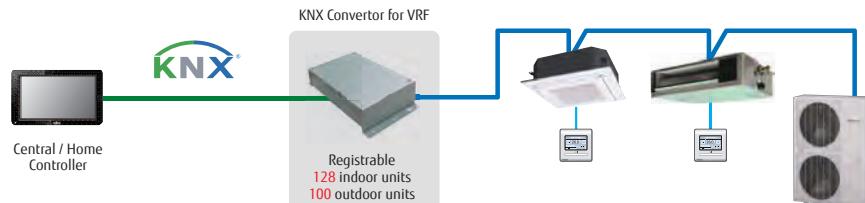

### KNX® Convertor for Indoor Unit

UTY-VKSX



Max. Connectable  
**1** Single indoor unit

#### KNX Convertor is useful for individual control of indoor.

- New KNX Convertor enables to connect central/home controller and FG indoor unit.
- Compact and light weight design



### KNX® Interface


FJ-RC-KNX-1i



Max. Controllable  
**1** group


#### The KNX Interface allows a complete integration of air conditioners with KNX Network systems.

- Simple installation due to small and compact size.
- No separate external power supply required (just KNX bus power).
- Can be used for single indoor units and group controlled (up to 16) indoor units.

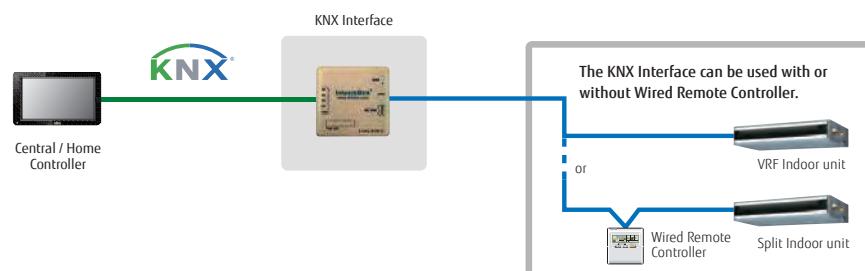

#### Specifications

| Model name                  | UTY-VKGX           | UTY-VKSX       | FJ-RC-KNX-1i |
|-----------------------------|--------------------|----------------|--------------|
| Power supply                | 220-240 V 50/60 Hz | (DC 12 V)      |              |
| Power consumption (W)       | 1.5                | 0.6            |              |
| Dimensions (H × W × D) (mm) | 54 × 260 × 150     | 140 × 117 × 43 | 70 × 70 × 28 |
| Weight (g)                  | 1,200              | 215            | 70           |



# Wireless LAN Interface


UTY-TFNXZ1 / UTY-TFSXZ1, UTY-TFSXW1



Max. Connectable


**1** Single indoor unit

- It is the most advanced solution to remotely manage an Air Conditioning system using all sort of mobile devices such as Smartphones, and tablets.
- No separate external power supply required
- Can be used for single indoor units and multi system indoor units

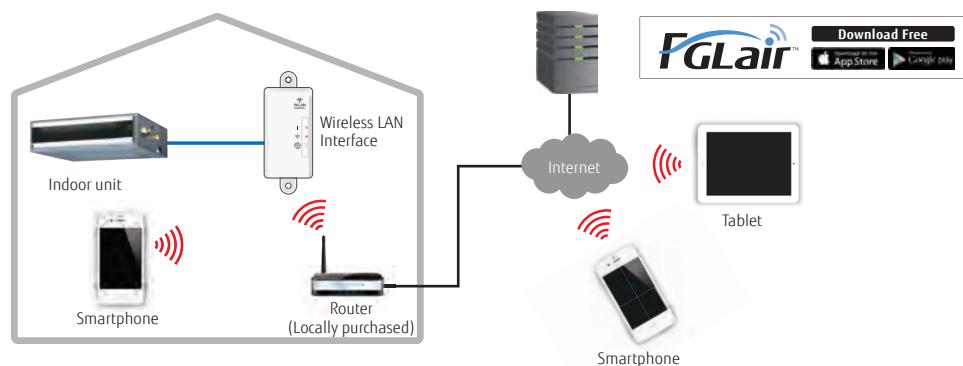


## Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed setting
- Louver position (Airflow direction setting)
- Timer operation setting (Weekly timer)
- Economy mode setting

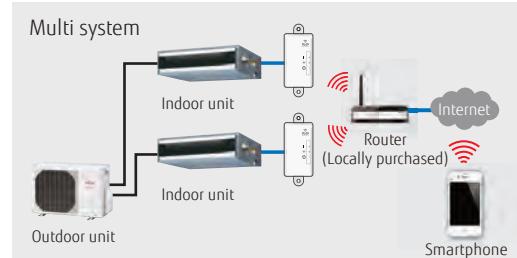


## Multiple air conditioning management

- Multiple air conditioning management at difference locations.

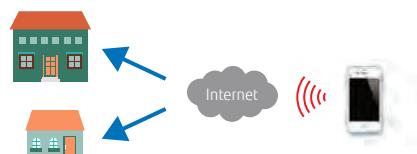


## Error display & E-mail notification

- Alerts e-mail notification
- Air conditioning malfunction display
- It enables rapid service response when error occurs.

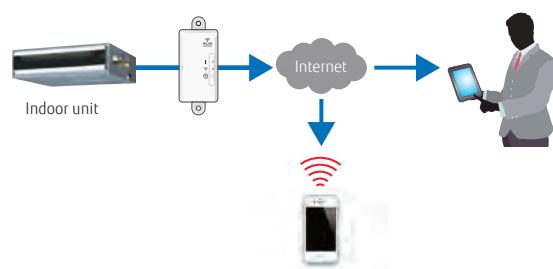

## Specifications

| Model name                  | UTY-TFNXZ1 / UTY-TFSXZ1 | UTY-TFSXW1   |
|-----------------------------|-------------------------|--------------|
| Dimensions (H × W × D) (mm) | 71 × 38 × 15            | 71 × 38 × 15 |
| Weight (g)                  | 85                      | 35           |



## PRODUCT LINEUP: CONTROL SYSTEM-CONVERTOR/ADAPTOR

### Wireless LAN Interface

FJ-RC-WIFI-1




Max. Connectable

**1 Single indoor unit**

**IntesisHome®**

- It is the most advanced solution to remotely manage an Air Conditioning system using all sort of mobile devices such as Smartphones, Tablets and PC
- No separate external power supply required
- Can be used for single indoor units and group controlled (up to 16) indoor units

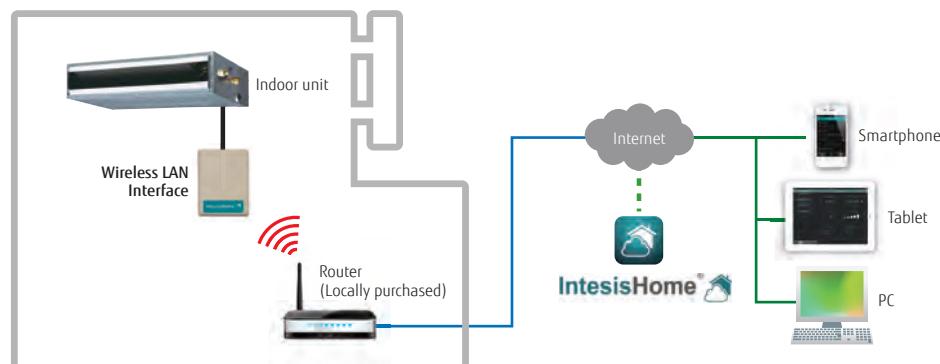

#### Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed setting
- Louver position (Airflow direction setting)
- Room temperature display
- Set temperature control
- Multi Language
- One Scene and Timer



(Application screen image)

#### Advanced control (Optional functions)

- Climate working modes (ECO, Comfort, Powerful) (future release)
- Schedule functions (ON/OFF, Modes, Set point temperature, Fan Speed, Louver position)
- Set temperature limitation (future release)
- Multiple Scenes & Timers and Calendar function


#### Notifications and history

- Alerts e-mail notification (future release)
- Air conditioning malfunction alerts
- Connectivity monitoring and alerts
- History (future release)

#### Specifications

|                             |               |
|-----------------------------|---------------|
| Model name                  | FJ-RC-WIFI-1  |
| Dimensions (H × W × D) (mm) | 108 × 70 × 28 |
| Weight (g)                  | 80            |





# External Switch Controller

UTY-TERX



Max. Controllable  
1 group

## Air conditioner switching can be controlled by connecting other sensor switches

- In combination with a field supply Card-Key Switch or other sensor, the External Switch Controller allows control of the ON / OFF, Room temperature, Fan speed and Master control functions. This makes this product suitable for installations such as hotel rooms.
- Card-key or other sensor switches are available as a locally purchased parts.
- 2-wire type
- The set temperature can be specified at two points for cooling and heating individually (4 points).

## Installation example

Human sensor catches movements of people in a room, and operates with lower capacity when people come back to the room, it automatically returns to previous operation mode.



Human sensor equipment needs to be purchased locally.  
Human sensor is not mounted on the External Switch Controller.


# Signal Amplifier

UTY-VSGXZ1



- Transmission Line length can be extended up to 3,600 m with multiple Signal Amplifiers.
- Up to 8 signal amplifiers can be installed in a VRF network system.
- A signal amplifier is required,
  - When the total wiring length of the transmission line exceeds 500 m.
  - When the total number of units on the transmission line exceeds 64.

## Installation example

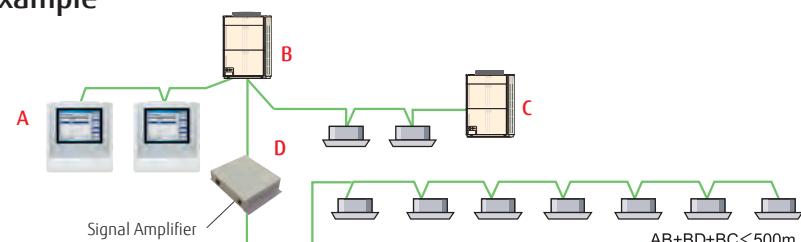

## Specifications

| Model name                  | UTY-TERX       |
|-----------------------------|----------------|
| Power Supply                | DC 6.5-16 V    |
| Dimensions (H × W × D) (mm) | 140 × 117 × 43 |
| Weight (g)                  | 250            |

DC 12 V is supplied by the indoor unit.

| Model name                  | UTY-VSGXZ1                       |
|-----------------------------|----------------------------------|
| Power Supply                | 208-240 V 50/60 Hz, Single phase |
| Power Consumption (W)       | 4.5                              |
| Dimensions (H × W × D) (mm) | 67 × 288 × 211                   |
| Weight (g)                  | 1,500                            |

## PRODUCT LINEUP: CONTROL SYSTEM-CONVERTOR/ADAPTOR

### Network Convertor for Single Split

UTY-VTGX / UTY-VTGXV




Max. Controllable  
**16**  
single indoor units

Max. Controllable  
**100**  
Network Convertors


- The network convertors are required when connecting single split system to VRF network system.
- Compact and light weight design
- Connectable to both types of 2-wire and 3-wire remote controllers

#### Installation example.


- 2 types of 1 remote controller type and 2 remote controllers type are available.
- Power supply (AC220-240V, 50/60 Hz) is required for 2 remote controllers type.

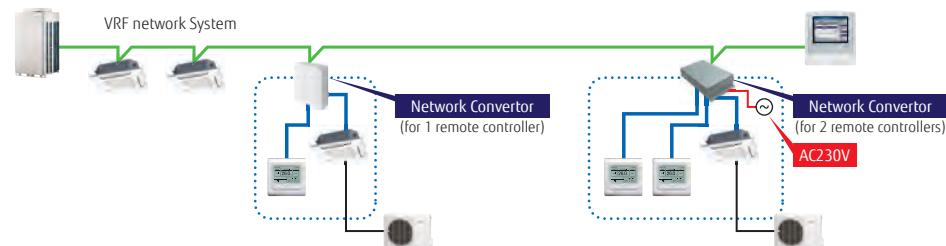

- 2-wire and 3-wire type of the wired remote controller can be connectable.

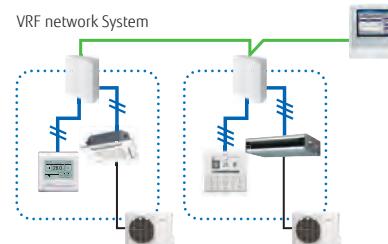

- A central control can be provided for the single split systems. (Up to 100 units of Network Convertor is connectable in one VRF network system)

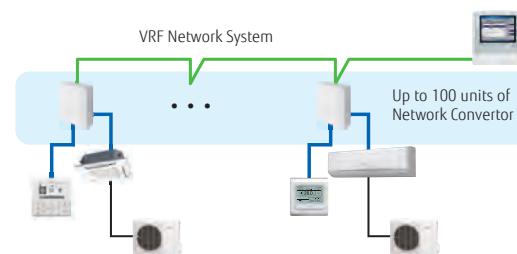

#### Specifications

| Model name                  | UTY-VTGX             |                          | UTY-VTGXV          |
|-----------------------------|----------------------|--------------------------|--------------------|
| Power Supply                | polar 3-wire DC 12 V | non-polar 2-wire DC 12 V | 220-240 V 50/60 Hz |
| Input power (W)             | Max. 1.2             |                          | Max. 3             |
| Dimensions (H × W × D) (mm) | 140 × 117 × 43       |                          | 54 × 260 × 150     |
| Weight (g)                  | 250                  |                          | 1,100              |

# CONTROL SYSTEM LIST


For SPLIT & MULTI SPLIT  
For VRF



## PRODUCT LINEUP: CONTROL SYSTEM

### CONTROL SYSTEM LIST for SPLIT/MULTI SPLIT

| Type   |  | Indoor unit       |                             |                                |                              |                              |                              |                              |                                  |                              |   |   |
|--|--|-------------------|-----------------------------|--------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|----------------------------------|------------------------------|---|---|
|  |  | Wall Mounted      |                             |                                |                              |                              |                              |                              |                                  | Cassette                     |   |   |
|  |  | Flagship Range    | Designer Range              | Standard Range                 | ECO Range                    | Designer Range               |                              | Standard Range               |                                  |                              | ECO Range   |   |
|  |  | ASYG<br>09/12KXCA | ASYG<br>07/09/12/14<br>KGTA | ASYG<br>07/09/12/14<br>KMTA    | ASYG<br>18/24KLCA            | ASYG<br>09/12LTCA            | ASYG<br>07/09/12/14<br>LUCA  | ASYG<br>07/09/12/14<br>LMCE  | ASYG<br>18/30LFCA,<br>ASYG24LFCC | ASYG<br>30/36LMTA            | ASYG<br>07/09/12<br>LLCE  | AUYG<br>12/14/18<br>LVLB,<br>AUYG24LVLA |
| Controllers                                      | Wired Remote Controller                          |                   |                             | ●<br>UTY-RNRYZ2+<br>UTY-TWRXZ2 |                              |                              |                              |                              |                                  | ●<br>UTY-RNRYZ2+<br>UTY-TWRX |   |   |
|  |  |                   |                             | ●<br>UTY-RLRY+<br>UTY-TWRXZ2   |                              |                              |                              |                              |                                  | ●<br>UTY-RLRY+<br>UTY-TWRX   |   |   |
|  |  |                   |                             |                                |                              |                              | ●<br>UTY-RVNYM+<br>UTY-TWBXF | ●<br>UTY-RVNYM+<br>UTY-XCBZ2 | ●<br>UTY-RVNYM                   | ●<br>UTY-RVNYM+<br>UTY-XWNX  | ●<br>UTY-RVNYM  |   |
|  |  |                   |                             |                                | ●<br>UTY-RNRYM+<br>UTY-TWBXF |                              | ●<br>UTY-RNRYM+<br>UTY-TWBXF | ●<br>UTY-RNRYM+<br>UTY-XCBZ2 | ●<br>UTY-RNRYM                   | ●<br>UTY-RNRYM+<br>UTY-XWNX  | ●<br>UTY-RNRYM  |   |
| Simple Remote Controller                         | Simple Remote Controller                         | <br>2-wire type   | <br>3-wire type             |                                | ●<br>UTY-RSRY,<br>UTY-RHRY   | ●<br>UTY-RSNYM+<br>UTY-TWBXF |                              | ●<br>UTY-RSNYM+<br>UTY-TWBXF | ●<br>UTY-RSNYM+<br>UTY-XCBZ2     | ●<br>UTY-RSNYM               | ●<br>UTY-RSNYM+<br>UTY-XWNX,<br>UTY-RSRY<br>UTY-RHRY+<br>UTY-XWRX |   |
|  |  |                   |                             |                                |                              |                              |                              |                              |                                  |                              | ●<br>UTY-RSNYM  |   |
| Central Remote Controller                        | Central Remote Controller                        |                   |                             |                                |                              |                              |                              |                              |                                  |                              |   |   |
|  |  | <br>For Duct      | <br>For Cassette            |                                |                              |                              |                              |                              |                                  |                              |   |   |
| IR Receiver Unit with Wireless Remote Controller | IR Receiver Unit with Wireless Remote Controller | <br>For Duct      | <br>For Cassette            |                                |                              |                              |                              |                              |                                  |                              |   |   |
|  |  |                   |                             |                                |                              |                              |                              |                              |                                  |                              |   |   |
| Interface  | MODBUS Convertor                                 |                   |                             |                                |                              |                              |                              |                              |                                  | ●<br>UTY-VMSX                |   |   |
|  | MODBUS Interface                                 |                   |                             |                                |                              |                              |                              | ●<br>FJ-RC-MBS-1             |                                  |                              | ●<br>FJ-RC-MBS-1  |   |
|  | KNX Convertor                                    |                   |                             |                                |                              |                              |                              |                              |                                  | ●<br>UTY-VKSX                |   |   |
|  | KNX Interface                                    |                   |                             |                                |                              | ●<br>FJ-RC-KNX-1i            |                              | ●<br>FJ-RC-KNX-1i            |                                  |                              | ●<br>FJ-RC-KNX-1i   |   |
|  | Wireless LAN Interface                           | <br>UTY-TFSXW1    |                             |                                |                              |                              |                              | ●<br>UTY-TFNXZ1              |                                  |                              | ●<br>UTZ-TFNXZ1   |   |
|  |  | <br>FJ-RC-WIFI-1  |                             |                                |                              |                              |                              |                              |                                  |                              | ●<br>FJ-RC-WIFI-1   |   |
|  | External Switch Controller                       |                   |                             | ●<br>UTY-TERX                  |                              |                              |                              | ●<br>UTY-TERX                |                                  |                              | ●<br>UTY-TERX   |   |



| Cassette                                 |  | Indoor unit                              |                          |  |  |                          |  |                          | Outdoor unit              | Other  |                            |                        |
|--|--|--|--------------------------|--|--|--------------------------|--|--------------------------|---------------------------|--|----------------------------|------------------------|
| Circular Flow                            | 4-way Flow                                     | Mini                                     | Slim                     | Medium Static Pressure                       | Medium Static Pressure                         | High Static Pressure     | Big                                      | Floor                    | Floor/Ceiling             | Ceiling  | Single Phase               |                        |
|  |  |  |                          |  |  |                          |  |                          |                           |  | Branch Box (8 Rooms Multi) |                        |
| AUXG<br>18/24/30/<br>36/45/54<br>LRLB    | AUYG<br>30/36LRLE,<br>AUYG<br>36/45/54<br>LRLA | ARYG<br>12/14/18<br>LSLAP                | ARYG<br>12/14/18<br>LLTB | ARYG<br>12/14/18/24/<br>30/36/45/54<br>LHTBP | ARYG<br>24/36/45<br>LMLA,<br>ARYG<br>30/36LMLE | ARYG<br>45/54/60<br>LHTA | ARYG<br>72/90LHTA                        | AGYG<br>09/12/14<br>LVCA | ABYG18LVTB,<br>ABYG24LVTA | ABYG<br>30/36<br>LRTE,<br>ABYG<br>36/45/54<br>LRTA | AOYG36LBLA5<br>AOYG45LBLA6 | UTP-PY03A<br>UTP-PY02A |
| ●<br>UTY-RNRYZ2                          |  | ●<br>UTY-RNRYZ2                          |                          | ●<br>UTY-RNRYZ2                              |  |                          | ●<br>UTY-RNRYZ2                          |                          |                           |  |                            |                        |
| ●<br>UTY-RLRY                            |  | ●<br>UTY-RLRY                            |                          | ●<br>UTY-RLRY                                |  |                          | ●<br>UTY-RLRY                            |                          |                           |  |                            |                        |
| ●<br>UTY-RVNYM                           |  |  |                          |  |  |                          |  |                          |                           |  |                            |                        |
| ●<br>UTY-RNNYM                           |  |  |                          |  |  |                          |  |                          |                           |  |                            |                        |
| ●<br>UTY-RSRY,<br>UTY-RHRY,<br>UTY-RSNYM | ●<br>UTY-RSNYM                                 | ●<br>UTY-RSRY,<br>UTY-RHRY,<br>UTY-RSNYM | ●<br>UTY-RSNYM           | ●<br>UTY-RSRY,<br>UTY-RHRY,<br>UTY-RSNYM     | ●<br>UTY-RSNYM                                 |                          | ●<br>UTY-RSRY,<br>UTY-RHRY,<br>UTY-RSNYM | ●<br>UTY-RSNYM           | ●<br>UTY-RSNYM            |  |                            |                        |
|  |  |  |                          |  |  |                          |  |                          |                           |  | ●<br>UTY-DMMYM             |                        |
|  | ●<br>UTY-LRHYA2                                |  | ●<br>UTY-LRHYM           |  | ●<br>UTY-LRHYM                                 | ●<br>UTY-LRHYM (60 only) | ●<br>UTY-LRHYM                           |                          |                           |  |                            |                        |
| ●<br>UTY-LBTYC                           |  | ●<br>UTY-LBTYM                           |                          | ●<br>UTY-VMSX                                |  |                          | ●<br>UTY-VMSX                            | ●<br>FJ-RC-MBS-1         |                           |  |                            |                        |
|  | ●<br>FJ-RC-MBS-1                               |  | ●<br>FJ-RC-MBS-1         |  | ●<br>FJ-RC-MBS-1                               |                          |  |                          | ●<br>FJ-RC-MBS-1          |  |                            |                        |
| ●<br>UTY-VKSX                            |  | ●<br>UTY-VKSX                            |                          | ●<br>UTY-VKSX                                |  |                          | ●<br>UTY-VKSX                            | ●<br>FJ-RC-KNX-1i        |                           |  |                            |                        |
|  | ●<br>FJ-RC-KNX-1i                              |  | ●<br>FJ-RC-KNX-1i        |  | ●<br>FJ-RC-KNX-1i                              |                          |  |                          | ●<br>FJ-RC-KNX-1i         |  |                            |                        |
| ●<br>UTZ-TFNXZ1                          | ●<br>UTZ-TFSXZ1                                |  |                          | ●<br>UTZ-TFNXZ1                              |  | ●<br>UTZ-TFSXZ1          |  | ●<br>UTY-TFNXZ1          |                           |  |                            |                        |
| ●<br>FJ-RC-WIFI-1                        |  |  |                          | ●<br>FJ-RC-WIFI-1                            |  |                          |  | ●<br>FJ-RC-WIFI-1        |                           |  |                            |                        |
| ●<br>UTY-TERX                            |  |  |                          |  |  |                          |  |                          |                           |  |                            |                        |

SPLIT

MULTI SPLIT

VRV

VENTILATION



CONTROL SYSTEM

AIR TO WATER

## PRODUCT LINEUP: CONTROL SYSTEM

### CONTROL SYSTEM LIST for VRF

| Type        |  | Indoor unit                              |  |                             |   |  |   |                             |                                      |
|-------------|--|--|--|-----------------------------|---|--|---|-----------------------------|--------------------------------------|
|             |  | Cassette                                 |  |                             |   |  | Duct  |                             |                                      |
|             |  | Compact Grid type /Standard type         | 4-way (Slim)                             | 4-way (Large)               | Circular Flow (Slim)                            | Circular Flow (Large)                    | Mini (With drain pump)                      | Slim (With drain pump)      | Medium Static Pressure               |
|             | AUXB<br>04GBLH,<br>AUXB<br>07/09/12/<br>14/18/24<br>GALH | AUXD<br>18/24/30/<br>34/36/45/54<br>GALH | AUXA<br>18/24/30/<br>34/36/45/54<br>GALH | AUXM<br>018/024/030<br>GLAH | AUXK<br>018/024/030/<br>034/036/045/054<br>GLAH | ARXK<br>04/07/09/<br>12/14/18/24<br>GCLH | ARXD<br>04/07/09/<br>12/14/18/24<br>GALH    | ARXA<br>24/30/36/45<br>GBLH | ARXC<br>36GBTB,<br>ARXC<br>45/60GATH |
| Controllers | Wired Remote Controller                                  |  |  |                             |   |  | ●<br>UTY-RNRYZ2                             |                             |                                      |
|             |  |  |  |                             |   |  | ●<br>UTY-RLRY                               |                             |                                      |
|             | Simple Remote Controller                                 | <br>2-wire type    3-wire type           |  |                             |   |  | ●<br>UTY-RSRY, UTY-RHRY, UTY-RSKY, UTY-RHKY |                             |                                      |
|             | Wireless Remote Controller                               |  |  |                             |   |  | ●<br>UTY-LNHY                               |                             |                                      |
|             | Group Remote Controller                                  |  |  |                             |   | ●<br>UTY-CGGY + UTY-VGGXZ1               |   |                             |                                      |
|             | Central Remote Controller                                |  |  |                             |   | ●<br>UTY-DCGY                            |   |                             |                                      |
|             | Touch Panel Controller                                   |  |  |                             |   | ●<br>UTY-DTGYZ1                          |   |                             |                                      |
|             | System Controller, System Controller Lite                |  |  |                             |   | ●<br>UTY-APGXZ1, UTY-ALGXZ1              |   |                             |                                      |
|             | IR Receiver Unit   |  |  | ●<br>UTY-LRHBY1             |   | ●<br>UTY-LBHDXD                          |   | ●<br>UTB-YWC                |                                      |
| Interface   | MODBUS Convertor   |  | ●<br>UTY-VMGX                            |                             |   | ●<br>UTY-VMGX<br>UTY-VMSX                | ●<br>UTY-VMGX                               |                             |                                      |
|             | MODBUS Interface   |  | ●<br>FJ-RC-MBS-1                         |                             |   |  |   | ●<br>FJ-RC-MBS-1            |                                      |
|             | KNX Convertor  |  | ●<br>UTY-VKGX                            |                             |   | ●<br>UTY-VKGX<br>UTY-VKSX                | ●<br>UTY-VKGX                               |                             |                                      |
|             | KNX Interface  |  | ●<br>FJ-RC-KNX-1i                        |                             |   |  |   | ●<br>FJ-RC-KNX-1i           |                                      |
|             | Wireless LAN Interface                                   |  |  |                             |   | ●<br>UTY-TFSXZ1                          |   |                             |                                      |
|             |  |  | ●<br>FJ-RC-WIFI-1                        |                             |   |  |   | ●<br>FJ-RC-WIFI-1           |                                      |
|             | External Switch Controller                               |  | ●<br>UTY-TERX                            |                             |   |  |   |                             |                                      |



SPLIT

MULTI SPLIT


VRF

VENTILATION

CONTROL SYSTEM

AIR TO WATER

| Duct                                   |   | Floor                                   |                             | Ceiling/<br>Floor           | Ceiling                     | Indoor unit                 |                     |                     |                   |                     | Wall Mounted |                 |   |                 |  |
|--|---|---|-----------------------------|-----------------------------|-----------------------------|-----------------------------|---------------------|---------------------|-------------------|---------------------|--------------|-----------------|---|-----------------|--|
| High Static<br>Pressure                | —                                       | EEV<br>external                         | —                           |                             |                             | EEV<br>external             | —                   | EEV<br>external     | —                 | EEV<br>external     | —            | EEV<br>external | — | EEV<br>external |  |
| ARXC<br>72/90GBTH,<br>ARXC<br>96GATH   | AGYA<br>004/007/<br>009/012/014<br>GCAH | AGYE<br>004/007/<br>009/012/014<br>GCAH | ABYA<br>12/14/18/24<br>GATH | ABYA<br>30/36/45/54<br>GATH | ASYA<br>004/007/009<br>GTAH | ASYE<br>004/007/009<br>GTAH | ASYA<br>012/014GCAH | ASYE<br>012/014GCAH | ASYA<br>18/24GBCH | ASYA<br>030/034GTAH | —            | —               | — | —               |  |
| —                                      | —                                       | —                                       | —                           | —                           | —                           | —                           | —                   | —                   | —                 | —                   | —            | —               | — | —               |  |
| UTY-RNRYZ2                             | —                                       | —                                       | —                           | —                           | —                           | —                           | —                   | —                   | —                 | —                   | —            | —               | — | —               |  |
| UTY-RLRY                               | —                                       | —                                       | —                           | —                           | —                           | —                           | —                   | —                   | —                 | —                   | —            | —               | — | —               |  |
| UTY-RSRY, UTY-RHRY, UTY-RSKY, UTY-RHKY | —                                       | —                                       | —                           | —                           | —                           | —                           | —                   | —                   | —                 | —                   | —            | —               | — | —               |  |
| UTY-LNHY                               | —                                       | —                                       | —                           | —                           | —                           | —                           | —                   | —                   | —                 | —                   | —            | —               | — | —               |  |
| UTY-CGGY + UTY-VGGXZ1                  | —                                       | —                                       | —                           | —                           | —                           | —                           | —                   | —                   | —                 | —                   | —            | —               | — | —               |  |
| UTY-DCGY                               | —                                       | —                                       | —                           | —                           | —                           | —                           | —                   | —                   | —                 | —                   | —            | —               | — | —               |  |
| UTY-DTGYZ1                             | —                                       | —                                       | —                           | —                           | —                           | —                           | —                   | —                   | —                 | —                   | —            | —               | — | —               |  |
| UTY-APGXZ1, UTY-ALGXZ1                 | —                                       | —                                       | —                           | —                           | —                           | —                           | —                   | —                   | —                 | —                   | —            | —               | — | —               |  |
| UTB-YWC                                | —                                       | —                                       | —                           | —                           | —                           | —                           | —                   | —                   | —                 | —                   | —            | —               | — | —               |  |
| UTY-VMGX                               | ●                                       | ●                                       | ●                           | ●                           | ●                           | ●                           | ●                   | ●                   | ●                 | ●                   | ●            | ●               | ● | ●               |  |
| UTY-VMGX                               | ●                                       | ●                                       | ●                           | ●                           | ●                           | ●                           | ●                   | ●                   | ●                 | ●                   | ●            | ●               | ● | ●               |  |
| UTY-VKGX                               | ●                                       | ●                                       | ●                           | ●                           | ●                           | ●                           | ●                   | ●                   | ●                 | ●                   | ●            | ●               | ● | ●               |  |
| FJ-RC-KNX-1i                           | ●                                       | ●                                       | ●                           | ●                           | ●                           | ●                           | ●                   | ●                   | ●                 | ●                   | ●            | ●               | ● | ●               |  |
| UTY-TFSXZ1                             | ●                                       | ●                                       | ●                           | ●                           | ●                           | ●                           | ●                   | ●                   | ●                 | ●                   | ●            | ●               | ● | ●               |  |
| FJ-RC-WIFI-1                           | ●                                       | ●                                       | ●                           | ●                           | ●                           | ●                           | ●                   | ●                   | ●                 | ●                   | ●            | ●               | ● | ●               |  |
| UTY-TER                                | ●                                       | ●                                       | ●                           | ●                           | ●                           | ●                           | ●                   | ●                   | ●                 | ●                   | ●            | ●               | ● | ●               |  |



## PRODUCT LINEUP: OPTIONAL PARTS

# OPTIONAL PARTS OVERVIEW

for SPLIT & MULTI SPLIT, VRF

Various optional parts are provided to install the selected indoor unit properly according to the environment.

## Optional Parts For Cassette



### Human Sensor Kit

The room temperature can be controlled by detecting the temperature accurately from the built-in sensor




### Cassette Grille

Cassette grille lineup matching the various interior is available. In addition, grid ceiling type cassette grille is also added to the lineup.



### Fresh Air Intake Kit


Fresh air can be taken in by a fan which can be connected using external control unit.



### Insulation for High Humidity


For Compact Cassette type/ Cassette type

Insulation for High Humidity is used when the installation location is in the high humidity environment.




### Air Outlet Shutter Plate

According to the installation site, the number of outlet directions can be changed to 3 directions by Air Outlet Shutter Plate.



### Wide Panel

When the cassette type is installed at the narrow space above ceiling, the space can be filled in by Wide Panel.

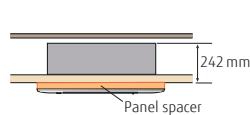

### Panel Spacer

When the space above the ceiling is low and the main body is projected out of the ceiling surface, Panel Spacer can be used as decoration




## Optional Parts For Floor



### Half Concealed Kit

This kit is used to half conceal floor type indoor unit into the wall.



SPLIT

MULTI SPLIT

VRF

VENTILATION

CONTROL SYSTEM

AIR TO WATER



## Optional Parts For Duct & Ceiling



### Auto Louver Grille Kit

Simple flat Auto louver will provide comfort airflow and harmonize with luxury Interior



### Remote Sensor Unit

New amenity space can be offered by installing the Remote sensor.



### Long Life Filter

Grit and dust can be caught sufficiently. In consideration of running cost, long-life design is achieved.



### Flange

Flange is used for Medium Static Pressure Duct type and Ceiling type to connect between pipes.



### Drain Pump Unit

This device can drain the collected water during operation.



## Connection Parts



### Communication Kit

For wall mounted type, this kit is required when External Connect kit & Set or wired remote controller is connected to indoor unit.




### External Input and Output PCB

For Wall mounted, Duct, or Cassette type, these parts are required when external input and output function is used.



For Wall Mounted type



### External Connect Kit & Set

These wires can connect between the product PCB and external device.




### Connection Units

Connection units are provided to separate the pipes at the connection of multiple indoor units in Multi type or VRF system.



### External Input and Output PCB Box & Bracket

These are the box and bracket for installing the External input and output PCB



## PRODUCT LINEUP: OPTIONAL PARTS

### Auto Louver Grille Kit

UTD-GXTA-W / UTD-GXTB-W / UTD-GXTC-W



Simple flat Auto Louver will provide comfort airflow and harmonize with luxury interior.




Closed louver


Opened louver

#### Flexible Control

- **Operation with indoor unit**  
Auto Louver can be operated by synchronizing remote controller of indoor unit.
- **UP and Down auto swing**
  - Auto airflow direction and auto swing
  - 4 steps selectable
- **Auto-closing louver**  
When operation of indoor unit is stopped, the louver will automatically close.

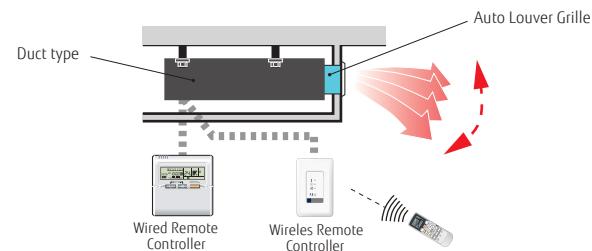


#### Dimensions

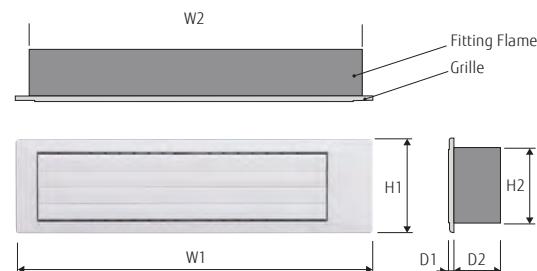

| Unit:mm    |       |       |     |     |    |    |
|------------|-------|-------|-----|-----|----|----|
| Model Name | W1    | W2    | H1  | H2  | D1 | D2 |
| UTD-GXTA-W | 683   | 645   |     |     |    |    |
| UTD-GXTB-W | 883   | 845   | 180 | 148 | 9  | 84 |
| UTD-GXTC-W | 1,083 | 1,045 |     |     |    |    |

#### Specifications

| Model name                   |         | UTD-GXTA-W  | UTD-GXTB-W   | UTD-GXTC-W                                   |
|------------------------------|---------|---|--|--|
| Applicable Indoor Unit       |         | ARYG07/09LLTA<br>ARYG12/14LLTB<br>ARXD04/07/09/12/14GALH (For VRF)<br>ARXK07/09/12/14GCLH (For VRF) | ARYG18LLTB<br>ARXD18GALH (For VRF)<br>ARXK18GCLH (For VRF) | ARXD24GALH (For VRF)<br>ARXK24GCLH (For VRF) |
| Power Supply                 |         | Connecting with Control box of indoor unit  |  |  |
| Fixing of Auto Louver Grille |         | Screw fixing to Flange or Square Duct   |  |  |
| Extension Square Duct Limit  |         | 1.0m (Max. duct length between indoor unit and Grille)  |  |  |
| Net Dimension (H × W × D)    |         | 180×683×(84+9)  | 180×883×(84+9)   | 180×1083×(84+9)                              |
| Weight                       | Net     | kg (lbs)  | 2.0 (4.4)  | 2.5 (5.6)                                    |
|                              | Gross   |   | 3.0 (6.7)  | 3.5 (7.8)                                    |
| Color                        |         | White   |  |  |
| Louver Motor                 |         | Stepping Motor  |  |  |
| Accessories                  |         | Fitting Flame, etc.   |  |  |
| Operation range              | Cooling | °C  | 18 to 32   |  |
|                              |         | % RH  | 80% or less  |  |
|                              | Heating | °C  | 16 to 30   |  |



SPLIT

MULTI SPLIT

VRF

VENTILATION

CONTROL SYSTEM

AIR TO WATER

# OPTIONAL PARTS LIST


For SPLIT & MULTI SPLIT

For VRF

FUNCTION LIST

SEPARATION TUBE etc.






## PRODUCT LINEUP: OPTIONAL PARTS

### OPTIONAL PARTS LIST for SPLIT/MULTI SPLIT



|                              |  | Indoor unit   |   |  |                           |  |  |  |                          |                   |                          | Floor  | Ceiling |  |  |
|------------------------------|--|---|---|--|---------------------------|--|--|--|--------------------------|-------------------|--------------------------|--|---------|--|--|
|                              |  | Cassette  |   |  | Duct                      |  |  |  |                          |                   |                          |  |         |  |  |
|                              |  | 4-way Flow Compact  | Circular Flow                               | 4-way Flow                                     | Mini                      | Slim                                       | Medium Static Pressure                       | Medium Static Pressure                         | High Static Pressure     | Big               |                          |  |         |  |  |
|                              |  | AUYG<br>12/14/18<br>LVLB,<br>AUYG<br>24LVLA                       | AUXG<br>18/24/30/<br>36/45/54<br>LRLB       | AUYG<br>30/36LRLE,<br>AUYG<br>36/45/54<br>LRLA | ARYG<br>12/14/18<br>LSLAP | ARYG<br>12/14/18<br>LLTB                   | ARYG<br>12/14/18/24/<br>30/36/45/54<br>LHTBP | ARYG<br>24/36/45<br>LMLA,<br>ARYG<br>30/36LMLE | ARYG<br>45/54/60<br>LHTA | ARYG<br>72/90LHTA | AGYG<br>09/12/14<br>LVCA | ABYG<br>30/36LRTE,<br>ABYG<br>36/45/54<br>LRTA |         |  |  |
| Human Sensor Kit             |  |   |   | ●<br>UTY-SHZXC                                 |                           |  |  |  |                          |                   |                          |  |         |  |  |
| Remote Sensor Unit           |  | New amenity space can be offered by installing the Remote sensor. |   |  |                           |  | ●<br>UTY-XSZX                                |  |                          |                   |                          |  |         |  |  |
| Cassette Grille              | <br>UTG-UFYD-W<br>UTG-UGYA-W<br>UTG-UKYA-W<br>UTG-UKYG-W<br>UTG-UKYA-B     | ●<br>UTG-UFYD-W   | ●<br>UTG-UKYA-W<br>UTG-UKYC-W<br>UTG-UKYA-B | ●<br>UTG-UGYA-W                                |                           |  |  |  |                          |                   |                          |  |         |  |  |
| Auto Louver Grille Kit       |  |   |   |  |                           | ●<br>UTD-GXTA-W (12/14)<br>UTD-GXTB-W (18) |  |  |                          |                   |                          |  |         |  |  |
| Long Life Filter             |  |   |   |  |                           |  | ●<br>UTD-LFNA<br>UTD-LFNB<br>UTD-LFNC        | ●<br>UTD-LF25NA                                | ●<br>UTD-LF60KA (45/54)  | ●<br>UTD-LFKA     |                          |  |         |  |  |
| Flange                       |  |   |   |  |                           |  |  | ●<br>UTD-SF045T<br>UTD-RF204                   |                          |                   |                          | ●<br>UTD-RF204                                 |         |  |  |
| Drain Pump Unit              |  |   |   |  |                           |  |  | ●<br>UTZ-PX1NBA                                | ●<br>UTZ-PX1NAB          |                   |                          | ●<br>UTR-DPB24T                                |         |  |  |
| Wide Panel                   | <br>Indoor unit<br>Panel 600 (mm)<br>4500                                  |   |   | ●<br>UTG-AKXA-W                                |                           |  |  |  |                          |                   |                          |  |         |  |  |
| Panel Spacer                 | <br>24.2 mm<br>Panel spacer  |   |   | ●<br>UTG-BKXA-W                                |                           |  |  |  |                          |                   |                          |  |         |  |  |
| Fresh Air Intake Kit         | For Compact Cassette<br><br>For Cassette Cassette                          | ●<br>UTZ-VXAA   |   | ●<br>UTZ-VXRA                                  |                           |  |  |  |                          |                   |                          |  |         |  |  |
| Air Outlet Shutter Plate     | For Compact Cassette<br><br>For Cassette                                   | ●<br>UTR-YDZB   |   | ●<br>UTR-YDZK                                  |                           |  |  |  |                          |                   |                          |  |         |  |  |
| Insulation for High Humidity | For Compact Cassette type/<br>Cassette type<br>                            | ●<br>UTZ-KXGC   |   | ●<br>UTZ-KXRA                                  |                           |  |  |  |                          |                   |                          |  |         |  |  |
| Half Concealed Kit           | This kit is used to half conceal floor type indoor unit into the wall.<br> |   |   |  |                           |  |  |  |                          |                   | ●<br>UTR-STA             |  |         |  |  |

• There are no optional parts for Floor/Ceiling type and Wall Mounted type.




# OPTIONAL PARTS LIST for VRF



|  |                | Indoor unit  |   |  |                                       |  |                           |                                |                                |                                      |                                      |                          | Ceiling      |  |
|--|----------------|--|---|--|---------------------------------------|--|---------------------------|--------------------------------|--------------------------------|--------------------------------------|--------------------------------------|--------------------------|--------------|--|
|  |                | Cassette   |   |  |                                       |  | Duct                      |                                |                                |                                      | Floor                                |                          |              |  |
|  |                | Compact Grid type / Standard type                                      | 4-way (Slim)                                | 4-way (Large)                                | Circular Flow (Slim)                  | Circular Flow (Large)                                | Mini (With drain pump)    | Slim (With drain pump)         | Medium Static Pressure         | High Static Pressure                 |                                      | —                        | EEV external |  |
| AUXB 04GBLH,<br>AUXB 07/09/12/<br>14/18/24<br>GALH | AUXD 18/24GALH | AUXA 18/24/30/<br>34/36/45/54<br>GALH                                  | AUXM 018/024/030<br>034/036/045/<br>054GLAH | AUXK 018/024/030/<br>034/036/045/<br>054GLAH | ARXK 04/07/09/<br>12/14/18/24<br>GCLH | ARXD 04/07/09/<br>12/14/18/24<br>GALH                | ARXA 24/30/36/45<br>GBLH  | ARXC 36GBTW,<br>ARXC 45/60GATH | ARXC 72/90GBTW,<br>ARXC 96GATH | AGYA 004/007/<br>009/012/014<br>GCAH | AGYE 004/007/<br>009/012/014<br>GCAH | ABYA 30/36/45/54<br>GATH |              |  |
| Human Sensor Kit                                   |                |  |   |  | ● UTY-SHZXC                           |  |                           |                                |                                |                                      |                                      |                          |              |  |
| Remote Sensor Unit                                 |                | New amenity space can be offered by installing the Remote sensor.      |   |  |                                       |  | ● UTY-XSZX                |                                |                                |                                      |                                      |                          |              |  |
| Cassette Grille                                    |                | ● UTG-UFYE-W<br>UTG-UFYC-W<br>UTG-UKYCW<br>UTG-UKYA-B                  |   |  | ● UTG-UKYC-W<br>UTG-UKYA-B            |  |                           |                                |                                |                                      |                                      |                          |              |  |
| Auto Louver Grille Kit                             |                |  |   |  |                                       | ● UTD-GXTA-W,<br>UTD-GXTB-W (18),<br>UTD-GXTC-W (24) |                           |                                |                                |                                      |                                      |                          |              |  |
| Long Life Filter                                   |                |  |   |  |                                       |  | ● UTD-LF25NA              | ● UTD-LF60KA                   |                                |                                      |                                      |                          |              |  |
| Flange   |                |  |   |  |                                       |  | ● UTD-SF045T<br>UTD-RF204 |                                |                                |                                      |                                      | ● UTD-RF204              |              |  |
| Drain Pump Unit                                    |                |  |   |  |                                       |  | ● UTZ-PX1NBA              |                                |                                |                                      |                                      | ● UTR-DPB24T             |              |  |
| Wide Panel   |                |  | ● UTG-AKXA-W<br>UTG-AGYA-W                  |  | ● UTG-AKXA-W                          |  |                           |                                |                                |                                      |                                      |                          |              |  |
| Panel Spacer                                       |                |  | ● UTG-BKXA-W<br>UTG-BGYA-W                  |  | ● UTG-BKXA-W                          |  |                           |                                |                                |                                      |                                      |                          |              |  |
| Fresh Air Intake Kit*1                             |                | ● UTZ-VXAA<br>For Compact Cassette<br>For Cassette                     |   | ● UTZ-VXRA                                   |                                       | ● UTZ-VXRA   |                           |                                |                                |                                      |                                      |                          |              |  |
| Air Outlet Shutter Plate                           |                | ● UTR-YDZB<br>For Compact Cassette<br>For Cassette                     |   | ● UTR-YDKZ                                   |                                       | ● UTR-YDKZ   |                           |                                |                                |                                      |                                      |                          |              |  |
| Insulation for High Humidity                       |                | ● UTZ-KXGC<br>For Compact Cassette type/<br>Cassette type              | ● UTZ-KXRA                                  | ● UTZ-KXRA                                   |                                       | ● UTZ-KXRA   |                           |                                |                                |                                      |                                      |                          |              |  |
| Half Concealed Kit                                 |                | This kit is used to half conceal floor type indoor unit into the wall. |   |  |                                       |  |                           |                                |                                |                                      | ● UTR-STA                            |                          |              |  |

\* There are no optional parts for Floor/Ceiling type and Wall Mounted type.



## PRODUCT LINEUP: OPTIONAL PARTS

### FUNCTION LIST for SPLIT/MULTI SPLIT


#### External Input and Output Function/External Connect Kit/Communication Kit

|        | Indoor unit                         |                             |                              |                                |                   |                              |                                |                                  |   |                          |   |   |   |
|--------|-------------------------------------|-----------------------------|------------------------------|--------------------------------|-------------------|------------------------------|--------------------------------|----------------------------------|---|--------------------------|---|---|---|
|        | Wall Mounted                        |                             |                              |                                |                   |                              |                                |                                  | Cassette  |                          |   |   |   |
|        | Flagship Range                      | Designer Range              | Standard Range               | ECO Range                      | Designer Range    |                              | Standard Range                 |                                  |   | ECO Range                | 4-way Flow Compact  | Circular Flow   | 4-way Flow                                      |
|        | ASYG<br>09/12KXCA                   | ASYG<br>07/09/12/14<br>KGTA | ASYG<br>07/09/12/14<br>KMTA  | ASYG<br>18/24KLCA              | ASYG<br>09/12LTCA | ASYG<br>07/09/12/14<br>LUCA  | ASYG<br>07/09/12/14<br>LMCE    | ASYG<br>18/30LFCa,<br>ASYG24LFCC | ASYG<br>30/36LMTA   | ASYG<br>07/09/12<br>LLCE | AUYG<br>12/14/18<br>LVLB,<br>AUYG24LVLA                     | AUXG<br>18/24/30/<br>36/45/54<br>LRB                          | AUYG<br>30/36/LRLB,<br>AUYG<br>36/45/54<br>LRLA |
| Input  | Operation/Stop                      |                             | ●<br>UTY-XCSXZ1+<br>UTY-XWZX | ●<br>UTY-TWBXF1+<br>UTY-XWZXZ5 |                   | ●<br>UTY-XWZXZ5 + UTY-TWBXF1 | ●<br>UTY-XWZXZ5+<br>UTY-XCBXZ2 | ●<br>UTY-XWZX                    | ●<br>● UTY-XWZX<br>● UTY-XWZX<br>+ UTY-XCSXZ1<br>+ UTZ-GXXB |                          | ●<br>● UTY-XWZX<br>● UTY-XWZX<br>+ UTY-XCSXZ1<br>+ UTZ-GXXB | ●<br>● PCB Terminal<br>● UTY-XWZX<br>● UTY-XCSX<br>+ UTZ-GXRA | ●<br>● UTY-XWZX                                 |
|        | Batch Stop                          |                             |                              |                                |                   |                              |                                |                                  |   |                          |   |   |   |
|        | Forced Stop                         |                             | ●<br>UTY-XCSXZ1+<br>UTY-XWZX |                                |                   | ●<br>UTY-XWZXZ5 + UTY-TWBXF1 | ●<br>UTY-XWZXZ5+<br>UTY-XCBXZ2 | ●<br>UTY-XWZX                    | ●<br>● UTY-XWZX<br>● UTY-XWZX<br>+ UTY-XCSXZ1<br>+ UTZ-GXXB |                          | ●<br>● UTY-XWZX<br>● PCB Terminal                           | ●<br>● PCB Terminal   | ●<br>● UTY-XWZX                                 |
|        | Emergency Stop                      |                             |                              |                                |                   |                              |                                |                                  |   |                          |   |   |   |
|        | Forced Thermostat off               |                             |                              |                                |                   |                              |                                |                                  | ●○<br>● UTY-XWZX<br>+ UTY-XCSXZ1<br>+ UTZ-GXXB              |                          |   | ●○<br>● UTY-XCSX<br>+ UTZ-GXRA                                |   |
|        | Low Noise Mode Operation            |                             |                              |                                |                   |                              |                                |                                  |   |                          |   |   |   |
|        | Cooling / Heating Priority          |                             |                              |                                |                   |                              |                                |                                  |   |                          |   |   |   |
|        | Outdoor Unit Operation Peak Control |                             |                              |                                |                   |                              |                                |                                  |   |                          |   |   |   |
| Output | Operation Status                    |                             | ●<br>UTY-XCSXZ1+<br>UTY-XWZX | ●<br>UTY-TWBXF1+<br>UTY-XWZXZ5 |                   | ○<br>UTY-XWZXZ5 + UTY-TWBXF1 | ○<br>UTY-XWZXZ5+<br>UTY-XCBXZ2 | ○<br>UTY-XWZX                    | ●<br>● UTY-XWZX<br>● UTY-XWZX<br>+ UTY-XCSXZ1<br>+ UTZ-GXXB | ○<br>● UTY-XWZX          | ●<br>● UTY-XWZXZG<br>● UTY-XCSX<br>+ UTZ-GXRA               | ○<br>● UTY-XWZX   | ○<br>● UTY-XWZX                                 |
|        | Error Status                        |                             | ●<br>UTY-XCSXZ1+<br>UTY-XWZX | ●<br>UTY-TWBXF1+<br>UTY-XWZXZ5 |                   | ○<br>UTY-XWZXZ5 + UTY-TWBXF1 | ○<br>UTY-XWZXZ5+<br>UTY-XCBXZ2 |                                  | ●<br>● UTY-XWZX<br>● UTY-XWZX<br>+ UTY-XCSXZ1<br>+ UTZ-GXXB |                          | ●<br>● UTY-XWZXZG<br>● UTY-XCSX<br>+ UTZ-GXRA               |   |   |
|        | Compressor status                   |                             | ●<br>UTY-XCSXZ1+<br>UTY-XWZX |                                |                   |                              |                                |                                  |   |                          |   |   |   |
|        | Indoor Unit Fun Operation Status    |                             |                              |                                |                   |                              |                                |                                  | ●<br>● UTY-XWZX<br>● UTY-XWZX<br>+ UTY-XCSXZ1<br>+ UTZ-GXXB |                          | ●<br>● UTY-XWZXZG<br>● UTY-XCSX<br>+ UTZ-GXRA               | ●<br>● UTY-XWZXZG<br>● UTY-XCSX<br>+ UTZ-GXRA                 | ●<br>● UTY-VXA <sup>1</sup>                     |
|        | Set point attainment status         |                             |                              |                                |                   |                              |                                |                                  | ●<br>● UTY-XWZX <sup>2</sup>                                |                          |   |   |   |
|        | Auxiliary Heater Output             |                             |                              |                                |                   |                              |                                |                                  |   |                          | ●<br>● UTY-XWZXZG<br>● UTY-XCSX<br>+ UTZ-GXRA               |   |   |
|        | Base Heater                         |                             |                              |                                |                   |                              |                                |                                  |   |                          |   |   |   |

\*1: This wire is included in Fresh air intake kit (UTZ-VXA or UTZ-VXRA) \*2: This function is for installing at server room.

#### For SPLIT/MULTI SPLIT/SIMULTANEOUS MULTI

| Communication Kit                                 | External input and output PCB   | External input and output PCB Box | External input and output PCB Bracket |
|---|---|-----------------------------------|---------------------------------------|
| UTY-TWBXF1/<br>UTY-XCBXZ2<br>UTY-TWRX<br>UTY-TWNX | UTY-XCSXZ1<br>for<br>Wall Mounted type and Cassette type<br>UTY-XCSX<br>for Duct<br>Cassette type | UTZ-GXXB<br>UTZ-GXRA<br>UTZ-GXNA  |                                       |



SPLIT

MULTI SPLIT

VRF

VENTILATION

CONTROL SYSTEM


AIR TO WATER

| Indoor unit               |                          |   |  |                          |                                       |                          | Outdoor unit              |  |                    |                   |                          |
|---------------------------|--------------------------|---|--|--------------------------|---------------------------------------|--------------------------|---------------------------|--|--------------------|-------------------|--------------------------|
|                           |                          | Duct  |  |                          | Floor                                 | Floor/Ceiling            | Ceiling                   | Single Phase                                   | Simultaneous Multi |                   |                          |
| Mini                      | Slim                     | Medium Static Pressure                          |  | High Static Pressure     |                                       |                          |                           | 8 Rooms Multi                                  | AOYG 36/45/54 LATT |                   |                          |
| ARYG<br>12/14/18<br>LSLAP | ARYG<br>12/14/18<br>LLTB | ARYG<br>12/14/18/24/<br>30/36/45/54<br>LHTBP    | ARYG<br>24/36/45<br>LMLA,<br>ARY36LMLE | ARYG<br>45/54/60<br>LHTA | ARYG<br>72/90LHTA                     | AGVG<br>09/12/14<br>LVCA | ABYG18LVTB,<br>ABYG24LVTA | ABYG<br>30/36LRTB,<br>ABYG<br>36/45/54<br>LRTA | AOYG45LBTB8        | AOYG<br>36/45LBTB | AOYG<br>36/45/54<br>LATT |
| PCB Terminal              | UTD-ECS5A                | PCB Terminal<br>or<br>● OUTY-XCSX +<br>UTZ-GXNA | UTD-ECS5A                              | UTD-ECS5A                | PCB Terminal<br>or<br>● ○<br>UTY-XCSX | UTY-XWZX                 | UTY-XWZX                  | UTY-XWZX                                       |                    |                   |                          |
|                           |                          |   |  |                          |                                       |                          |                           |  | UTY-XWZXZ3         |                   |                          |
| PCB Terminal              | UTD-ECS5A                | PCB Terminal                                    | UTD-ECS5A                              | UTD-ECS5A                | PCB Terminal                          | UTY-XWZX                 | UTY-XWZX                  | UTY-XWZX                                       |                    |                   |                          |
|                           |                          |   |  |                          |                                       |                          |                           |  | UTY-XWZXZ3         |                   |                          |
|                           |                          | UTY-XCSX  |  | UTD-ECS5A                | UTY-XCSX                              |                          |                           |  |                    |                   |                          |
|                           |                          |   |  |                          |                                       |                          |                           |  | UTY-XWZXZ3         | UTY-XWZXZ3        |                          |
|                           |                          |   |  |                          |                                       |                          |                           |  | UTY-XWZXZ3         | UTY-XWZXZ2        |                          |
| UTY-XWZXZG                | UTD-ECS5A                | ● UTY-XWZXZG<br>or<br>● OUTY-XCSX +<br>UTZ-GXNA | UTD-ECS5A                              | UTD-ECS5A                | ● UTY-XWZXZG<br>or<br>● OUTY-XCSX     | UTY-XWZX                 | UTY-XWZX                  | UTY-XWZX                                       |                    |                   |                          |
|                           |                          | ● UTY-XWZXZG<br>or<br>● OUTY-XCSX +<br>UTZ-GXNA |  |                          |                                       |                          |                           |  | UTY-XWZXZ3         | UTY-XWZXZ3        |                          |
| UTY-XWZXZG                | UTD-ECS5A                | ● UTY-XWZXZG<br>or<br>● OUTY-XCSX +<br>UTZ-GXNA | UTD-ECS5A                              | UTD-ECS5A                | ● UTY-XWZXZG<br>or<br>● OUTY-XCSX     |                          |                           |  | UTY-XWZXZ3         | UTY-XWZXZ3        |                          |
| UTY-XWZXZG                | UTD-ECS5A                | ● UTY-XWZXZG<br>or<br>● OUTY-XCSX +<br>UTZ-GXNA | UTD-ECS5A                              | UTD-ECS5A                | ● UTY-XWZXZG<br>or<br>● OUTY-XCSX     |                          |                           |  | UTY-XWZXZ4         |                   |                          |


### Communication system

#### External Connect Kit

##### For Indoor Unit



UTY-XWZX



UTY-XWZX5



UTY-XWZXZ

##### For Outdoor Unit



UTY-XWZXZ2




UTY-XWZXZ3




UTY-XWZXZ4

#### External Control Set

##### For Indoor unit



UTD-ECS5A



## PRODUCT LINEUP: OPTIONAL PARTS

### FUNCTION LIST for VRF

#### External Input and Output Function/External Connect Kit

|  | Indoor unit  |   |  |  |                             |   |   |   |                             |                             | Floor / Ceiling |  |
|--|--|---|--|--|-----------------------------|---|---|---|-----------------------------|-----------------------------|-----------------|--|
|  | Cassette   |   |  | Duct                                     |                             |   |   | Floor                                   |                             |                             |                 |  |
|  | Compact Grid type / Standard type  | 4-way   | Circular Flow                            | Mini (With drain pump)                   | Slim (With drain pump)      | Medium Static Pressure  | High Static Pressure                    | —                                       | EEV external                |                             |                 |  |
| AUXB<br>04GBLH,<br>AUXB<br>07/09/12/<br>14/18/24<br>GALH | AUXD<br>18/24GALH,<br>AUXA<br>18/24/30/<br>34/36/45/54<br>GALH   | AUXM<br>018/024/030<br>GLAH,<br>AUXK<br>018/024/030/<br>034/036/045/<br>054GLAH | ARXK<br>04/07/09/<br>12/14/18/24<br>GCLH | ARXD<br>04/07/09/<br>12/14/18/24<br>GALH | ARXA<br>24/30/36/45<br>GBLH | ARXC<br>36GBTM,<br>ARXC<br>45/60GATH,<br>ARXC<br>72/90GBTM,<br>ARXC<br>96GATH | AGYA<br>004/007/<br>009/012/014<br>GCAH | AGYE<br>004/007/<br>009/012/014<br>GCAH | ABYA<br>12/14/18/24<br>GATH | ABYA<br>30/36/45/54<br>GATH |                 |  |
| Input  | Operation / Stop<br>●UTY-XWZXZD<br>OUTY-XWZXZB<br><br>All On / All Off<br><br>Batch Stop<br><br>Forced Stop<br>●UTY-XWZXZD<br>OUTY-XWZXZB<br><br>Emergency Stop<br><br>Forced Thermostat off<br>●UTY-XWZXZE<br>OUTY-XWZXZ7<br><br>Low Noise Mode Operation<br><br>Cooling/ Heating Priority<br><br>Outdoor Unit Operation Peak Control<br><br>Power Usage Information from Electricity Meter |   |  |  |                             |   |   |   |                             |                             |                 |  |
| Output   | Operation Status<br>●UTY-XWZXZC<br><br>Error Status<br>●UTY-XWZXZC<br><br>Indoor Unit Fun Operation Status<br>●UTY-XWZXZC<br><br>Auxiliary Heater Output<br>●UTY-XWZXZC<br><br>Base Heater   |   |  |  |                             |   |   |   |                             |                             |                 |  |

\*2: Touch Panel Controller has these functions for Dry contact and Apply voltage, however, above External Connect Kit is not necessary because Touch Panel Controller has an external input terminal block.

#### Communication system

##### External Connect Kit


###### For Indoor unit

|            |  |
|------------|--|
| UTY-XWZXZ7 |  |
| UTY-XWZXZB |  |
| UTY-XWZXZC |  |

|            |  |
|------------|--|
| UTY-XWZXZD |  |
| UTY-XWZXZE |  |

###### For Outdoor unit

|            |  |
|------------|--|
| UTY-XWZXZ6 |  |
| UTY-XWZXZ9 |  |
| UTY-XWZXZF |  |



SPLIT

MULTI SPLIT

VRF

VENTILATION

CONTROL SYSTEM

AIR TO WATER

| Indoor unit   |   |                   | Outdoor unit        |   |   |                             |   |   |   | Controller             |             | Other  |
|---|---|-------------------|---------------------|---|---|-----------------------------|---|---|---|------------------------|-------------|--|
| Wall Mounted  |   |                   | J-IIIL              | J-III                                   | J-IIIS  | V-III                       | V-III Tropical                              | VR-II                                       | Central Remote Controller               | Touch Panel Controller | RB Unit     |  |
| ASYA<br>004/007/009<br>GTAH,<br>ASYA<br>012/014GCAH | ASYE<br>004/007/009<br>GTAH,<br>ASYE<br>012/014GCAH | ASYA<br>18/24GBCH | ASYA<br>030/034GTAH | AJG<br>072/090/108/<br>126/144<br>LELAH | AJY<br>040/045/054<br>LBLAH,<br>AJY<br>040/045/054<br>LELAH | AJY<br>040/045/054<br>LCLAH | AJY<br>072/090/108/<br>126/144/162<br>LNLBH | AJY<br>072/090/108/<br>126/144/162<br>LALBH | AJYA<br>072/090/<br>108/126/144<br>GALH | UTY-DCGY               | UTY-DTGYZ1  | UTP-RX01AH<br>UTP-RX01BH<br>UTP-RX01CH<br>UTP-RX04BH |
| ●UTY-XWZXZD<br>○UTY-XWZXZB                          |   |                   |                     |   |   |                             |   |   |   |                        |             |  |
|   |   |                   |                     |   |   |                             |   |   | ●UTY-XWZXZ7<br>○UTY-XWZXZ8              | ●*2<br>○*2             |             |  |
| ●UTY-XWZXZD<br>○UTY-XWZXZB                          |   |                   |                     |   |   |                             |   |   |   |                        |             |  |
| ●UTY-XWZXZD<br>○UTY-XWZXZB                          |   |                   |                     |   |   |                             |   |   | ●UTY-XWZXZ7<br>○UTY-XWZXZ8              | ●*2<br>○*2             |             |  |
| ●UTY-XWZXZE<br>○UTY-XWZXZ7                          |   |                   |                     |   |   |                             |   |   |   |                        |             |  |
|   |   |                   |                     |   |   |                             |   |   | ●UTY-XWZXZ6                             |                        |             |  |
|   |   |                   |                     |   |   |                             |   |   | ●UTY-XWZXZ6                             |                        |             |  |
|   |   |                   |                     |   |   |                             |   |   | ●UTY-XWZXZ6                             |                        |             |  |
| ●UTY-XWZXZC   |   |                   |                     |   |   |                             |   |   | ●UTY-XWZXZ6                             |                        | OUTY-XWZXZA |  |
| ●UTY-XWZXZC   |   |                   |                     |   |   |                             |   |   | ●UTY-XWZXZ6                             |                        | OUTY-XWZXZA |  |
| ●UTY-XWZXZC   |   |                   |                     |   |   |                             |   |   |   |                        |             |  |
|   |   |                   |                     |   |   |                             |   |   | ●UTY-XWZXZ9                             |                        | ●UTY-XWZXZ9 |  |

## For RB unit


- UTY-XWZXZ6
- UTY-XWZXZB

## For Central Remote Controller

- UTY-XWZXZ7
- UTY-XWZXZ8
- UTY-XWZXZA

## For Touch Panel Controller

- UTY-XWZXZA



## PRODUCT LINEUP: OPTIONAL PARTS

# SEPARATION TUBE etc.



### For SPLIT/MULTI SPLIT/SIMULTANEOUS MULTI

#### Separation Tube

UTP-SX236A / UTP-SX254A  
For 3-phase Simultaneous Multi

UTP-SX272A  
For Simultaneous Multi Twin /  
Triple / Double Twin




UTP-SX354A  
For 3-phase Simultaneous Multi

UTP-SX372A  
For Simultaneous Multi Twin /  
Triple / Double Twin




UTP-SX248A  
For 8 Rooms Multi



#### Branch Box

UTP-PY03A  
UTP-PY02A  
For 5-6 Rooms & 8 Rooms Multi




### For VRF

#### Separation Tube

UTP-AX054A



Liquid Pipe



UTP-AX090A



Liquid Pipe



UTP-AX180A



Liquid Pipe



UTP-AX567A



Liquid Pipe



UTP-BX090A



Discharge Gas Pipe



Liquid Pipe



UTP-BX180A



Discharge Gas Pipe



Liquid Pipe



UTP-BX567A



Discharge Gas Pipe



Liquid Pipe



UTP-LX180A



#### Header

UTR-H0906L / UTR-H1806L



Liquid Pipe



UTR-H0908L / UTR-H1808L



Liquid Pipe



UTR-J0906A / UTR-J1806A



Discharge Gas Pipe



Liquid Pipe

UTP-J0908A / UTP-J1808A



Discharge Gas Pipe



Liquid Pipe

#### Outdoor Unit Branch Kit

UTP-CX567A



Liquid Pipe




UTP-DX567A



Discharge Gas Pipe



Liquid Pipe



### For VRF

| EV Kit  | RB Unit   |  |
|---|---|--|
| Model code ≤ 09 : UTR-EV09XB<br>Model code ≥ 12 : UTR-EV14XB<br><b>For Compact Wall Mounted type</b><br> | UTP-RX01AH / UTP-RX01BH / UTP-RX01CH<br><b>Single type</b><br> | UTP-RX04BH<br><b>Multi type</b><br> |

SPLIT

MULTI SPLIT

VRF

VENTILATION

CONTROL SYSTEM

AIR TO WATER

# Specifications

### Separation Tube

| Model name                                 | UTP-AX054A   | UTP-AX090A   | UTP-AX180A   | UTP-AX567A   |
|--|--------------|--------------|--------------|--------------|
| Total cooling capacity of indoor unit (kW) | 19.6 or less | 28.0 or less | 28.1 to 56.0 | 56.1 or more |
| Model name                                 | UTP-BX090A   | UTP-BX180A   | UTP-BX567A   |              |
| Total cooling capacity of indoor unit (kW) | 28.0 or less | 28.1 to 56.0 | 56.1 or more |              |

### Header

|  |              |              |              |
|--|--------------|--------------|--------------|
| Model name                                 | 3-6 Branches | UTR-H0906L   | UTR-H1806L   |
|  | 3-8 Branches | UTR-H0908L   | UTR-H1808L   |
| Total cooling capacity of indoor unit (kW) |              | 28.0 or less | 28.1 to 56.0 |
| Model name                                 | 3-6 Branches | UTP-J0906A   | UTP-J1806A   |
|  | 3-8 Branches | UTP-J0908A   | UTP-J1808A   |
| Total cooling capacity of indoor unit (kW) |              | 28.0 or less | 28.1 to 56.0 |

### Outdoor unit Branch kit

| Model name             | UTP-CX567A (for V-II/V-III/V-III Tropical) |  | UTP-DX567A (for VR-II) |
|------------------------|--|--|------------------------|
| Number of outdoor unit | 2 outdoor units                            |  | 1                      |
|                        | 3 outdoor units                            |  | 2                      |


### EV Kit

| Model name        | UTR-EV09XB                                |   | UTR-EV14XB               |                            |
|-------------------|---|---|--------------------------|----------------------------|
| Application model | ASYE004GTAH<br>ASYE007GTAH<br>ASYE009GTAH | AGYE004GCAH<br>AGYE007GCAH<br>AGYE009GCAH | ASYE12GACH<br>ASYE14GACH | AGYE012GCAH<br>AGYE014GCAH |

### RB Unit

| Type  | Single type |             |            | Multi type |
|---|-------------|-------------|------------|------------|
| Model name  | UTP-RX01AH  | UTP-RX01BH  | UTP-RX01CH | UTP-RX04BH |
| Power source  | V/Φ/Hz      | 230/ 1 / 50 |            |            |
| Input power   | W           | 17          | 24         | 31         |
| Number of branches  |             | 1           | 1          | 1          |
| Maximum capacity of connectable indoor units (Q)            | kW          | Q ≤ 8.0     | Q ≤ 18.0   | Q ≤ 28.0   |
| Maximum capacity of connectable indoor units per branch (Q) | kW          | Q ≤ 8.0     | Q ≤ 18.0   | Q ≤ 28.0   |
| Maximum number of connectable indoor units per branch       |             | 3           | 8          | 8          |
| Dimensions (H×W×D)  | mm          | 198×298×268 |            |            |
|   |             |             |            |            |
|   |             | 260×658×428 |            |            |

\*1: In case of two RB units connected in series ( total 8-branches ), maximum capacity of connectable indoor units is up to 56.0 kW.

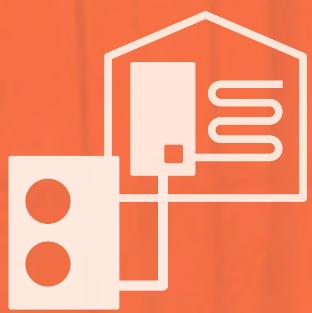

PRODUCT LINEUP

# AIR TO WATER

For RESIDENTIAL

Room Heating & Cooling



Domestic Hot Water



Swimming Pool

## Complete Solution meets various needs

The clean energy produced by WATERSTAGE™ reliably delivers "comfort" to all spaces in the home up to the living room, bedrooms, bath, and swimming pool.


**WATERSTAGE™**



- 240 SOLUTIONS
- 242 CORE TECHNOLOGY
- 243 WATERSTAGE™ Lineup
- 244 Split Type
- Split DHW Integrated Type
- 246 Monobloc Type
- 247 Case Studies
- 248 Optional Parts
- 250 Installation Limitations  
Specifications & Dimensions

### What's a Heat Pump ?

Absorbing free energy from the atmosphere. Heat pump system requires only 1 kWh of electricity to generate 3 to 5 kW thermal energy.

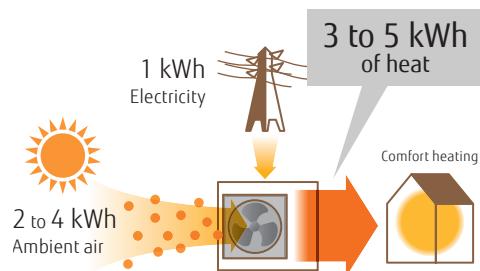



# HOME HEATING


Wide range lineup suited for regional characteristics, family structure, and application. We provide various products to meet your needs from High Power via heating-centered series to reasonably-priced compact series

**WATERSTAGE™**



## High leaving water temperature

High leaving water temperature 60°C kept down to -20°C outdoor temperature without using backup heater.

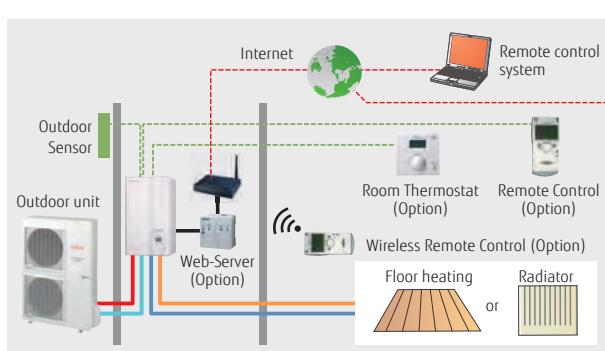

### + DHW Tank


DHW tank (option) can be used to supply hot water by connecting it to the system.

### + Boiler


By combining existing boiler, powerful heating can be performed even at low outdoor temperature.

## Smart control

User's needs are supported by offering a variety of controls, such as individual control and remote control options.



Solar Connection

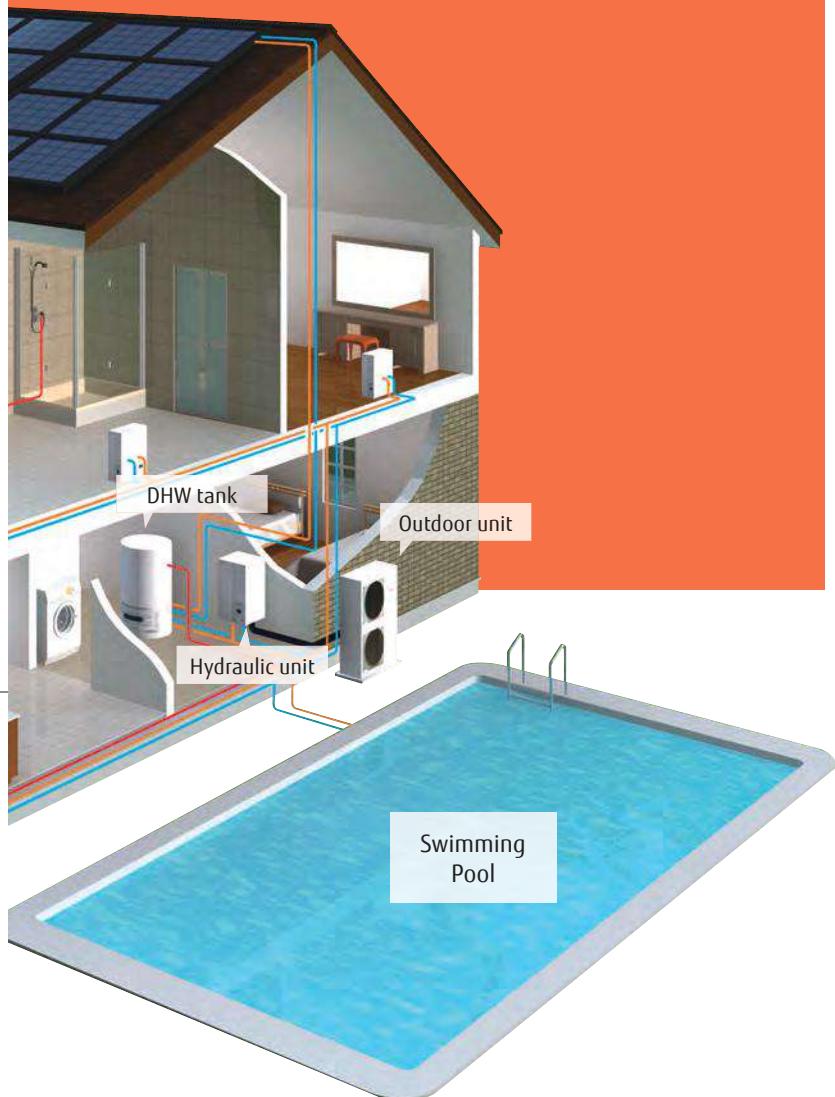

Stylish space saving solution with built-in DHW tank



## Space is saved drastically due to built-in DHW tank.

Existing boiler can be replaced easily. A larger heating capacity can be performed flexibly by using more units in cascade connection.



NEW

## For Room heating & domestic hot water

### Split type Super High Power series

Outdoor unit and hydraulic indoor unit can be installed freely, so installation is easy. Since hydraulic indoor unit is installed inside a house, freezing of circulated water can be prevented. A larger heating capacity can be performed flexibly by using more units in cascade connection.



244 Page

## Appearance-oriented compact outdoor unit

### Split type Comfort series

For Comfort series, optimized flow temperature control is realized by DC inverter technology.

244 Page



### Monobloc type

Outdoor unit and hydraulic indoor unit can be installed anywhere due to compact size. Installation work can be performed easily only by connecting hydraulic pipes. DHW tank can be connected to indoor side.



246 Page

## PRODUCT LINEUP: AIR TO WATER


# CORE TECHNOLOGY

# High Efficiency


### For Outdoor Unit

#### Twin Rotary Compressor with Linear Control Injection Port

It realizes the high condensing temperature without overheating discharge gas temperature by Linear Control Injection process during compression. Therefore, the condensing temperature rises up higher than normal circuit. A higher hot water temperature is realized by controlling the injection amount according to the usage state.

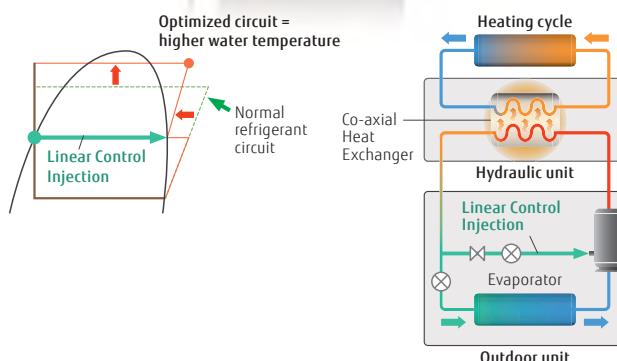

### Accurate temperature control by DC inverter technology

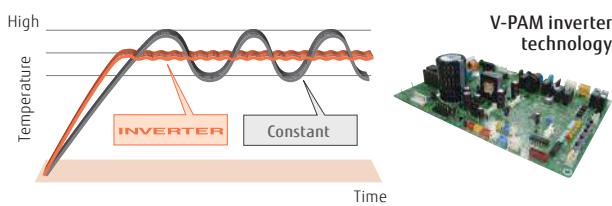


### For Hydraulic Indoor Unit Class A pump

Energy saving pump with constant volume or pressure adjustment function.



### Stainless steel buffer tank

Heat exchange amount is 25% higher than previous model. Energy saving performance is improved.

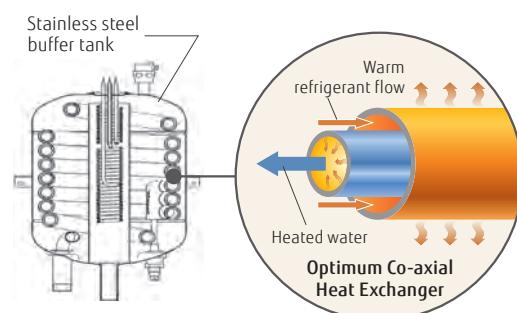

# Easy Control



### Hydraulic Indoor Unit Controller 4 Heating mode

#### 1. Automatic mode

Comfort/Reduce mode switching automatically according to time program

#### 2. Reduce mode

Constant reduce temperature

#### 3. Comfort mode

Constant comfort temperature

#### 4. Protection mode

Stand-by mode with anti-frost protection

## WATERSTAGE™ Lineup

| Capacity (kW)        | 5   | 6                        | 8                        | 10                       | 11                       | 14                       | 15                      | 16                       | 17                      |
|----------------------|---|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------|--------------------------|-------------------------|
| Split                | NEW<br>Super High Power series<br>3 phase<br>Page 244<br><br>Hydraulic Indoor Unit/Outdoor Unit |                          |                          |                          |                          |                          | WSYK170DJ9 / WOYK150LJL |                          | WSYK170DJ9 / WOYK170LJL |
|                      | High Power series<br>Single phase<br>Page 244<br><br>Hydraulic Indoor Unit/Outdoor Unit         |                          |                          |                          | WSYG140DG6 / WOYG112LHT  | WSYG140DG6 / WOYG140LCTA |                         |                          |                         |
|                      | High Power series<br>3 phase<br>Page 244<br><br>Hydraulic Indoor Unit/Outdoor Unit              |                          |                          |                          | WSYK160DG9 / WOYK112LCTA | WSYK160DG9 / WOYK140LCTA |                         | WSYK160DG9 / WOYK160LCTA |                         |
|                      | Comfort series<br>Page 244<br><br>Hydraulic Indoor Unit/Outdoor Unit                            | WSYA050DG6 / WOYA060LFCA | WSYA100DG6 / WOYA060LFCA | WSYA100DG6 / WOYA080LFCA | WSYA100DG6 / WOYA100LFTA |                          |                         |                          |                         |
| Split DHW integrated | High Power series<br>Single phase<br>Page 244<br><br>Hydraulic Indoor Unit/Outdoor Unit         |                          |                          |                          | WGYG140DG6 / WOYG112LHT  | WGYG140DG6 / WOYG140LCTA |                         |                          |                         |
|                      | High Power series<br>3 phase<br>Page 244<br><br>Hydraulic Indoor Unit/Outdoor Unit              |                          |                          |                          | WGKY160DG9 / WOYK112LCTA | WGKY160DG9 / WOYK140LCTA |                         | WGKY160DG9 / WOYK160LCTA |                         |
|                      | Comfort series<br>Page 244<br><br>Hydraulic Indoor Unit/Outdoor Unit                            | WGYA050DG6 / WOYA060LFCA | WGYA100DG6 / WOYA060LFCA | WGYA100DG6 / WOYA080LFCA | WGYA100DG6 / WOYA100LFTA |                          |                         |                          |                         |
|                      | Compact series with hydraulic unit<br>Page 246<br><br>Hydraulic Indoor Unit/Outdoor Unit        | WSYP100DG6 / WPYA050LG   |                          | WSYP100DG6 / WPYA080LG   | WSYP100DG6 / WPYA100LG   |                          |                         |                          |                         |
| Monobloc             |   |                          |                          |                          |                          |                          |                         |                          |                         |

### EHPA Quality Label



Fujitsu General's WATERSTAGE\* have obtained the EHPA Quality Label\*\* by tests according to the international Standards EN14511 and EN17025. The EHPA Quality Label\*\* is a label that shows the end-consumer a quality heat pump unit on the market.

\*: High Power split model


\*\*: Check the validity of label at [www.ehpa.org/QL](http://www.ehpa.org/QL)

### SG-Ready Label



SG-Ready is a defined standard by BWP\*\*\*, which makes it possible that the device can be integrated into a smart grid. Heat pumps, which are equipped with the SG-Ready Label, can receive signals from the power grid (and e.g. also from PV systems) about the available (unused renewable) energy (from wind, sun & water). Fujitsu General provides the SG-Ready compatibility to all new Heat Pumps series.

\*\*\*BWP: the Federal German Heat Pump Association



## PRODUCT LINEUP: AIR TO WATER

### Split Type

Super high power series  
High power series  
Comfort series

**WATERSTAGE™**



#### Super high power series

Hydraulic indoor unit:  
[3phase] WSYK170DJ9  
Outdoor unit:  
[3phase] WOYK150LJL/WOYK170LJL



Hydraulic  
indoor unit  
3 Phase

Outdoor unit  
3 Phase  
15/17 kW

#### High power series

Hydraulic indoor unit:  
WSYG140DG6/[3phase] WSYK160DG9  
Outdoor unit:  
WOYG112LHT/WOYG140LCTA  
[3phase] WOYK112LCTA/WOYK140LCTA/  
WOYK160LCTA



Hydraulic  
indoor unit  
Single Phase/  
3 Phase

Outdoor unit  
Single Phase  
11/14 kW

3 Phase  
11/14/16 kW

#### Comfort series

Hydraulic indoor unit:  
WSYA050DG6/WSYA100DG6  
Outdoor unit:  
WOYA060LFCA/WOYA080LFCA/  
WOYA100LFTA



Hydraulic  
indoor unit  
5/6/8 kW

10 kW

### Split DHW Integrated Type

High power series  
Comfort series

**WATERSTAGE™**



#### High power series

Hydraulic indoor unit:  
WGYG140DG6/[3phase] WGYK160DG9  
Outdoor unit:  
WOYG112LHT/WOYG140LCTA  
[3phase] WOYK112LCTA/WOYK140LCTA/WOYK160LCTA



Hydraulic  
indoor unit  
Single Phase/  
3 Phase

Outdoor unit  
Single Phase  
11/14 kW

3 Phase  
11/14/16 kW

#### Comfort series

Hydraulic indoor unit:  
WGYA050DG6/WGYA100DG6  
Outdoor unit:  
WOYA060LFCA/WOYA080LFCA/WOYA100LFTA



Hydraulic  
indoor unit  
5/6/8 kW

10 kW

## High leaving water temperature

### Super High power series:


High leaving water temperature of 60°C is kept even when outdoor temperature is down to -20°C without using backup heaters. Maximum leaving water temperature is 55°C without backup heater. Hot water supply temperature can be maintained even at -22°C outdoor temperature.



Super high power series

### High power series:

High leaving water temperature of 60°C is kept even when outdoor temperature is down to -20°C without using backup heaters.

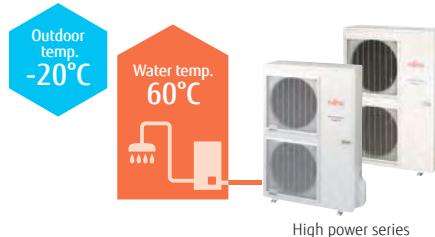

High power series

### Comfort series:

Maximum leaving water temperature is 55°C without backup heater. Hot water supply temperature can be maintained even at -10°C outdoor temperature.



Comfort series

\* If you want to raise the hot water supply temperature, backup heaters can be used for auxiliary operation.


## High COP

Air to water heat pumps work with much more efficiency and save more energy than a traditional heating system.

Energy efficiency class



### Seasonal space heating energy efficiency ( $\eta_s$ )

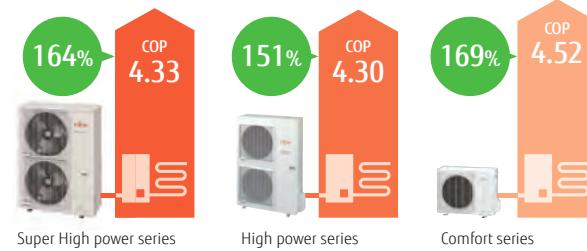


Condition : Outdoor Temp. 7°C Heating Temp. 35°C.

## 2 Zone individual control\*


2 Zone individual control (2 under floor heating zones or under floor heating + radiator zone, etc.)\*


\*: Optional parts are required.

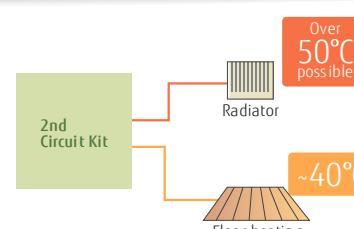

## Automatic heating curve control

Automatic temperature regulation in accordance with heating curve  
(Depends on heating terminal and outdoor temperature)

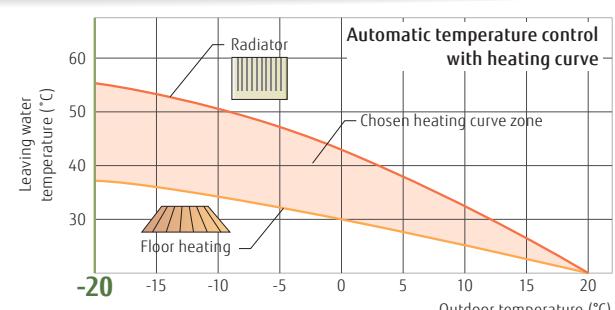



## PRODUCT LINEUP: AIR TO WATER

### Monobloc Type

Comfort series

**WATERSTAGE™**



#### Compact series

Hydraulic indoor unit:

WSYP100DG6

Outdoor unit :

WPYA050LG / WPYA080LG / WPYA100LG



Hydraulic  
indoor unit

Outdoor unit  
5 kW

8/10 kW

#### High leaving water temperature

High leaving water temperature of 55°C keeps to -20°C outdoor temperature without additional heater.



#### High COP


High COP is realized by using a DC twin rotary compressor, inverter technology, and high efficient water heat exchanger.

Energy efficiency class



Condition: Outdoor Temp. 7°C Heating Temp. 35°C.

#### Compact & light weight design

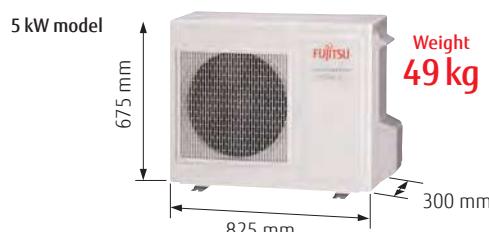

#### Features of the hydraulic indoor unit

- The compact Indoor unit provides two electrical back up heater, each with 3 kW capacity
- 12 L expansion vessel included
- No waste of space. DHW Kit installation inside the hydraulic unit possible.
- New generation controller. Connection by MODBUS protocol possible.
- Integrated heat metering (flow sensor included).




Hydraulic indoor unit

# Case Studies


## Split Type

### 2 emitter simultaneous heating (Individual control)

Floor heating + Radiator

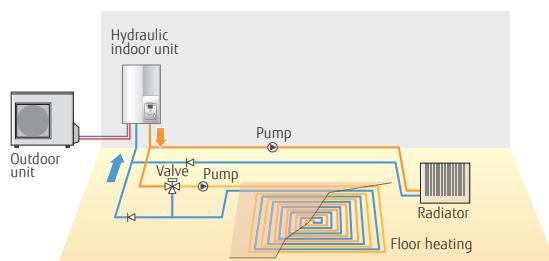


### Boiler connected to heating (Boiler + Heating)

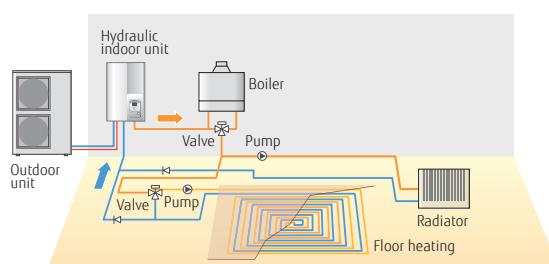


## Split Cascade System

### 2 emitter simultaneous heating (Individual control)

Floor heating + Radiator

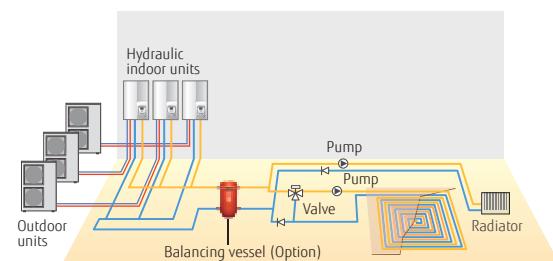


### Boiler connected to heating (Boiler + Heating)

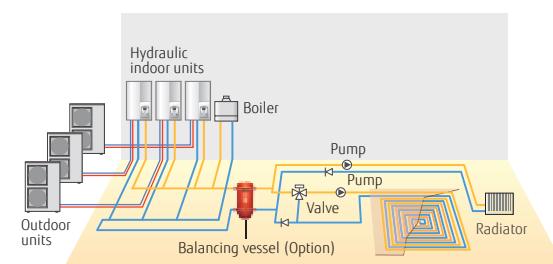

## Split DHW Integrated Type


### Single heating & Domestic Hot Water

Radiator + Domestic Hot Water

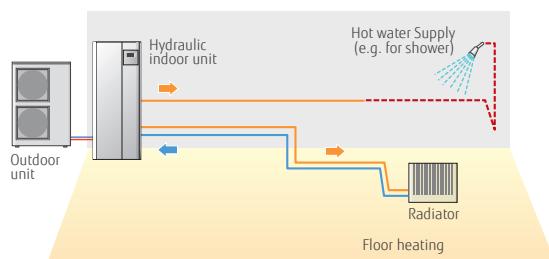

### 2 emitter simultaneous heating (Individual control) & Domestic Hot Water


Radiator + Domestic Hot Water

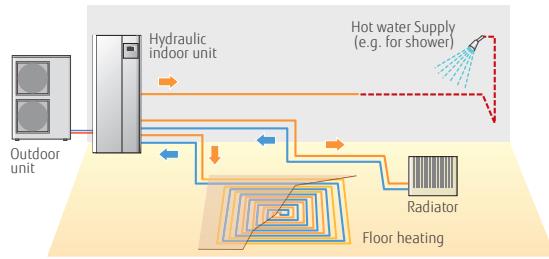

## Monobloc Type


### Single heating system

Floor heating

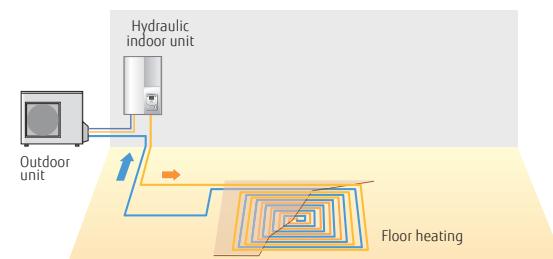

### Boiler connected to heating (Boiler + Heating)

Floor heating

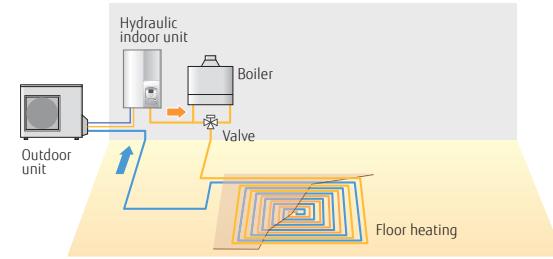

## PRODUCT LINEUP: AIR TO WATER

### Optional Parts

| Product Name                         | Model Name                          | Split                                  |    |            |    |    |    |         |   |   |    | Split DHW integrated type |    |    |         |     |     | Monobloc |     |     |     |     |     |    |     |   |
|--------------------------------------|-------------------------------------|--|----|------------|----|----|----|---------|---|---|----|---------------------------|----|----|---------|-----|-----|----------|-----|-----|-----|-----|-----|----|-----|---|
|                                      |                                     | Super High Power                       |    | High Power |    |    |    | Comfort |   |   |    | High Power                |    |    | Comfort |     |     | Compact  |     |     |     |     |     |    |     |   |
|                                      |                                     | 3Ø                                     | 1Ø | 3Ø         | 1Ø | 1Ø | 1Ø | 5       | 6 | 8 | 10 | 10                        | 10 | 11 | 14      | 16  | 5   | 6        | 8   | 10  | 10  | 10  | 10  | 10 |     |   |
|                                      |                                     | 15                                     | 17 | 11         | 14 | 11 | 14 | 16      | 5 | 6 | 8  | 10                        | 11 | 14 | 16      | 5   | 6   | 8        | 10  | 10  | 10  | 5   | 8   | 10 |     |   |
| 2nd Circuit Kit                      | UTW-KZSXE                           | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | ● | ● | ●  | ●                         | ●  | ●  | ●       | —   | —   | —        | —   | —   | —   | —   | —   | —  |     |   |
|                                      | UTW-KZDXE                           | —                                      | —  | —          | —  | —  | —  | —       | — | — | —  | ●                         | ●  | ●  | ●       | ●   | ●   | ●        | ●   | ●   | ●   | —   | —   | —  |     |   |
| Boiler Connection Kit                | UTW-KBSXD                           | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | ● | ● | ●  | ●                         | ●  | ●  | ●       | —   | —   | —        | —   | —   | —   | —   | —   | —  | —   |   |
|                                      | UTW-KBDXD                           | —                                      | —  | —          | —  | —  | —  | —       | — | — | —  | ●                         | ●  | ●  | ●       | ●   | ●   | ●        | ●   | ●   | ●   | ●   | —   | —  | —   |   |
| Balancing Vessel                     | UTW-TEVXA                           | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | ● | ● | ●  | ●                         | ●  | ●  | ●       | ●   | ●   | ●        | ●   | ●   | ●   | ●   | ●   | ●  | ●   |   |
| DHW Kit                              | UTW-KDWXG (Internal)                | —                                      | —  | —          | —  | —  | —  | —       | — | — | —  | —                         | —  | —  | —       | —   | —   | —        | —   | —   | —   | ●   | ●   | ●  | —   |   |
| DHW Kit                              | UTW-KDWXD (External)                | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | ● | ● | ●  | ●                         | ●  | ●  | ●       | —*1 | —*1 | —*1      | —*1 | —*1 | —*1 | —*1 | —*1 | ●  | ●   | ● |
| DHW Tank                             | 200 Liter<br>300 Liter<br>400 Liter | UTW-T20AXH<br>UTW-T30AXH<br>UTW-T40AXH | ●  | ●          | ●  | ●  | ●  | ●       | ● | ● | ●  | ●                         | ●  | ●  | ●       | —*1 | —*1 | —*1      | —*1 | —*1 | —*1 | —*1 | ●   | ●  | ●   |   |
|                                      | 200 Liter<br>300 Liter<br>400 Liter | UTW-T20BXH<br>UTW-T30BXH<br>UTW-T40BXH | ●  | ●          | ●  | ●  | ●  | ●       | ● | ● | ●  | ●                         | ●  | ●  | ●       | —*1 | —*1 | —*1      | —*1 | —*1 | —*1 | —*1 | ●   | ●  | ●   |   |
| Circulating Pump                     | UTW-PHFXG                           | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | — | — | —  | —                         | ●  | ●  | ●       | ●   | ●   | ●        | ●   | —   | —   | —   | —   | —  | —   |   |
| Swimming Pool Kit                    | UTW-KSPXD                           | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | ● | ● | ●  | ●                         | ●  | ●  | ●       | ●   | ●   | ●        | ●   | ●   | ●   | ●   | ●   | ●  | ●   |   |
| Heat Exchanger for Swimming Pool Kit | UTW-ESPA                            | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | ● | ● | ●  | ●                         | ●  | ●  | ●       | ●   | ●   | ●        | ●   | ●   | ●   | ●   | ●   | ●  | ●   |   |
| Cooling Kit                          | UTW-KCLXD                           | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | ● | ● | ●  | ●                         | ●  | ●  | ●       | ●   | ●   | ●        | ●   | ●   | ●   | ●   | ●   | ●  | —*2 |   |
| Regulation Extension Kit             | UTW-KREXD                           | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | ● | ● | ●  | ●                         | ●  | ●  | ●       | ●   | ●   | ●        | ●   | ●   | ●   | ●   | ●   | ●  | ●   |   |
| Low Noise Kit                        | UTW-KLNXE                           | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | — | — | —  | —                         | ●  | ●  | ●       | ●   | ●   | ●        | ●   | —   | —   | —   | —   | —  | —   |   |
| Drain Pan                            | UTW-KDPXA                           | —                                      | —  | —          | —  | —  | —  | —       | ● | ● | ●  | ●                         | —  | —  | —       | —   | —   | —        | ●   | ●   | ●   | —   | —   | —  | —   |   |
| Cascade Master Kit (incl. LPB Clip)  | UTW-KCMXE                           | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | — | — | —  | ●                         | —  | —  | —       | —   | —   | —        | —   | —   | —   | —   | —   | —  | —   |   |
| Cascade Slave Kit (incl. LPB Clip)   | UTW-KCSXE                           | ●                                      | ●  | ●          | ●  | ●  | ●  | ●       | — | — | —  | ●                         | —  | —  | —       | —   | —   | —        | —   | —   | —   | —   | —   | —  | —   |   |

| Product Name                        | Model Name                | Split            |                 |                 |                 |                 |                 |                 |                 |                 |                 | Split DHW integrated type |                 |                 |                 |                 |                 | Monobloc        |                 |                 |                 |                 |    |
|-------------------------------------|---------------------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|---------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----|
|                                     |                           | Super High Power |                 | High Power      |                 |                 |                 | Comfort         |                 |                 |                 | High Power                |                 |                 | Comfort         |                 |                 | Compact         |                 |                 |                 |                 |    |
|                                     |                           | 3Ø               | 1Ø              | 3Ø              | 1Ø              | 3Ø              | 1Ø              | 5               | 6               | 8               | 10              | 1Ø                        | 3Ø              | 1Ø              | 14              | 16              | 5               | 6               | 8               | 10              | 5               | 8               | 10 |
|                                     |                           | 15               | 17              | 11              | 14              | 11              | 14              | 16              | 5               | 6               | 8               | 10                        | 11              | 14              | 11              | 14              | 16              | 5               | 6               | 8               | 10              | 5               | 8  |
| HMI Kit                             | UTW-KHMXE* <sup>3</sup>   | ●                | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●                         | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●  |
|                                     | UTW-C74TXF* <sup>3</sup>  | ●                | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●                         | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●  |
|                                     | UTW-C74HXF* <sup>3</sup>  | ●                | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●                         | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●  |
|                                     | UTW-C78XD                 | ●                | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●                         | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●  |
| Remote Controller                   | UTW-C78XD-E* <sup>4</sup> | ●                | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●                         | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●  |
|                                     | UTW-C55XA                 | ●                | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●                         | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●  |
|                                     | UTW-C58XD                 | ●                | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●                         | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●  |
|                                     | UTW-MOSXD                 | ●                | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●                         | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●  |
| Room Thermostat                     | UTW-MRCXD                 | ●                | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●                         | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●  |
| Outdoor Sensor Transmitter          | UTW-KW1XD<br>UTW-KW4XD    | ●                | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●                         | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●  |
| RF Modules                          | UTW-KL1XD                 | ●                | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●                         | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●               | ●  |
| Web Server                          | UTW-KMBXE                 | —* <sup>7</sup>  | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup>           | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | —* <sup>7</sup> | ●               | ●               | ●               |    |
| LPB Clip                            | UTW-HAMXE                 | —                | —               | —               | —               | —               | —               | —               | —               | —               | —               | —                         | —               | —               | —               | —               | —               | —               | —               | —               | —               | ●               | ●  |
| MODBUS Clip                         | UTW-HAMXF                 | —                | —               | —               | —               | —               | —               | —               | —               | —               | —               | —                         | —               | —               | —               | —               | —               | —               | —               | —               | —               | ●               | —  |
| Base Heater                         | UTW-KSTXD                 | ●* <sup>5</sup>  | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup>           | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> | ●* <sup>5</sup> |    |
| Service Tool (incl. OCI700 Adaptor) | UTW-KPSXD                 | ●* <sup>6</sup>  | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup>           | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> | ●* <sup>6</sup> |    |
| External Connect Kit                | UTY-XWZXZ2                | ●                | ●               | ●               | ●               | ●               | ●               | ●               | —               | —               | —               | —                         | ●               | ●               | ●               | ●               | —               | —               | —               | —               | —               | —               | —  |

\*1: DHW operation is possible without DHW Kit and DHW Tank.

\*2: Cooling operation is possible without cooling kit

\*3: 19 Languages included, no separate Eastern European RC necessary. C74TXF: Built in Room Temperature sensor C74HXF: Built in Room temperature and Humidity sensor


\*4: Eastern European Language(English, Czech Republic, Slovakia, Poland, Turkey, Hungary, Russia, Slovenia, Greece, Serbia)

\*5: UTW-KL1XD is required for the connection.

\*6: UTW-KW1XD or UTW-KW4XD is required for the connection.

\*7: Additional optional part necessary

● : Available — : Not Available




## PRODUCT LINEUP: AIR TO WATER

# Installation Limitations

### Equipment Installation


#### Split type Hydraulic indoor unit

- Hydraulic indoor unit is to be hang on the wall
- Weight < 65 kg (including water)
- Space for maintenance should be respected

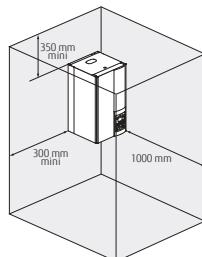


#### Monobloc Type Hydraulic indoor unit

- Hydraulic indoor unit is to be hang on the wall
- Weight < 62 kg (including water)
- Distances for maintenance should be respected

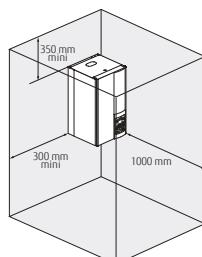


#### Split DHW integrated type Hydraulic indoor unit

- Floor stand
- Weight 366 kg (including water)
- Space for maintenance should be respected.

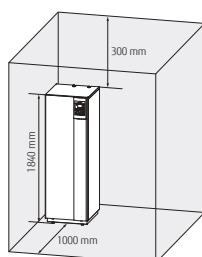

#### Monobloc type Outdoor unit

- Floor stand
- Weight 72 kg (without water): WPYA080LG, WPYA100LG
- Weight 49 kg (without water): WPYA050LG
- Distances for maintenance should be kept

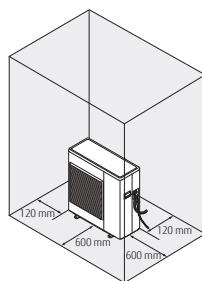

### Piping and Wiring

#### Split type



| Series     | Capacity range(kW) | H (m) | L (m) |
|------------|--------------------|-------|-------|
| Comfort    | 5                  | ±20   | 5-30  |
|            | 6                  |       |       |
|            | 8                  |       |       |
|            | 10                 |       |       |
| High power | 11                 | ±15   | 5-20  |
|            | 14                 |       |       |
|            | 15                 |       | 5-30  |
|            | 16                 |       | 5-20  |
|            | 17                 |       | 5-30  |

\*For the outdoor unit installed below the indoor units: 25 m max. (15, 17 kW models)

# Specifications & Dimensions

#### Split type Super high power series/High power series

#### Specifications


| Model Name   | Hydraulic indoor unit           |        |   |
|--|---------------------------------|--------|---|
|  | Outdoor unit                    |        |   |
| <b>Capacity range</b>                                |                                 |        |   |
| 7°C/35°C floor heating * <sup>1</sup>                | Heating capacity                | kW     |   |
|  | Input power                     |        |   |
|  | COP                             |        |   |
| 2°C/35°C floor heating * <sup>1</sup>                | Heating capacity                | kW     |   |
|  | Input power                     |        |   |
|  | COP                             |        |   |
| -7°C/35°C floor heating* <sup>1</sup>                | Heating capacity                | kW     |   |
|  | Input power                     |        |   |
|  | COP                             |        |   |
| <b>Space heating characteristics*<sup>2</sup></b>    |                                 |        |   |
| Temperature application                              | °C                              |        |   |
| Energy efficiency class                              |                                 |        |   |
| Rated heat output( $P_{rated}$ )                     | kW                              |        |   |
| Seasonal space heating energy efficiency( $\eta_s$ ) | %                               |        |   |
| Annual energy consumption                            | kWh                             |        |   |
| Sound power level                                    | Hydraulic indoor unit           | dB(A)  |   |
|  | Outdoor unit                    |        |   |
| <b>Hydraulic indoor unit Specification</b>           |                                 |        |   |
| Power source   |                                 |        |   |
| Dimensions H×W×D                                     |                                 | mm     |   |
| Weight (Net)   |                                 | kg     |   |
| Water circulation                                    | Min/Max                         | L/min  |   |
| Buffer tank capacity                                 |                                 | L      |   |
| Expansion vessel capacity                            |                                 | L      |   |
| Leaving water temperature range                      | Max                             | °C     |   |
| Water pipe connection diameter                       | Flow/Return                     | mm     |   |
| Backup heater  | Capacity                        | kW     |   |
| <b>Outdoor unit specification</b>                    |                                 |        |   |
| Power source   |                                 |        |   |
| Current  | Max                             | A      |   |
| Dimensions H × W × D                                 |                                 | mm     |   |
| Weight (Net)   |                                 | kg     |   |
| Refrigerant  | Type (Global Warming Potential) |        |   |
|  | Charge                          | kg     |   |
| Additional refrigerant charge amount                 |                                 | g/m    |   |
|  | Diameter                        | Liquid |   |
|  |                                 | Gas    |   |
| Connection pipe                                      | Length                          | mm     |   |
|  | Length(Pre-charge)              | m      |   |
|  | Height difference               | Max    | m |
| Operation range                                      | Heating                         | °C     |   |

\*1:The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.

\*2:All information of ErP can be available for download from [www.fujitsu-general.com/global/products/erp-ecodesign/index.html](http://fujitsu-general.com/global/products/erp-ecodesign/index.html).

#### Dimensions

##### Super high power series Outdoor Unit: WOYG150LJL/WOYG170LJL

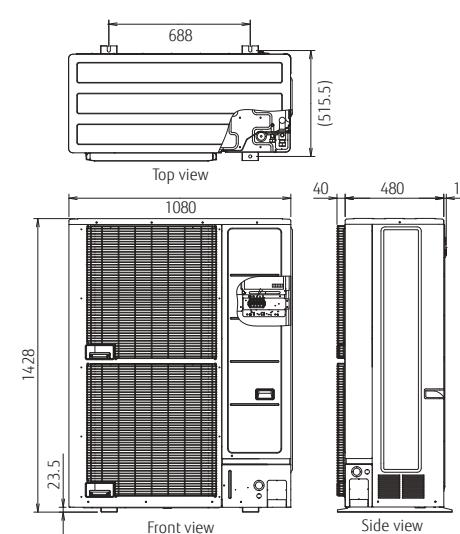

NEW

## Super high power series

|                     |                     |
|---------------------|---------------------|
| WSYK170DJ9          | WSYK170DJ9          |
| WOYK150LJL          | WOYK170LJL          |
| 15                  | 17                  |
| 15.00               | 17.00               |
| 3.46                | 4.13                |
| 4.33                | 4.12                |
| —                   | —                   |
| —                   | —                   |
| —                   | —                   |
| 13.2                | 15.0                |
| 4.55                | 5.32                |
| 2.90                | 2.82                |
| 55                  | 35                  |
| A++                 | A++                 |
| 16                  | 17                  |
| 130                 | 164                 |
| 9849                | 8635                |
| —                   | —                   |
| 68                  | 67                  |
| 3 N 400 V 50 Hz     |                     |
| —                   | —                   |
| —                   | —                   |
| —                   | —                   |
| —                   | —                   |
| —                   | —                   |
| —                   | —                   |
| —                   | —                   |
| —                   | —                   |
| 1,428 × 1,080 × 480 | 1,428 × 1,080 × 480 |
| 138                 | 138                 |
| R410A (2,088)       |                     |
| 3.80                | 3.80                |
| 50                  | 50                  |
| Ø 9.52              | Ø 9.52              |
| Ø 15.88             | Ø 15.88             |
| 5/30                | 5/30                |
| 15                  | 15                  |
| 15                  | 15                  |
| -25 to 35           | -25 to 35           |


## High power series

|                     |                     |                   |                  |
|---------------------|---------------------|-------------------|------------------|
| WSYG140DG6          | WSYG140DG6          | WSYK160DG9        | WSYK160DG9       |
| WOYG112LHT          | WOYG140LCTA         | WOYK112LCTA       | WOYK140LCTA      |
| 11                  | 14                  | 11                | 14               |
| 10.80               | 13.50               | 10.80             | 13.50            |
| 2.54                | 3.23                | 2.51              | 3.20             |
| 4.25                | 4.18                | 4.30              | 4.22             |
| 10.77               | 12.00               | 10.77             | 13.00            |
| 3.44                | 3.87                | 3.40              | 4.15             |
| 3.13                | 3.10                | 3.17              | 3.13             |
| 10.38               | 11.54               | 10.38             | 12.20            |
| 4.32                | 5.08                | 4.28              | 5.13             |
| 2.40                | 2.27                | 2.43              | 2.38             |
| 55                  | 35                  | 55                | 35               |
| A+                  | A++                 | A+                | A++              |
| 9                   | 11                  | 11                | 13               |
| 112                 | 151                 | 113               | 148              |
| 6704                | 6062                | 8041              | 6824             |
| —                   | —                   | 46                | 46               |
| 68                  | 67                  | 68                | 68               |
| 3 N 400 V 50 Hz     |                     |                   |                  |
| —                   | —                   | 800 × 450 × 457   | 800 × 450 × 457  |
| —                   | —                   | 42                | 42               |
| —                   | —                   | 19.5/39.0         | 19.5/39.0        |
| —                   | —                   | 24.4/48.7         | 24.4/48.7        |
| —                   | —                   | 16                | 16               |
| —                   | —                   | 8                 | 8                |
| —                   | —                   | 60                | 60               |
| —                   | —                   | Ø 25.4/Ø 25.4     | Ø 25.4/Ø 25.4    |
| —                   | —                   | 6.0(3.0kW×2pcs.)  | 9.0(3.0kW×3pcs.) |
| 3 N 400 V 50 Hz     |                     |                   |                  |
| —                   | —                   | 22.0              | 25.0             |
| 1,428 × 1,080 × 480 | 1,428 × 1,080 × 480 | 1,290 × 900 × 330 | 99               |
| 138                 | 138                 | 92                | 99               |
| R410A (2,088)       |                     | R410A (2,088)     |                  |
| 3.80                | 3.80                | 2.50              |                  |
| 50                  | 50                  | 50                |                  |
| Ø 9.52              | Ø 9.52              | Ø 9.52            |                  |
| Ø 15.88             | Ø 15.88             | Ø 15.88           |                  |
| 5/30                | 5/30                | 5/20              |                  |
| 15                  | 15                  | 15                |                  |
| 15                  | 15                  | 15                |                  |
| -25 to 35           | -25 to 35           | -25 to 35         |                  |


## High power series

## Outdoor Unit:

WOYG112LHT/WOYG140LCTA

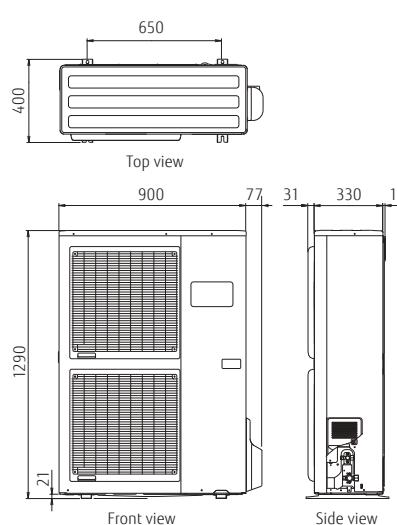


## WOYG112LHT/WOYG140LCTA

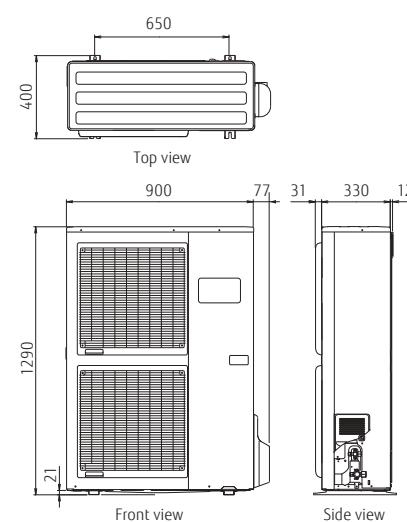

## Hydraulic Indoor Unit:

WSYK170DJ9 (Super high power series)

WSYG140DG6/WSYK160DG9 (High power series)

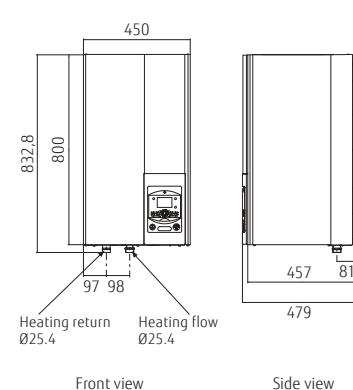

## PRODUCT LINEUP: AIR TO WATER

# Specifications & Dimensions

Split type Comfort series

### Specifications

| Model Name   | Hydraulic indoor unit           | WSYA050DG6  | WSYA100DG6      | WSYA100DG6  | WSYA100DG6       |
|--|---------------------------------|-------------|-----------------|-------------|------------------|
| Outdoor unit   | WOYA060LFCA                     | WOYA060LFCA | WOYA080LFCA     | WOYA080LFCA | WOYA100LFTA      |
| <b>Capacity range</b>                                  |                                 | 5           | 6               | 8           | 10               |
| 7°C/35°C floor heating * <sup>1</sup>                  | Heating capacity kW             | 4.50        | 6.00            | 7.50        | 10.00            |
|  | Input power                     | 0.996       | 1.41            | 1.84        | 2.49             |
|  | COP                             | 4.52        | 4.27            | 4.08        | 4.02             |
| 2°C/35°C floor heating * <sup>1</sup>                  | Heating capacity kW             | 4.50        | 4.95            | 5.65        | 7.70             |
|  | Input power                     | 1.39        | 1.53            | 1.78        | 2.47             |
|  | COP                             | 3.24        | 3.24            | 3.17        | 3.12             |
| -7°C/35°C floor heating* <sup>1</sup>                  | Heating capacity kW             | 4.10        | 4.60            | 5.70        | 7.40             |
|  | Input power                     | 1.47        | 1.74            | 2.23        | 2.97             |
|  | COP                             | 2.79        | 2.64            | 2.56        | 2.49             |
| <b>Space heating characteristics*<sup>2</sup></b>      |                                 |             |                 |             |                  |
| Temperature application °C                             |                                 | 55          | 35              | 55          | 35               |
| Energy efficiency class                                |                                 | A+          | A++             | A+          | A++              |
| Rated heat output( $P_{rated}$ ) kW                    |                                 | 4           | 4               | 5           | 6                |
| Seasonal space heating energy efficiency( $\eta_s$ ) % |                                 | 115         | 169             | 115         | 169              |
| Annual energy consumption kWh                          |                                 | 3026        | 2160            | 3180        | 2505             |
| Sound power level                                      | Hydraulic indoor unit dB(A)     | 46          | 46              | 46          | 46               |
|  | Outdoor unit                    | 65          | 60              | 65          | 69               |
|  |                                 | 65          | 63              | 65          | 68               |
|  |                                 | 65          | 69              | 68          | 69               |
| <b>Hydraulic indoor unit Specification</b>             |                                 |             |                 |             |                  |
| Power source   |                                 |             |                 |             | 1 Ø 230 V 50 Hz  |
| Dimensions H×W×D                                       | mm                              |             |                 |             | 800 × 450 × 457  |
| Weight (Net)   | kg                              |             |                 |             | 42               |
| Water circulation                                      | Min/Max L/min                   | 8.1/16.2    | 10.8/21.7       | 13.5/27.1   | 18.1/36.1        |
| Buffer tank capacity                                   | L                               |             |                 |             | 16               |
| Expansion vessel capacity                              | L                               |             |                 |             | 8                |
| Leaving water temperature range                        | Max °C                          |             |                 |             | 55               |
| Water pipe connection diameter                         | Flow/Return mm                  |             |                 |             | Ø 25.4/Ø 25.4    |
| Backup heater  | Capacity kW                     |             |                 |             | 6.0(3.0kW×2pcs.) |
| <b>Outdoor unit specification</b>                      |                                 |             |                 |             |                  |
| Power source   |                                 |             |                 |             | 1 Ø 230 V 50 Hz  |
| Current  | Max A                           | 11.0        | 12.5            | 17.5        | 18.5             |
| Dimensions H × W × D                                   | mm                              |             | 620 × 790 × 290 |             | 830 × 900 × 330  |
| Weight (Net)   | kg                              | 41          |                 | 42          | 90               |
| Refrigerant  | Type (Global Warming Potential) |             | R410A (2,088)   |             |                  |
|  | Charge kg                       | 1.10        |                 | 1.40        | 1.80             |
| Additional refrigerant charge amount                   | g/m                             | 25          |                 | 40          | Ø 9.52           |
| Connection pipe  | Diameter Liquid mm              |             | Ø 6.35          |             | Ø 15.88          |
|  | Gas mm                          | Ø 12.7      |                 |             |                  |
| Length   | Min/Max m                       |             |                 | 5/30        |                  |
| Length(Pre-charge)                                     | m                               |             |                 | 15          |                  |
| Height difference                                      | Max m                           |             |                 | 20          |                  |
| Operation range  | Heating °C                      |             |                 | -20 to 35   |                  |


\*<sup>1</sup>The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.

\*<sup>2</sup>All information of ErP can be available for downloaded from [www.fujitsu-general.com/global/products/erp-ecodesign/index.html](http://www.fujitsu-general.com/global/products/erp-ecodesign/index.html).


### Dimensions

#### Outdoor Unit:

WOYA060LFCA/WOYA080LFCA

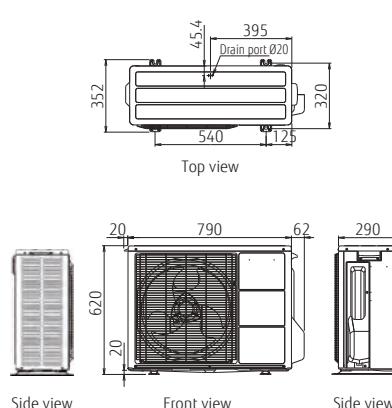


WOYA100LFTA

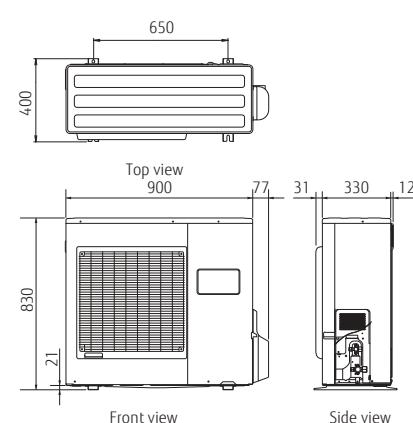

#### Hydraulic Indoor Unit:

WSYA050DG6/WSYA100DG6

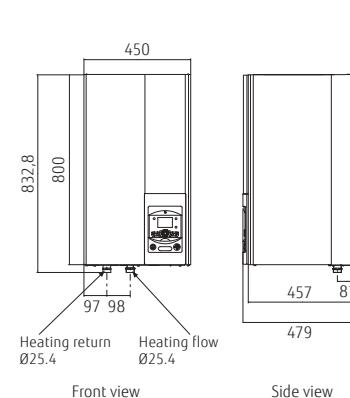

## Split DHW Integrated type High power series

### Specifications


| Model Name   | Hydraulic indoor unit                  | WGYG140DG6         | WGYG140DG6                  | WGYK160DG9                  | WGYK160DG9                  | WGYK160DG9                  |
|--|--|--------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
|  | Outdoor unit                           | WOYG112LHT         | WOYG140LCTA                 | WOYK12LCTA                  | WOYK140LCTA                 | WOYK160LCTA                 |
| <b>Capacity range</b>                                  |  | 11                 | 14                          | 11                          | 14                          | 16                          |
| 7°C/35°C floor heating * <sup>1</sup>                  | Heating capacity<br>Input power<br>COP | kW<br>2.54<br>4.25 | kW<br>10.80<br>3.23<br>4.18 | kW<br>13.50<br>2.51<br>4.30 | kW<br>10.80<br>3.20<br>4.22 | kW<br>13.50<br>3.70<br>4.10 |
| 2°C/35°C floor heating * <sup>1</sup>                  | Heating capacity<br>Input power<br>COP | kW<br>3.44<br>3.13 | kW<br>10.77<br>3.87<br>3.10 | kW<br>12.00<br>3.40<br>3.17 | kW<br>10.77<br>4.15<br>3.13 | kW<br>13.00<br>4.34<br>3.11 |
| -7°C/35°C floor heating * <sup>1</sup>                 | Heating capacity<br>Input power<br>COP | kW<br>4.32<br>2.40 | kW<br>10.38<br>5.08<br>2.27 | kW<br>11.54<br>4.28<br>2.43 | kW<br>10.38<br>5.13<br>2.38 | kW<br>12.20<br>5.40<br>2.50 |
| <b>Space heating characteristics*<sup>2</sup></b>      |  |                    |                             |                             |                             |                             |
| Temperature application                                | °C                                     | 55<br>35           | 55<br>35                    | 55<br>35                    | 55<br>35                    | 55<br>35                    |
| Energy efficiency class                                |  | A+<br>A++          | A+<br>A+                    | A+<br>A++                   | A+<br>A++                   | A+<br>A+                    |
| Rated heat output( $P_{rated}$ )                       | kW                                     | 9<br>11            | 11<br>13                    | 9<br>11                     | 11<br>13                    | 13<br>14                    |
| Seasonal space heating energy efficiency( $\eta_s$ )   | %                                      | 112<br>151         | 151<br>113                  | 113<br>148                  | 112<br>154                  | 117<br>150                  |
| Annual energy consumption                              | kWh                                    | 6704<br>6062       | 6062<br>8041                | 8041<br>6824                | 6824<br>6669                | 6669<br>5930                |
| Sound power level                                      | Hydraulic indoor unit<br>Outdoor unit  | dB(A)<br>46<br>68  | dB(A)<br>46<br>69           | dB(A)<br>46<br>69           | dB(A)<br>46<br>70           | dB(A)<br>46<br>68           |
| <b>Domestic hot water characteristics*<sup>2</sup></b> |  |                    |                             |                             |                             |                             |
| Load profile   |  | L                  |                             |                             |                             |                             |
| Energy efficiency class                                |  | A                  |                             |                             |                             |                             |
| Energy efficiency( $\eta_{dh}$ )                       | %                                      | 88                 |                             |                             |                             |                             |
| Annual electricity consumption                         | kWh                                    | 1166               |                             |                             |                             |                             |
| <b>Hydraulic indoor unit Specification</b>             |  |                    |                             |                             |                             |                             |
| Power source   |  | 1 0 230 V 50 Hz    |                             |                             | 3 N 400 V 50 Hz             |                             |
| Dimensions H×W×D                                       | mm                                     |                    |                             | 1,840×648×698               |                             |                             |
| Weight (Net)   | kg                                     |                    |                             | 152                         |                             |                             |
| Water circulation                                      | L/min                                  | 19.5/39.0          | 24.4/28.7                   | 19.5/39.0                   | 24.4/48.7                   | 27.4/54.8                   |
| DHW capacity   | L                                      |                    |                             | 190                         |                             |                             |
| Hot water heater capacity                              | kW                                     |                    |                             | 1.5                         |                             |                             |
| Expansion vessel capacity                              | L                                      |                    |                             | 12                          |                             |                             |
| Leaving water temperature range                        | Max °C                                 |                    |                             | 60                          |                             |                             |
| Water pipe connection diameter                         | Flow/Return mm                         |                    |                             | Ø 25.4/Ø 25.4               |                             |                             |
| Hot water pipe connection diameter                     | mm                                     |                    |                             | Ø 19.05                     |                             |                             |
| Backup heater  | Capacity kW                            | 6.0(3.0kW×2pcs.)   |                             |                             | 9.0(3.0kW×3pcs.)            |                             |
| <b>Outdoor unit specification</b>                      |  |                    |                             |                             |                             |                             |
| Power source   |  | 1 0 230 V 50 Hz    |                             |                             | 3 N 400 V 50 Hz             |                             |
| Current  | Max A                                  | 22.0               | 25.0                        | 8.5                         | 9.5                         | 10.5                        |
| Dimensions H × W × D                                   | mm                                     |                    |                             | 1,290 × 900 × 330           |                             |                             |
| Weight (Net)   | kg                                     | 92                 |                             | 99                          |                             |                             |
| Refrigerant  | Type (Global Warming Potential)        |                    |                             | R410A (2,088)               |                             |                             |
|  | Charge kg                              |                    |                             | 2.50                        |                             |                             |
| Additional refrigerant charge amount                   | g/m                                    |                    |                             | 50                          |                             |                             |
| Connection pipe  | Diameter Liquid mm                     |                    |                             | Ø 9.52                      |                             |                             |
|  | Gas mm                                 |                    |                             | Ø 15.88                     |                             |                             |
| Length   | Min/Max m                              |                    |                             | 5/20                        |                             |                             |
| Length(Pre-charge)                                     | m                                      |                    |                             | 15                          |                             |                             |
| Height difference                                      | Max m                                  |                    |                             | 15                          |                             |                             |
| Operation range  | Heating °C                             |                    |                             | -25 to 35                   |                             |                             |

\*1:The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.


\*2:All information of ErP can be available for downloaded from [www.fujitsu-general.com/global/products/erp-ecodesign/index.html](http://www.fujitsu-general.com/global/products/erp-ecodesign/index.html).

### Dimensions


#### Outdoor Unit: WOYG112LHT/WOYG140LCTA

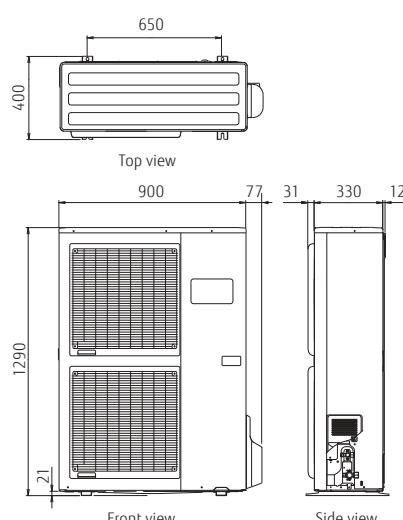

#### WOYK112LCTA/WOYK140LCTA/WOYK160LCTA

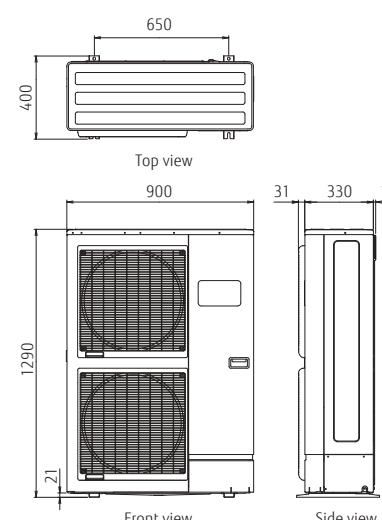

#### Hydraulic Indoor Unit: WGYG140DG6/WGYK160DG9

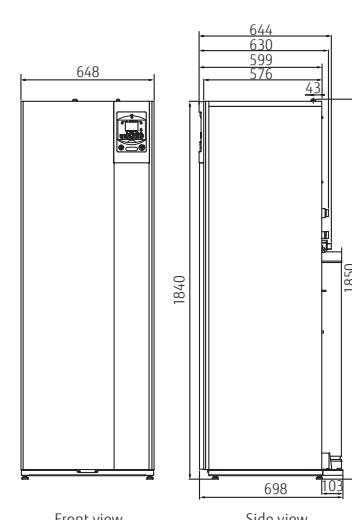

## PRODUCT LINEUP: AIR TO WATER

# Specifications & Dimensions

### Split DHW Integrated type Comfort series

#### Specifications: Split DHW Integrated type Comfort series

| Model Name   | Hydraulic indoor unit           | WOYA050DG6      | WOYA100DG6       | WOYA100DG6  | WOYA100DG6      |
|--|---------------------------------|-----------------|------------------|-------------|-----------------|
| Capacity range   | Outdoor unit                    | WOYA060LFCA     | WOYA060LFCA      | WOYA080LFCA | WOYA100LFTA     |
| 7°C/35°C floor heating * <sup>1</sup>                  | Heating capacity kW             | 4.50            | 6.00             | 7.50        | 10.00           |
|  | Input power                     | 0.996           | 1.41             | 1.84        | 2.49            |
|  | COP                             | 4.52            | 4.27             | 4.08        | 4.02            |
| 2°C/35°C floor heating * <sup>1</sup>                  | Heating capacity kW             | 4.50            | 4.95             | 5.65        | 7.70            |
|  | Input power                     | 1.39            | 1.53             | 1.78        | 2.47            |
|  | COP                             | 3.24            | 3.24             | 3.17        | 3.12            |
| -7°C/35°C floor heating* <sup>1</sup>                  | Heating capacity kW             | 4.10            | 4.60             | 5.70        | 7.40            |
|  | Input power                     | 1.47            | 1.74             | 2.23        | 2.97            |
|  | COP                             | 2.79            | 2.64             | 2.56        | 2.49            |
| <b>Space heating characteristics*<sup>2</sup></b>      |                                 |                 |                  |             |                 |
| Temperature application °C                             |                                 | 55              | 35               | 55          | 35              |
| Energy efficiency class                                |                                 | A+              | A++              | A+          | A++             |
| Rated heat output( $P_{rated}$ ) kW                    |                                 | 4               | 4                | 5           | 6               |
| Seasonal space heating energy efficiency( $\eta_s$ ) % |                                 | 115             | 169              | 115         | 169             |
| Annual energy consumption kWh                          |                                 | 3026            | 2160             | 3180        | 2505            |
| Sound power level                                      | Hydraulic indoor unit           | 46              | 46               | 46          | 46              |
|  | Outdoor unit                    | 65              | 60               | 65          | 69              |
| <b>Domestic hot water characteristics*<sup>2</sup></b> |                                 |                 |                  |             |                 |
| Load profile   |                                 | L               |                  |             |                 |
| Energy efficiency class                                |                                 | A+              |                  |             |                 |
| Energy efficiency(ηwh) %                               |                                 | 120             |                  |             |                 |
| Annual electricity consumption kWh                     |                                 | 880             |                  |             |                 |
| <b>Hydraulic indoor unit Specification</b>             |                                 |                 |                  |             |                 |
| Power source   |                                 | 1 Ø 230 V 50 Hz |                  |             |                 |
| Dimensions H×W×D                                       | mm                              | 1,840×648×698   |                  |             |                 |
| Weight (Net)   | kg                              | 152             |                  |             |                 |
| Water circulation                                      | L/min                           | 8.1/16.2        | 10.8/21.7        | 13.5/27.1   | 18.1/36.1       |
| DHW capacity   | L                               |                 | 190              |             |                 |
| Hot water heater capacity                              | kW                              |                 | 1.5              |             |                 |
| Expansion vessel capacity                              | L                               |                 | 12               |             |                 |
| Leaving water temperature range                        | Max °C                          |                 | 55               |             |                 |
| Water pipe connection diameter                         | Flow/Return mm                  |                 | Ø 25.4/Ø 25.4    |             |                 |
| Hot water pipe connection diameter                     | mm                              |                 | Ø 19.05          |             |                 |
| Backup heater  | Capacity kW                     |                 | 6.0(3.0kW×2pcs.) |             |                 |
| <b>Outdoor unit specification</b>                      |                                 |                 |                  |             |                 |
| Power source   |                                 | 1 Ø 230 V 50 Hz |                  |             |                 |
| Current  | Max A                           | 11.0            | 12.5             | 17.5        | 18.5            |
| Dimensions H × W × D                                   | mm                              | 620 × 790 × 290 |                  |             | 830 × 900 × 330 |
| Weight (Net)   | kg                              | 41              | 42               |             | 60              |
| Refrigerant  | Type (Global Warming Potential) |                 | R410A (2,088)    |             |                 |
|  | Charge kg                       | 1.10            |                  | 1.40        | 1.80            |
| Additional refrigerant charge amount                   | g/m                             | 25              |                  |             | 40              |
|  | Diameter Liquid mm              | Ø 6.35          |                  |             | Ø 9.52          |
| Connection pipe  | Gas                             |                 |                  | Ø 12.70     | Ø 15.88         |
| Length   | Min/Max m                       |                 |                  | 5/30        |                 |
| Length(Pre-charge)                                     | m                               |                 |                  | 15          |                 |
| Height difference                                      | Max m                           |                 |                  | 20          |                 |
| Operation range  | Heating °C                      |                 |                  | -20 to 35   |                 |


\*1:The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.

\*2:All information of ErP can be available for downloaded from [www.fujitsu-general.com/global/products/erp-ecodesign/index.html](http://www.fujitsu-general.com/global/products/erp-ecodesign/index.html).


#### Dimensions

##### Outdoor Unit:

WOYA060LFCA/WOYA080LFCA

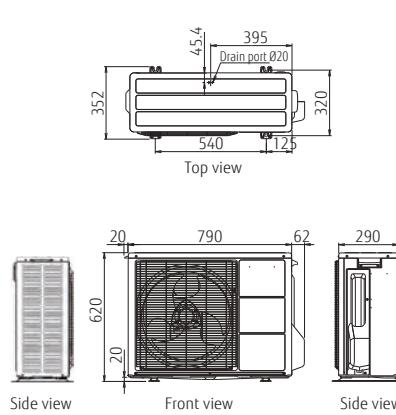


WOYA100LFTA

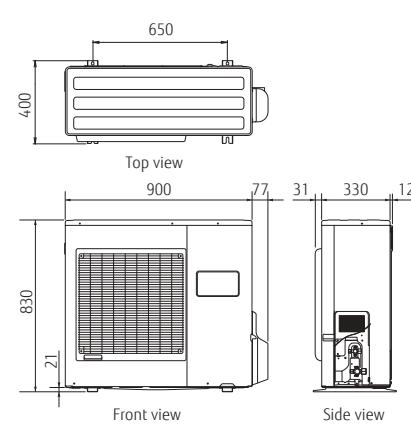

##### Hydraulic Indoor Unit:

WOYA050DG6/WOYA100DG6

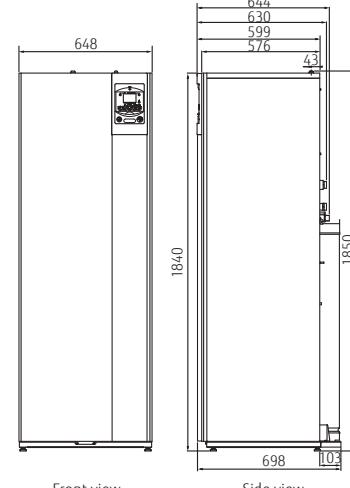

## Monobloc type

### Specifications


| Model Name   | Hydraulic indoor unit                  |                            | WSYP100DG6                 |                             |      |
|--|--|----------------------------|----------------------------|-----------------------------|------|
|  | Outdoor unit                           | WPYA050LG                  | WPYA080LG                  | WPYA100LG                   |      |
| <b>Capacity range</b>                                |  | 5                          | 8                          | 10                          |      |
| 7°C/35°C floor heating * <sup>1</sup>                | Heating capacity<br>Input power<br>COP | kW<br>5.00<br>1.19<br>4.20 | kW<br>8.00<br>1.78<br>4.50 | kW<br>10.00<br>2.30<br>4.35 |      |
| 2°C/35°C floor heating * <sup>1</sup>                | Heating capacity<br>Input power<br>COP | kW<br>3.65<br>1.07<br>3.40 | kW<br>4.35<br>1.23<br>3.55 | kW<br>4.90<br>1.44<br>3.40  |      |
| -7°C/35°C floor heating* <sup>1</sup>                | Heating capacity<br>Input power<br>COP | kW<br>3.55<br>1.38<br>2.57 | kW<br>7.10<br>2.93<br>2.42 | kW<br>8.00<br>3.32<br>2.41  |      |
| <b>Space heating characteristics*<sup>2</sup></b>    |  |                            |                            |                             |      |
| Temperature application                              | °C                                     | 55<br>35                   | 55<br>35                   | 55<br>35                    |      |
| Energy efficiency class                              |  | A+<br>A++                  | A+<br>A++                  | A+<br>A++                   |      |
| Rated heat output( $P_{rated}$ )                     | kW                                     | 4<br>4                     | 6<br>7                     | 7<br>8                      |      |
| Seasonal space heating energy efficiency( $\eta_s$ ) | %                                      | 118<br>171                 | 123<br>168                 | 118<br>167                  |      |
| Annual energy consumption                            | kWh                                    | 3055<br>1952               | 3828<br>3580               | 4491<br>3700                |      |
| Sound power level                                    | Outdoor unit                           | dB (A)                     | 62<br>61                   | 65                          | 68   |
| <b>Hydraulic indoor unit Specification</b>           |  |                            |                            |                             |      |
| Power source   |  |                            | 1 Ø 230 V 50 Hz            |                             |      |
| Dimensions H×W×D                                     | mm                                     |                            | 803 × 450 × 457            |                             |      |
| Weight (Net)   | kg                                     |                            | 40                         |                             |      |
| Buffer tank capacity                                 | L                                      |                            | 22                         |                             |      |
| Expansion vessel capacity                            | L                                      |                            | 12                         |                             |      |
| Water pipe connection diameter                       | Flow/Return                            | mm                         | Ø 25.4/Ø 25.4              |                             |      |
| Backup heater  | Capacity                               | kW                         | 6.0 (3.0 kW×2pcs.)         |                             |      |
| <b>Outdoor unit specification</b>                    |  |                            |                            |                             |      |
| Power source   |  |                            | 1 Ø 230 V 50 Hz            |                             |      |
| Dimensions H × W × D                                 | mm                                     | 675 × 825 × 300            | 882 × 850 × 330            |                             |      |
| Weight (Net)   | kg                                     | 49                         | 72                         |                             |      |
| Current  | Max                                    | A                          | 10.9                       | 15.2                        | 17.5 |
| Water circulation                                    | Min/Max                                | L/min                      | 5.0/20.0                   | 10.0/30.0                   |      |
| Water pipe connection diameter                       | Flow/Return                            | mm                         | Ø 19.05/Ø 19.05            | Ø 25.4/Ø 25.4               |      |
| Refrigerant  | Type (Global Warming Potential)        |                            | R410A (2,088)              |                             |      |
| Charge   | kg                                     | 1.05                       | 1.72                       |                             |      |
| Leaving water temperature range                      | Max                                    | °C                         | 55                         |                             |      |
| Operation range                                      | Heating                                | °C                         | -20 to 35                  |                             |      |

\*1: The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.


\*2: All information of ErP can be available for download from [www.fujitsu-general.com/global/products/erp-ecodesign/index.html](http://www.fujitsu-general.com/global/products/erp-ecodesign/index.html).

### Dimensions


**Outdoor Unit:**  
WPYA050LG

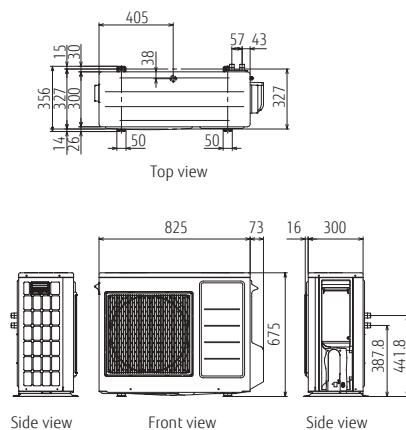

WPYA080LG/WPYA100LG

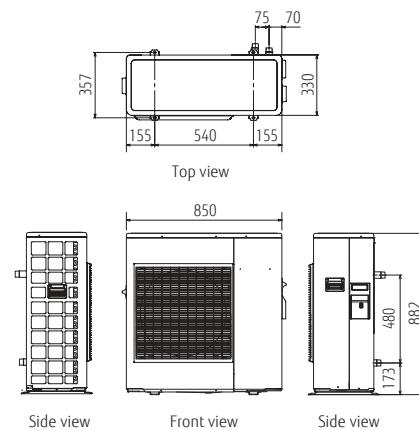

**Hydraulic Indoor Unit:**  
WSYP100DG6

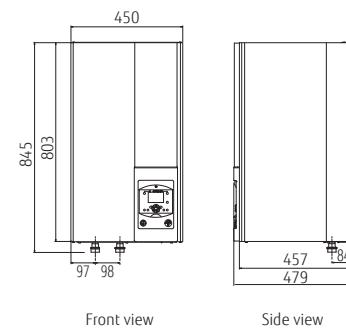

# SUPPORT

Our know-how supports you not only during the product release but also from guiding implementation to product maintenance.

| Category                   | Tool                | Mobile Technician | Service Tool / Web Monitoring Tool | CFD Simulation | WATERSTAGE™ proposer | Design Simulator (RAC, PAC, VRF) | WATERSTAGE™ Package label creator |
|----------------------------|---------------------|-------------------|------------------------------------|----------------|----------------------|----------------------------------|-----------------------------------|
|                            | Service Manual      |                   |                                    |                |                      |                                  |                                   |
|                            | Installation Manual |                   |                                    |                |                      |                                  |                                   |
| Product Training           | ●                   |                   |                                    |                |                      |                                  |                                   |
| Product Information Seek   |                     | ●                 | ●                                  | ●              |                      |                                  |                                   |
| Technical Information Seek |                     |                   |                                    | ●              | ●                    |                                  |                                   |
| Model Selection            |                     |                   |                                    | ●              |                      |                                  | ●                                 |
| Design                     |                     |                   |                                    | ●              |                      |                                  | ●                                 |
| Verification               |                     |                   |                                    |                |                      |                                  | ●                                 |
| Installation               |                     |                   |                                    | ●              |                      |                                  | ●                                 |
| After sales and Service    |                     |                   |                                    |                |                      |                                  | ●                                 |

- 258 AIRSTAGE™ SUPPORT
- 260 AIRSTAGE™/RAC SUPPORT TOOL
- 262 WATERSTAGE™ SUPPORT TOOL
- 264 QUICK SERVICE & MAINTENANCE
- 266 SERVICE TOOL
- 267 WEB MONITORING TOOL

## SUPPORT

# AIRSTAGE™ SUPPORT

Fujitsu General provides a variety of product and technical information to engineers and consultants, and also conducts new product research and design support activities. We provide a wide range of support to maintain high quality from design to installation.



## Training

Fujitsu General has many training facilities around the world that regularly conduct specialized product, technical, and service training. These research facilities also support the development of people with high technical capability.

### Features

- Designing AIRSTAGE™ Systems
- Control System on-site training

- 1 Head Office Training Center: Japan
- 2 China Training Center: China
- 3 Asia Training Center: Singapore
- 4 Europe Training Center: U.K.
- 5 Europe Training Center: Germany
- 6 America Training Center: U.S.A.
- 7 Middle East Training Center: UAE
- 8 Oceania Training Center: Australia



## Technical information

We provide information and tools that are useful for air conditioning system design, such as unit performance data and tools that make model selection and estimation easy.

### Features

- Design & Technical Manual
- Model Selection & Estimation
- Certificate Data
- 2D/3D CAD Data



## Product information

New product information is provided in the form of documents and movies for every new model released. These can be downloaded from a private section of our website. To access this website, please contact your Fujitsu representative.

### Features

- Product News
- Brochures & All Manuals
- Feature Promotion Movie




## Technical support

Technical support is provided at every stage from design to installation to assist in providing the most suitable air conditioning solution.

### Features

- CFD Simulation
- Guide line
- Commissioning Support

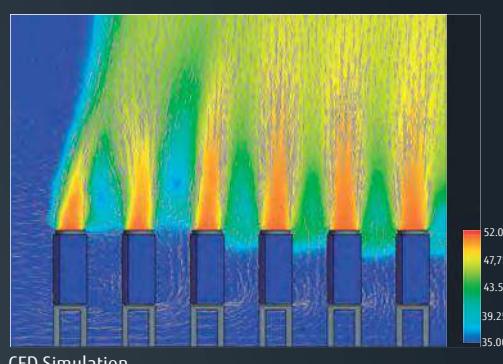

Commissioning Support

## SUPPORT

# AIRSTAGE™/RAC SUPPORT TOOL


Put the charts and pens away and design your projects on your computer with ease using the Design Simulator. Everything from selecting indoor and outdoor units, allocating controls and optional parts to designing the piping and wiring systems is made easier using the program's built-in features.

Once your project is designed take advantage of the Export functions to easily get materials lists, product specifications, refrigerant calculations and more - it'll even export to Word, Excel, or Acrobat formats, and group the relevant CAD data for your project.

## Design Simulator

### Automatically create model selection information


- Each unit can be automatically set by entering the required performance, type, and temperature conditions for each indoor unit and then dragging and dropping into the outdoor unit.
- Piping and wiring diagrams can be created automatically and it is easy to set branches, grouping, and options.
- The additional refrigerant charging amount is automatically calculated when the pipe length is entered.
- It is also easy to set the remote controller groups, central controller and converters.
- The equipment list including the equipment information is created automatically.

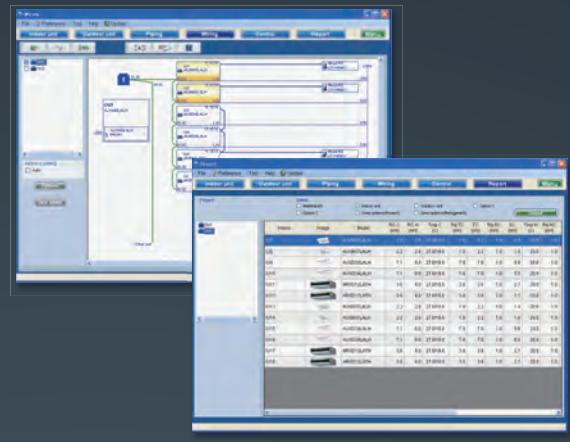

### Output the format that matches the application

The information specific to your project can be exported in a number of industry standard file formats.

- Word format (rtf)(doc)
- Excel format (csv)
- Acrobat format (pdf)
- Auto CAD format (DXF)
- 2D Data (DXF)
- 3D Data (RFA)

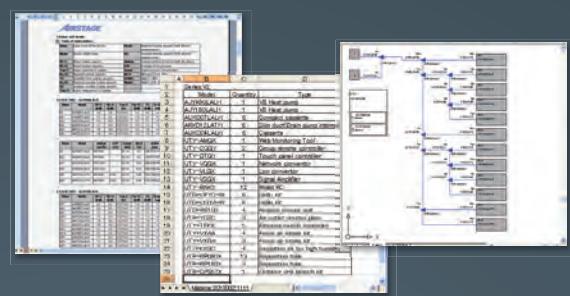

### Update your Design Simulator

Database can be easily updated online using AutoUpdate function through FTP.




# BIM Building Information Modeling

Fujitsu General provides the Building Information Modeling (BIM) object models and contents for our VRF system and some products to the architect, designer and contractor using Autodesk® Revit® technology from our Website and Autodesk® Seek Website, etc.


## 3D and 2D product data

We provide 3D data that closely resemble the actual product appearance. 2D CAD design operations are supported and 2D display is also provided. The data can also be output in other formats, such as DXF and DWG, which are used by other design CAD.

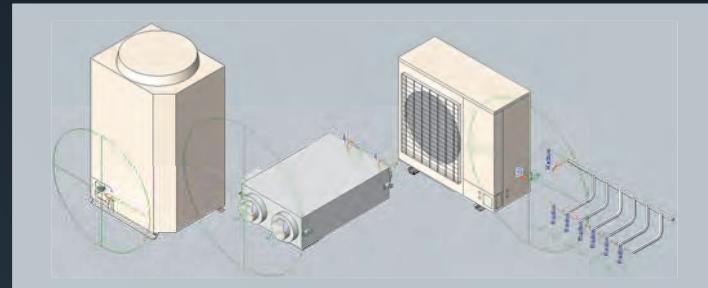


## Installation limitation

The equipment installation limitation range is shown. Installation requirements, such as distance from the wall, is automatically displayed to make it easy to produce highly reliable layout designs.

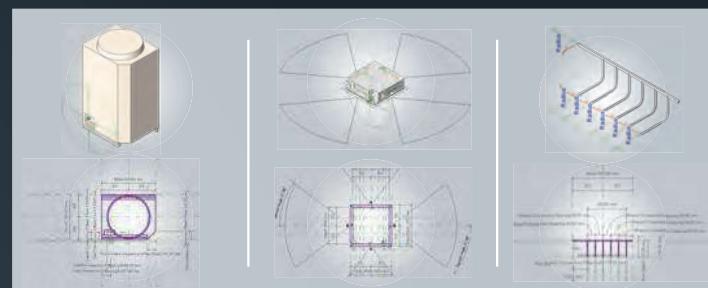


## Installation information

Other information, such as symbols showing the airflow direction that are required for installation drawings, is built in and can be automatically reflected in 2D drawings. Installation drawings can be created easily.

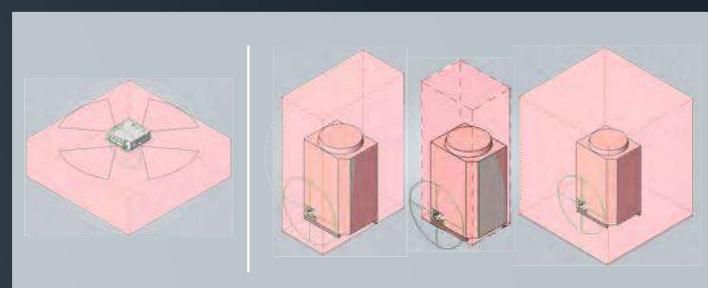

## Product specifications & link information

Contains the basic information required for air conditioner design, including unit size, capacity, input power, noise, and airflow rate. These data can be procured from the Fujitsu General Website, Design Simulator, and Autodesk® Seek Website.

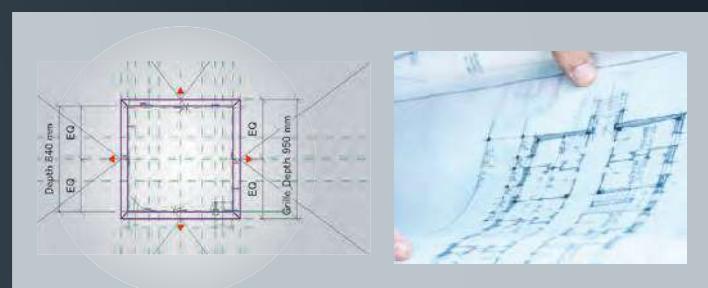

## SUPPORT

# WATERSTAGE™ SUPPORT TOOL

Fujitsu General's new software for the WATERSTAGE™ automatically provides a combination of WATERSTAGETM equipments just by giving few parameters.  
The software is featured with multiple languages, and automatic update function.

## WATERSTAGE™ Proposer

### Model selection with detailed technical information

- The software automatically selects the equipments just by inputting some factors, like the region where the equipment is installed, required capacity to heat up the space, and a heating method.
- The transition in the equipment capacity at each outdoor temperature condition and/or when back up heater is under operation can be easily created by this software.



The visible images of the optional items enable the correct configuration of the systems. All of the associated optional items are automatically chosen in a case the application requires several devices of the WATERSTAGE™ equipments.



The entire system configuration can be reviewed and modified once the units are selected. And by seeing the images and the list of equipments at the same time, it avoids mistake in the selection of equipments.



The software automatically provides graphs of monthly running cost, CO<sub>2</sub> emission volume, cost comparison against other heating sources, and other data to allow the users to see at a glance the financial benefit of choosing WATERSTAGE™ equipments.




## WATERSTAGE™ Package label creator

### Energy labels and Fiches can be downloaded from our homepage

You can find and download the ErP documents (energy labels, product fiches, pre-configured package labels, pre-configured package fiches, information sheets and EC Declaration) from our homepage.

In addition, we will provide a internet service to allow the various package labels and package fiches to be created easily by installers in the future.

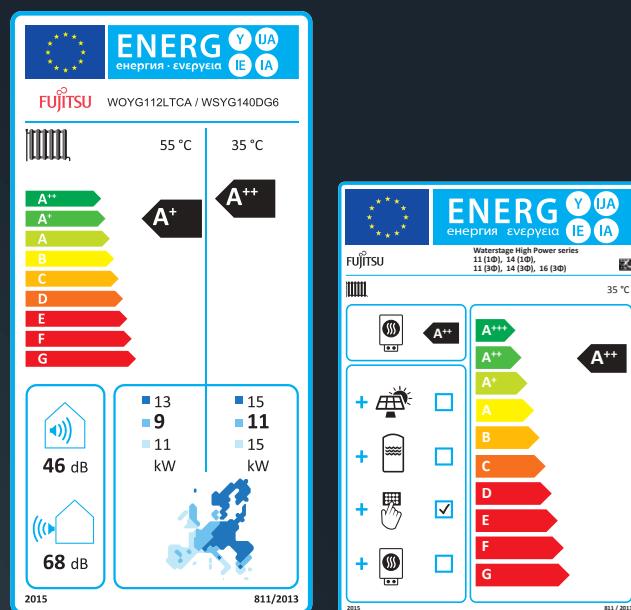


## SUPPORT

# QUICK SERVICE & MAINTENANCE

If trouble should occur in a unit or system, abundant support tools such as trouble code display at the product, Service Tool that allows checking of the detailed status of the entire system, and remote monitoring tool that uses the internet, etc. support quick service and maintenance anywhere and at any time.

## Mobile troubleshooting tool for iPhone & Android

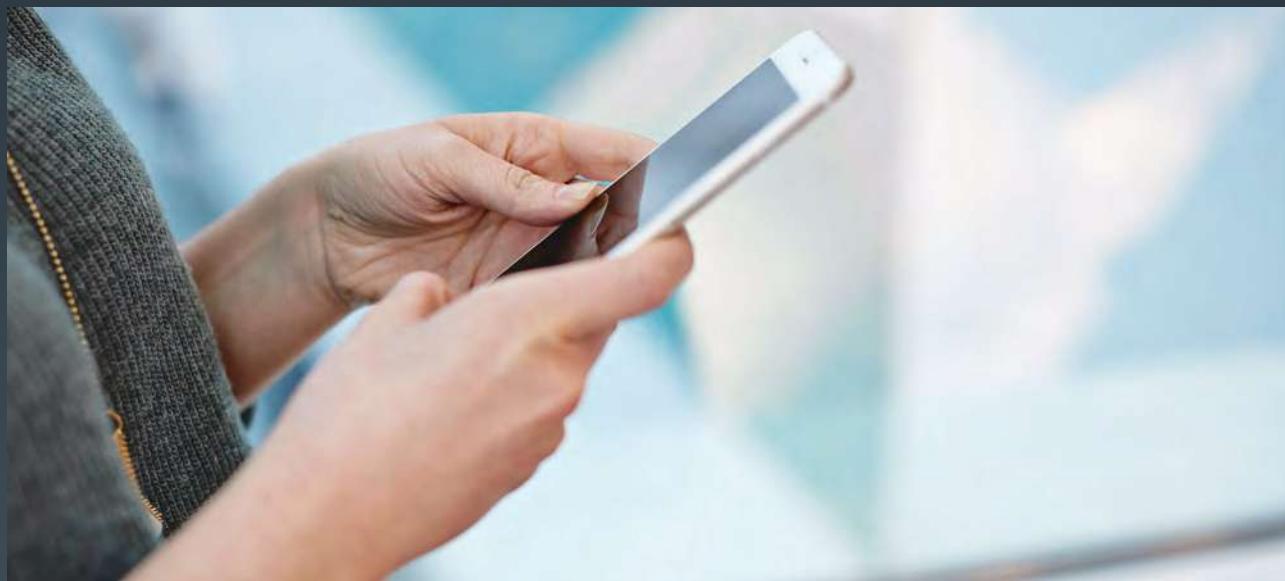

We will release an App of troubleshooting tool for iPhone, iPod touch and other Apple products. This application is a troubleshooting tool for Fujitsu General air conditioner (RAC/PAC, VRF)

It helps you to check air conditioner condition. Error code check, Troubleshooting, and Sensor check are available.




## Easy maintenance & monitoring

### Design for easy maintenance

The air conditioner operating status and trouble status of the detailed are displayed at the 7-segment of the outdoor unit PCB or on the remote controller screen. The unit status can be checked rapidly and quick response is also possible.


- Operation mode status
- Discharge temperature/Pressure status
- Compressor operation indication
- Address/Type/Number of outdoor unit
- Error code.

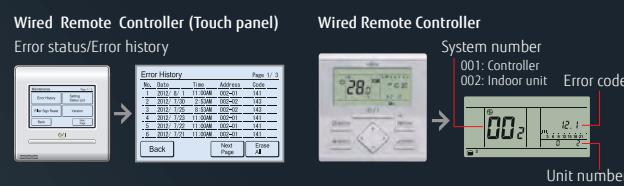

### Error diagnosis by Service Tool


The unit status details from single split models to VRF system can be checked on PC screen by connecting Service Tool. Quick countermeasures can be taken

- Operation status/control
- Monitoring operating condition
- Monitoring sensor data
- Indication of trend graph
- Error history
- Indication of refrigerant circuit diagram (For VRF)

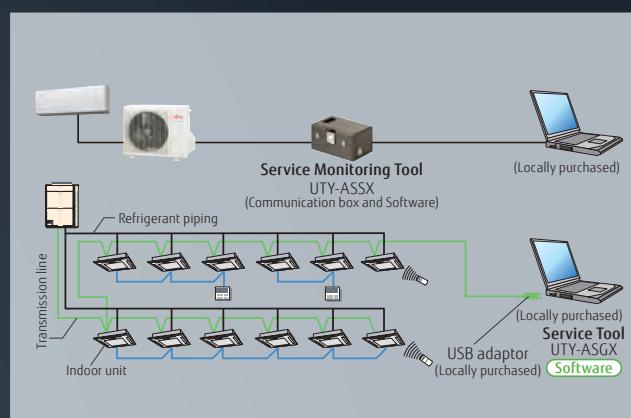

### Remote monitoring

VRF system operating status and trouble status details can be constantly and remotely monitored over the Internet, etc. Rapid cooperation with the service personnel are also possible.

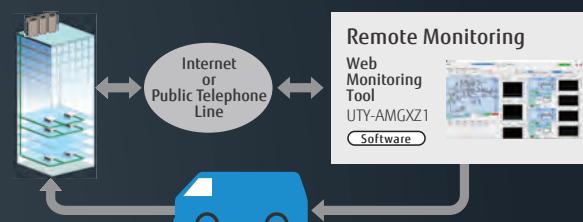

## SUPPORT


# SERVICE TOOL

### Extensive monitoring and analysis functions for installation and maintenance

- Operation status can be checked and analyzed to detect even the smallest abnormalities
  - Storage of data on system operation status on a PC allows access even from off site.
  - Up to 400 indoor units (a single VRF network system) can be controlled and monitored for large scale buildings or hotels
  - This software can be connected to any point of transmission line with USB adaptor (locally purchased)
- \* The saved data can be displayed offline. However, the data saved by the following model cannot be displayed.
- UTR-YSTB/UTR-YSTC (Service Tool)
  - UTR-YMSA (Web Monitoring Tool)


### Automatic operation check for refrigeration cycle

After product installation, operation check can be performed automatically. Self-diagnosis function automatically judges whether each sensor value is normal, so the operation check work can be reduced. The diagnosis can also be output as a report.

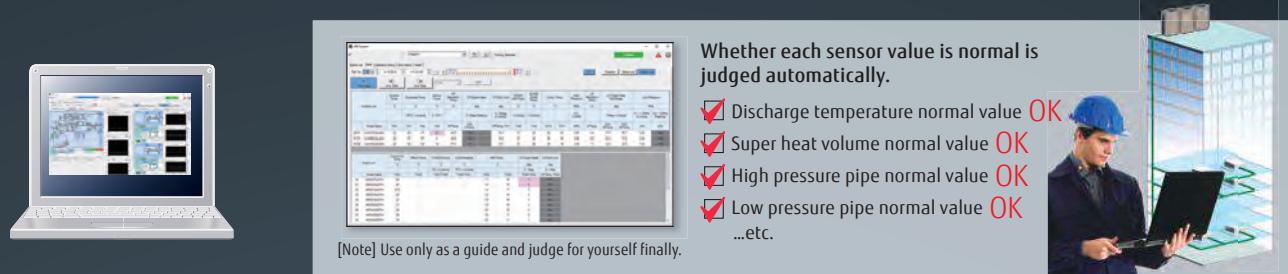

### Remote technical support & maintenance

On-site check screen can be shared with the skilled person in a distant place. When visiting for troubleshooting on site, operation status can be shared in real time and get assistance easily. Online chat function helps to support on site staff.

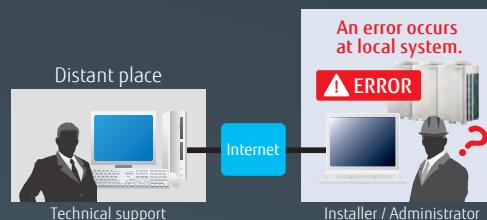

### Various trend graph display

Previously, only 3 kinds of each sensor value can be displayed. However, multiple graphs can be displayed in new Service Tool depending on the situation. The refrigeration cycle can be checked in detail.



#### Personal computer system requirements

|                  | UTY-ASGXZ1   |
|------------------|--|
| Operating system | <ul style="list-style-type: none"><li>• Microsoft® Windows® 7 Professional (32-bit or 64-bit) SP1</li><li>• Microsoft® Windows® 8.1 Pro (32-bit or 64-bit)</li><li>• Microsoft® Windows® 10 Pro (32-bit or 64-bit)</li></ul>                         |
| CPU              | 1 GHz or higher  |
| Memory           | <ul style="list-style-type: none"><li>• 1 GB or more (for Windows® 7 [32-bit], Windows® 8.1 [32-bit], and Windows® 10 [32-bit])</li><li>• 2 GB or more (for Windows® 7 [64-bit], Windows® 8.1 [64-bit], and Windows® 10 [64-bit])</li></ul>          |
| HDD              | 40 GB or more of free space  |
| Display          | 1366 x 768 or higher resolution  |
| Interface        | <ul style="list-style-type: none"><li>• 2 USB ports<ul style="list-style-type: none"><li>- 1 USB port is required for software protection key connection</li><li>- 1 USB port is required for Echelon® U10 USB Network Interface</li></ul></li></ul> |
| Software         | Internet Explorer® 11 or Microsoft Edge / Adobe® Reader® 9.0 or later  |

#### <Packing list>

| Name and shape                             | Quantity | Application  |
|--|----------|--|
| WHITE-USB-KEY<br>(Software protection key) | 1        | Software protection key to be connected to USB port on the Service Tool-installed PC.<br>These products run only on a PC with WibuKey. |

\*Personal computer that satisfies the following system requirements

\*Echelon® U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R) (Required for each VRF Network.)


# WEB MONITORING TOOL

## Product features

- Troubleshooting is performed by monitoring each air conditioning unit remotely during periodical system checks.
- Error notification can be automatically transmitted to several locations using the internet\*1.
- Requires either a dedicated internet connection or public telephone line.
- Determination of an error occurrence can be made through error warnings and equipment status information obtained from a remote location.
- The monitoring data in a remote side can be optionally downloaded. And, this data can be displayed in offline mode of the service tool.
- Monitoring side computer is not required to install special software, requires only general web browser.

\*1: Use of internet mail system required.


## Web Monitoring System

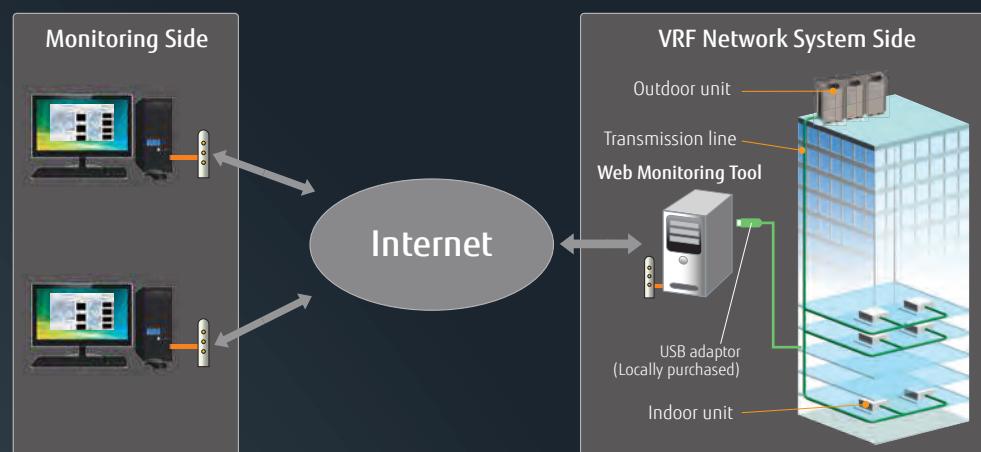

## Support 4 VRF network systems

USB adaptor (max. 4 adaptors per PC) permit monitoring of up to 1,600 indoor units.

Suitable for large-scale buildings or hotels.

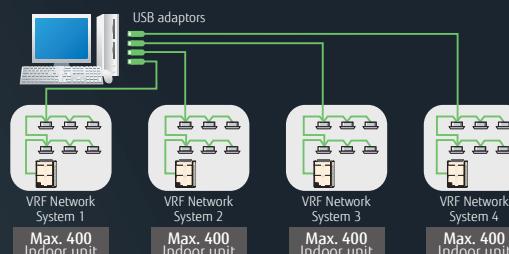

## Personal computer system requirements

|                  | UTY-AMGXZ1   |
|------------------|--|
| Operating system | <ul style="list-style-type: none"><li>• Microsoft® Windows® 7 Professional (32-bit or 64-bit) SP1</li><li>• Microsoft® Windows® 8.1 Pro (32-bit or 64-bit)</li><li>• Microsoft® Windows® 10 Pro (32-bit or 64-bit)</li></ul>   |
| CPU              | 1 GHz or higher  |
| Memory           | <ul style="list-style-type: none"><li>• 1 GB or more (for Windows® 7 [32-bit], Windows® 8.1 [32-bit], and Windows® 10 [32-bit])</li><li>• 2 GB or more (for Windows® 7 [64-bit], Windows® 8.1 [64-bit], and Windows® 10 [64-bit])</li></ul>  |
| HDD              | 40 GB or more of free space  |
| Display          | 1366 x 768 or higher resolution  |
| Interface        | <ul style="list-style-type: none"><li>• USB port (for 10 USB Network Interface Max.4, Software protection key)</li><li>• Either of the following interface is required for remote connection:<ul style="list-style-type: none"><li>- Internet using LAN: Ethernet port is required</li></ul></li></ul> |
| Software         | Internet Explorer® 11 or Microsoft Edge / Adobe® Reader® 9.0 or later  |

## <Packing list>

| Name and shape                             | Quantity | Application  |
|--|----------|--|
| WHITE-USB-KEY<br>(Software protection key) | 1        | Software protection key to be connected to USB port on the Service Tool-installed PC.<br>These products run only on a PC with WibuKey. |

\*Personal computer that satisfies the following system requirements

\*Echelon® U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R) (Required for each VRF Network.)

## Notice for specifications

I.U.=Indoor Unit O.U.=Outdoor Unit Qu=Quiet \* =Not decided yet

- Specifications and design are subject to change without notice for future improvement.
- For further details, please check with our authorised dealer.
- Cooling/Heating capacities are based on the following conditions.

|         |   |         |   |
|---------|---|---------|---|
| Cooling | Indoor temp. : 27°C DB/19°C WB<br>Outdoor temp: 35°C DB/24°C WB | Heating | Indoor temp. : 20°C DB<br>Outdoor temp: 7°C DB/6°C WB |
|---------|---|---------|---|

- Performance test is in accordance with EN14511
- Seasonal efficiency test is in accordance with EN14825
- Sound power test is in accordance with EN12102



Fujitsu General (Thailand) Co., Ltd.



ISO 9001 Certified number: 01 100 075229  
ISO 14001 Certified number: 01 104 9245

Fujitsu General (Shanghai) Co., Ltd.



ISO 9001 Certified number: 01 100 79269  
ISO 14001 Certified number: CNBJ312244-UK

Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd.



ISO 9001 Certified number: 15917Q20073R5M  
ISO 14001 Certified number: 15915E10020R4M

- The products or equipments in this catalogue contain fluorinated greenhouse gases.
- "AIRSTAGE" and "WATERSTAGE" worldwide trademarks of FUJITSU GENERAL LIMITED and are registered trademarks in Japan and other countries or areas.
- "nocria" is a worldwide trademark of FUJITSU GENERAL LIMITED.
- "Polaris" is a worldwide trademark of FUJITSU GENERAL LIMITED.
- "DUAL BLASTER & device" is a worldwide trademark of FUJITSU GENERAL LIMITED and is a registered trademark in Japan and other countries or areas.
- iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
- "BACnet" is a trademark or registered trademark of the American Society of Heating, Refrigerating and Air-Conditioning Engineers Inc.
- "MODBUS" is a registered trademark of Schneider Electric.
- "LONWORKS" and Echelon are trademarks of Echelon Corporation registered in the United States and other countries.
- Other company and product names mentioned herein may be registered trademarks, trademarks or trade names of their respective owners.

Distributed by:

**FUJITSU GENERAL LIMITED**

3-3-17, Suenaga, Takatsu-ku, Kawasaki 213-8502, Japan  
<http://www.fujitsu-general.com/>

