

PRODUCT LINEUP: SPLIT

Wall Mounted Designer Range

High Spec & Design




High energy saving

Top class high efficiency is achieved by high efficient lamda heat exchanger, large cross flow fan and new refrigerant.

Rank **A+++** ^{*1}


SEER **8.5** ^{*1} SCOP **5.1** ^{*1}

*1: 07, 09, 12 class

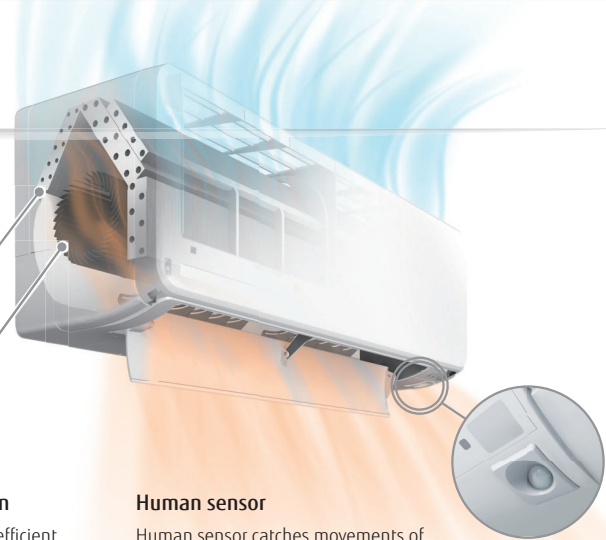


Hybrid-heat exchanger

The heat exchange efficiency has been significantly improved with the large hybrid heat exchanger, attaining the top-level SEER and SCOP.

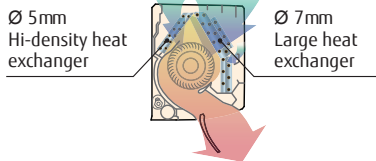


Ø107 Large cross-flow fan

With the large-diameter fan, efficient air volume can be obtained at low power.





Human sensor

Human sensor catches movements of people in a room, and operates with lower capacity when people leave the room. When people come back to the room, it automatically returns to previous operating mode.



Comfortable airflow & Silent operation

The big louver and the new air blowing structure have attained a comfortable air flow that spreads wider to user's feet and silent operation.



19dB(A)
(07/09/12)
Only cooling
14 model is 20dB(A)

Smartphone Control (Option)

Easy air conditioner control from inside or outside the house and office using the Smartphones, Tablets, and PC.



Wireless LAN Interface

The exclusive Wi-Fi adaptor enables to operate the air conditioner by smartphone or tablet PC from outside.

Model: ASYG07KGTA / ASYG09KGTA / ASYG12KGTA / ASYG14KGTA



Wireless R.C.



Specifications

Model No.	Indoor unit		ASYG07KGTA	ASYG09KGTA	ASYG12KGTA	ASYG14KGTA	
	Outdoor unit		AOYG07KGCA	AOYG09KGCA	AOYG12KGCA	AOYG14KGCA	
Power Source			Single-phase, ~230V, 50Hz				
Capacity	Cooling	kW	2.0	2.5	3.4	4.2	
	Heating		2.5	2.8	4.0	5.4	
Input Power	Cooling/Heating	kW	0.400/0.500	0.555/0.560	0.805/0.910	1.175/1.350	
EER	Cooling	W/W	5.00	4.50	4.22	3.57	
COP	Heating		5.00	5.00	4.40	4.00	
Pdesign	Cooling/Heating(-10°C)	kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0	
SEER	Cooling	W/W	8.52	8.52	8.51	7.11	
SCOP	Heating (Average)		5.12	5.11	5.10	4.31	
Energy Efficiency Class	Cooling	A+++		A+++	A+++	A++	
	Heating (Average)	A+++		A+++	A+++	A+	
Max. Operating Current	Cooling/Heating	A	6.5/9.0	6.5/9.0	6.5/9.0	9.0/10.5	
Annual Energy Consumption	Cooling	kWh/a	82	103	140	207	
	Heating		628	658	685	1298	
Moisture Removal		l/h	1.0	1.3	1.8	2.1	
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38/33/29/19	40/34/29/19	40/35/30/19	43/36/30/20
	Indoor (Heating)	H/M/L/Q		41/35/31/21	42/36/31/21	42/38/33/21	44/39/33/24
	Outdoor(Cooling/Heating)	High		46/46	46/48	50/50	50/50
Sound Power Level	Indoor(Cooling/Heating)	High	54/56	55/57	56/58	57/59	
	Outdoor(Cooling/Heating)	High	61/62	61/63	65/66	65/66	
Airflow Rate	Indoor / Outdoor	High	m³/h	650/1610	700/1610	700/1680	770/1680
Net Dimensions H x W x D	Indoor	mm	270×834×215				
		kg(lbs)	10				
Weight	Outdoor	mm	542×799×290				
		kg(lbs)	30	30	31	32	
Connection Pipe Diameter (Liquid / Gas)			6.35/9.52				
Drain hose Diameter (I.D./O.D.)			13.8/15.8 to 16.7				
Max Pipe Length (Pre-Charge)			20 (15)				
Max Height Difference			15				
Operation Range	Cooling	°CDB	-10 to 46				
	Heating		-15 to 24				
Refrigerant	Type (Global Warming Potential)	R32 (675)					
	Charge	kg(CO2eq-T)	0.75 (0.5)	0.75 (0.5)	0.85 (0.6)	0.85 (0.6)	

Optional parts

- Wired Remote Controller: UTY-RNRY22, UTY-RLRY
- External Input and Output PCB: UTY-XCSX22
- Communication kit: UTY-TWRX22
- Wireless LAN Interface: UTY-TFSXW1
- External connect kit: UTY-XW2X

Dimensions

(Unit : mm)

