

PRODUCT LINEUP: SPLIT

NEW

Wall Mounted ECO Range

Comfort for Large Room



ALL DC



Narrow width & Compact Design


Powerful airflow is realized despite 790mm width compact design.



H 293mm
W 790mm
D 249mm


ON-OFF Programmable timer

You can set an integrated ON-OFF or OFF-ON timer suitable for your life style. (Setting time: 0.5, 1, 1.5, 2, 2.5, -----9.5, 10, 11, 12 hours)

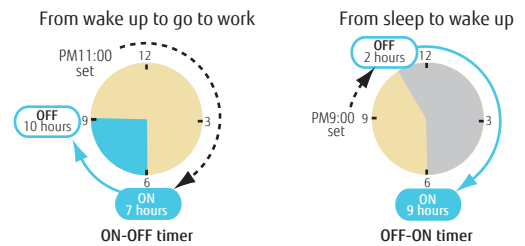


Powerful operation

20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

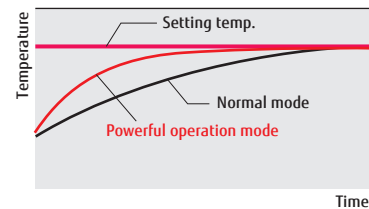


Economy operation

Setting temp. is shifted by 1°C automatically.

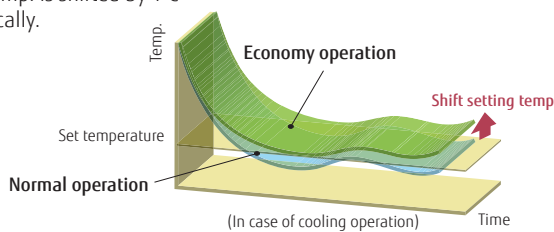

Low ambient operation

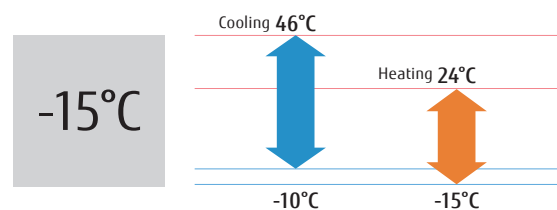

Model: ASYG18KLCA / ASYG24KLCA



Wireless R.C.



For ASYG18KLCA



For ASYG24KLCA

Specifications

			Tentative	
Model No.	Indoor unit		ASYG18KLCA	ASYG24KLCA
	Outdoor unit		AOYG18KLTA	AOYG24KLTA
Power Source			Single-phase, ~230V, 50Hz	
Capacity	Cooling	kW	5.2 (-)	7.1 (-)
	Heating		6.3 (-)	8.0 (-)
Input Power	Cooling/Heating	kW	2.080/-	2.700/-
EER	Cooling	W/W	2.65	2.65
COP	Heating		3.38	2.97
Pdesign	Cooling/Heating (-10°C)	kW	*5.0	5.0/6.4
SEER	Cooling	W/W	5.10	5.10
SCOP	Heating (Average)		3.80	3.80
Energy Efficiency Class	Cooling		A	A
	Heating (Average)		A	A
Max. Operating Current	Cooling/Heating	A	9.0/13.0	13.0/17.0
Annual Energy Consumption	Cooling	kWh/a	-	-
	Heating		-	-
Moisture Removal		l/h	-	-
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	48/-/-/-
	Indoor (Heating)	H/M/L/Q		50/-/-/-
	Outdoor(Cooling/Heating)	High		50/49
Sound Power Level	Indoor(Cooling/Heating)	High	-	-
	Outdoor(Cooling/Heating)	High	-	-
Airflow Rate	Indoor / Outdoor	High	m³/h	-
Net Dimensions H x W x D	Indoor	mm	293×790×249	293×790×249
		kg(lbs)	9.5	9.5
Weight	Outdoor	mm	542×799×290	632×799×290
		kg(lbs)	32	35
Connection Pipe Diameter (Liquid / Gas)		mm	6.35/9.52	6.35/12.70
Drain hose Diameter (I.D./O.D.)		mm	-	-
Max Pipe Length (Pre-Charge)		m	25 (15)	30 (15)
Max Height Difference			20	25
Operation Range	Cooling	°CDB	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32(675)	R32(675)
	Charge	kg(CO2eq-T)	0.85(0.57)	1.10(0.74)

Optional parts

Remote Controller Holder: UTZ-RXLA

Dimensions

(Unit : mm)

