



**PRODUCT LINEUP: SPLIT**

**Wall Mounted  
ECO Range**  
Compact & Comfort

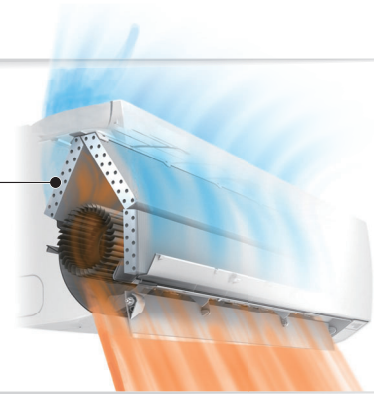


**High efficient compact design**

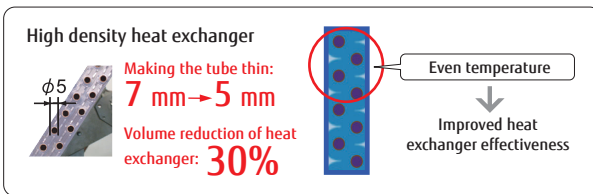


**ON-OFF Programmable timer**

You can set an integrated ON-OFF or OFF-ON timer suitable for your life style. (Setting time: 0.5, 1, 1.5, 2, 2.5, ----9.5, 10, 11, 12 hours)

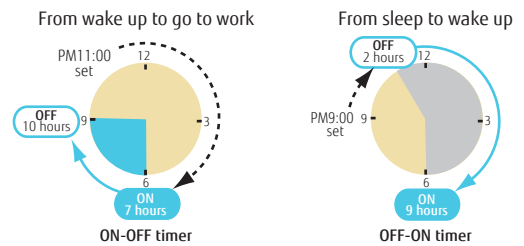


**Powerful operation**

20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

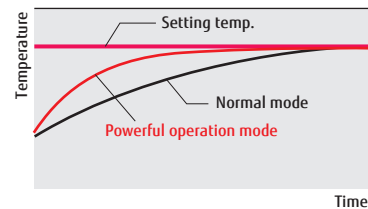


**Economy operation**

Setting temp. is shifted by 1°C automatically.

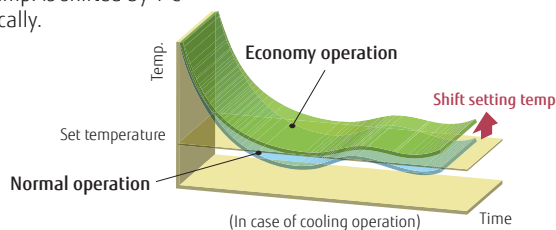

**Low ambient operation**

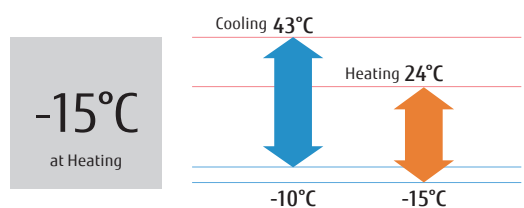

**Model: ASYG07LLCE / ASYG09LLCE / ASYG12LLCE**


Wireless R.C.


**Specifications**

Model No.	Indoor unit		ASYG07LLCE	ASYG09LLCE	ASYG12LLCE
	Outdoor unit		AOYG07LLCE	AOYG09LLCE	AOYG12LLCE
Power Source			Single-phase, ~230V, 50Hz		
Capacity	Cooling	kW	2.0(0.9-2.8)	2.5(0.9-3.0)	3.4(0.9-3.8)
	Heating		2.7(0.9-3.6)	3.0(0.9-3.8)	4.0(0.9-5.0)
Input Power	Cooling/Heating	kW	0.470/0.620	0.730-0.740	1.080/1.130
EER	Cooling	W/W	4.26	3.42	3.15
COP	Heating		4.35	4.05	3.54
Pdesign	Cooling/Heating(-10°C)	kW	2.0/2.2	2.5/2.3	3.4/3.2
SEER	Cooling	W/W	6.70	6.90	6.60
SCOP	Heating (Average)		4.00	4.00	3.80
Energy Efficiency Class	Cooling		A++	A++	A++
	Heating (Average)		A+	A+	A
Max. Operating Current	Cooling/Heating	A	6.0/7.5	6.0/7.5	6.5/9.0
Annual Energy Consumption	Cooling	kWh/a	104	127	180
	Heating		770	805	1,179
Moisture Removal		l/h	1.0	1.3	1.8
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	43/38/33/22	43/38/33/22
	Indoor (Heating)	H/M/L/Q		43/38/33/22	43/38/33/22
	Outdoor(Cooling/Heating)	High		47/48	47/48
Sound Power Level	Indoor(Cooling/Heating)	High	59/60	59/60	59/60
	Outdoor(Cooling/Heating)	High	61/61	61/61	65/65
Airflow Rate	Indoor / Outdoor	High	m <sup>3</sup> /h	720/1,670	720/1,670
Net Dimensions H x W x D Weight	Indoor	mm	262×820×206	262×820×206	262×820×206
		kg(lbs)	7.0(15)	7.0(15)	7.0(15)
	Outdoor	mm	535×663×293	535×663×293	535×663×293
		kg(lbs)	24(53)	24(53)	26(57)
Connection Pipe Diameter (Liquid / Gas)		mm	6.35/9.52	6.35/9.52	6.35/9.52
Drain hose Diameter (I.D./O.D.)		mm	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max Pipe Length (Pre-Charge)		m	20(15)	20(15)	20(15)
Max Height Difference			15	15	15
Operation Range	Cooling	°CDB	-10 to 43	-10 to 43	-10 to 43
	Heating		-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R410A(2,088)	R410A(2,088)	R410A(2,088)
	Charge	kg(CO <sub>2</sub> eq-T)	0.65(1.4)	0.65(1.4)	0.85(1.8)

**Optional parts**

Remote Controller Holder: UTZ-RXLA

**Dimensions**

(Unit : mm)

